
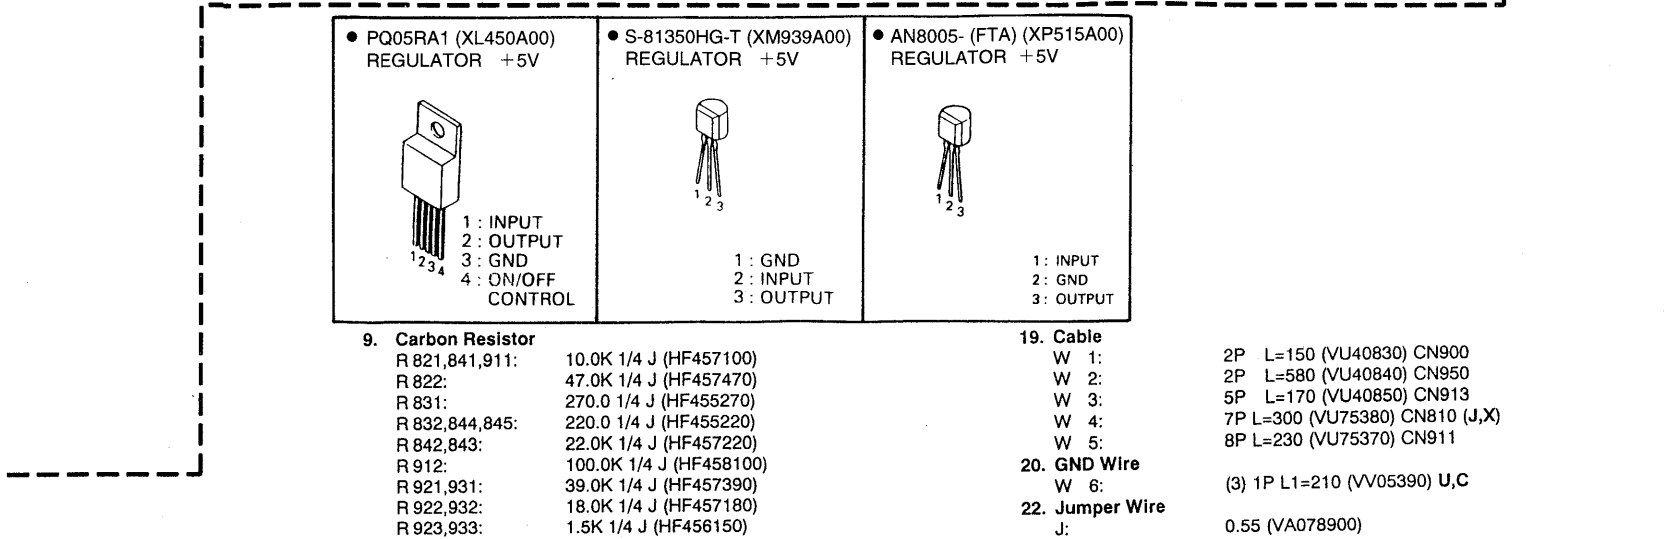
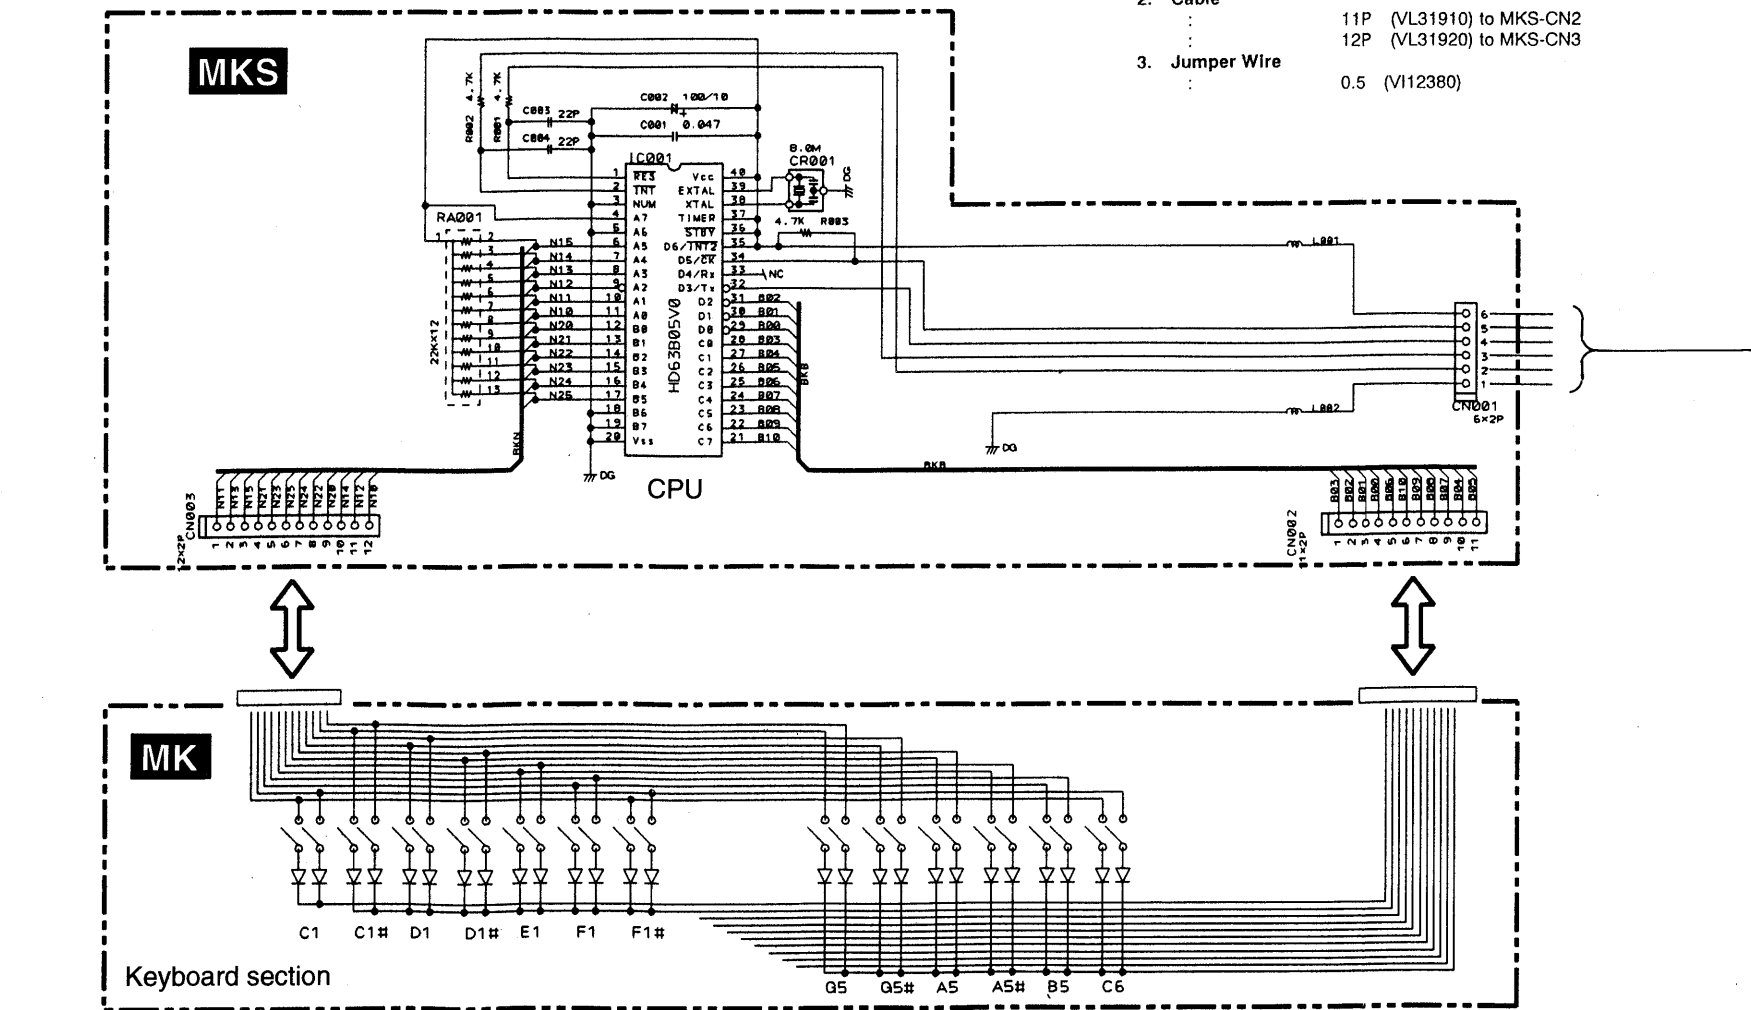
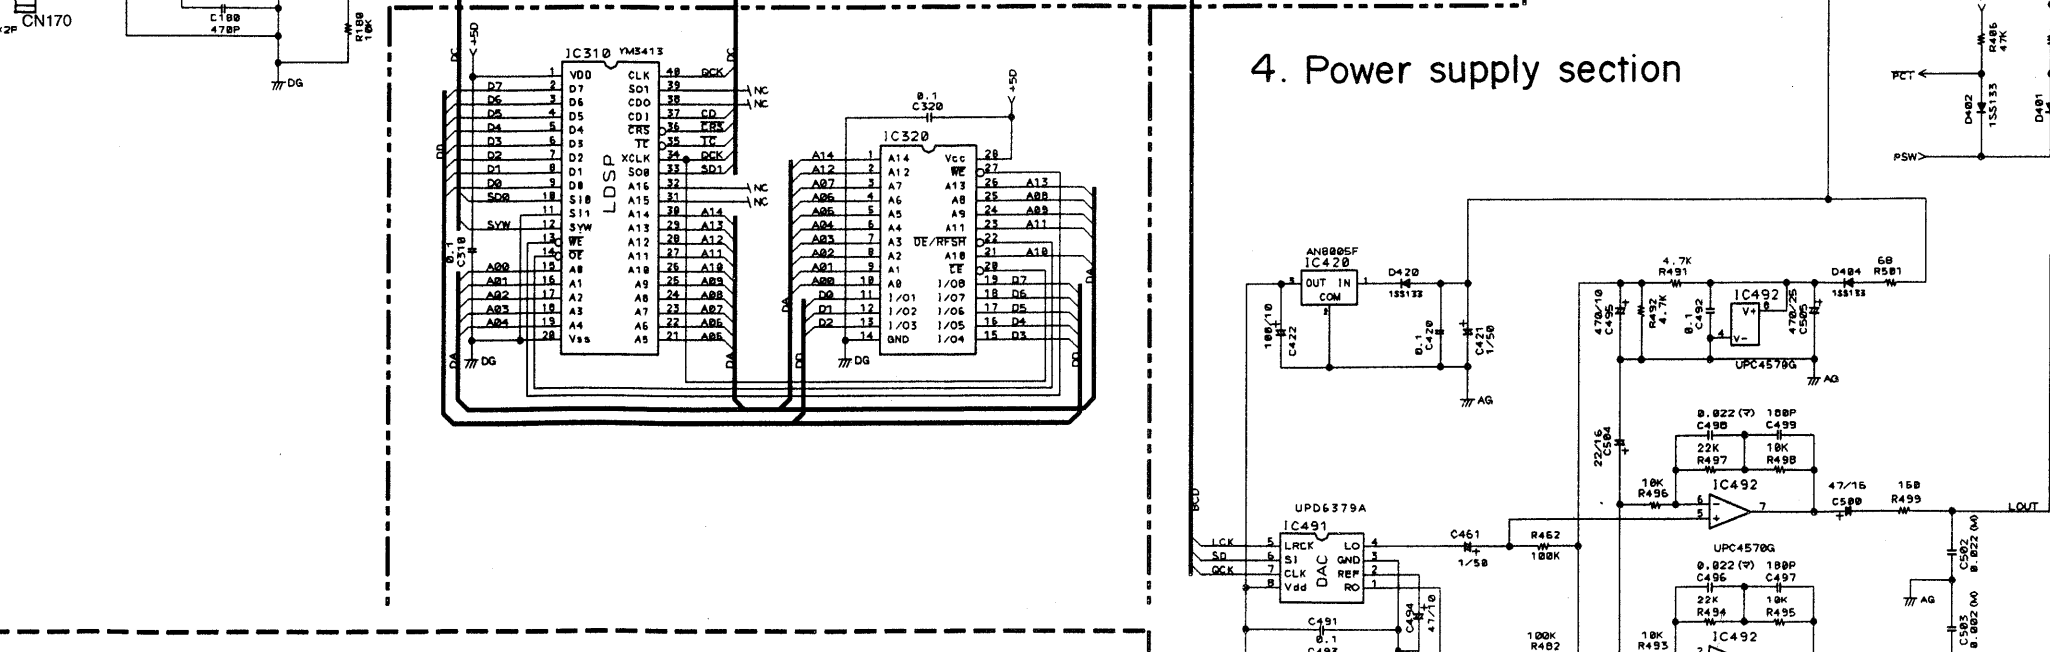
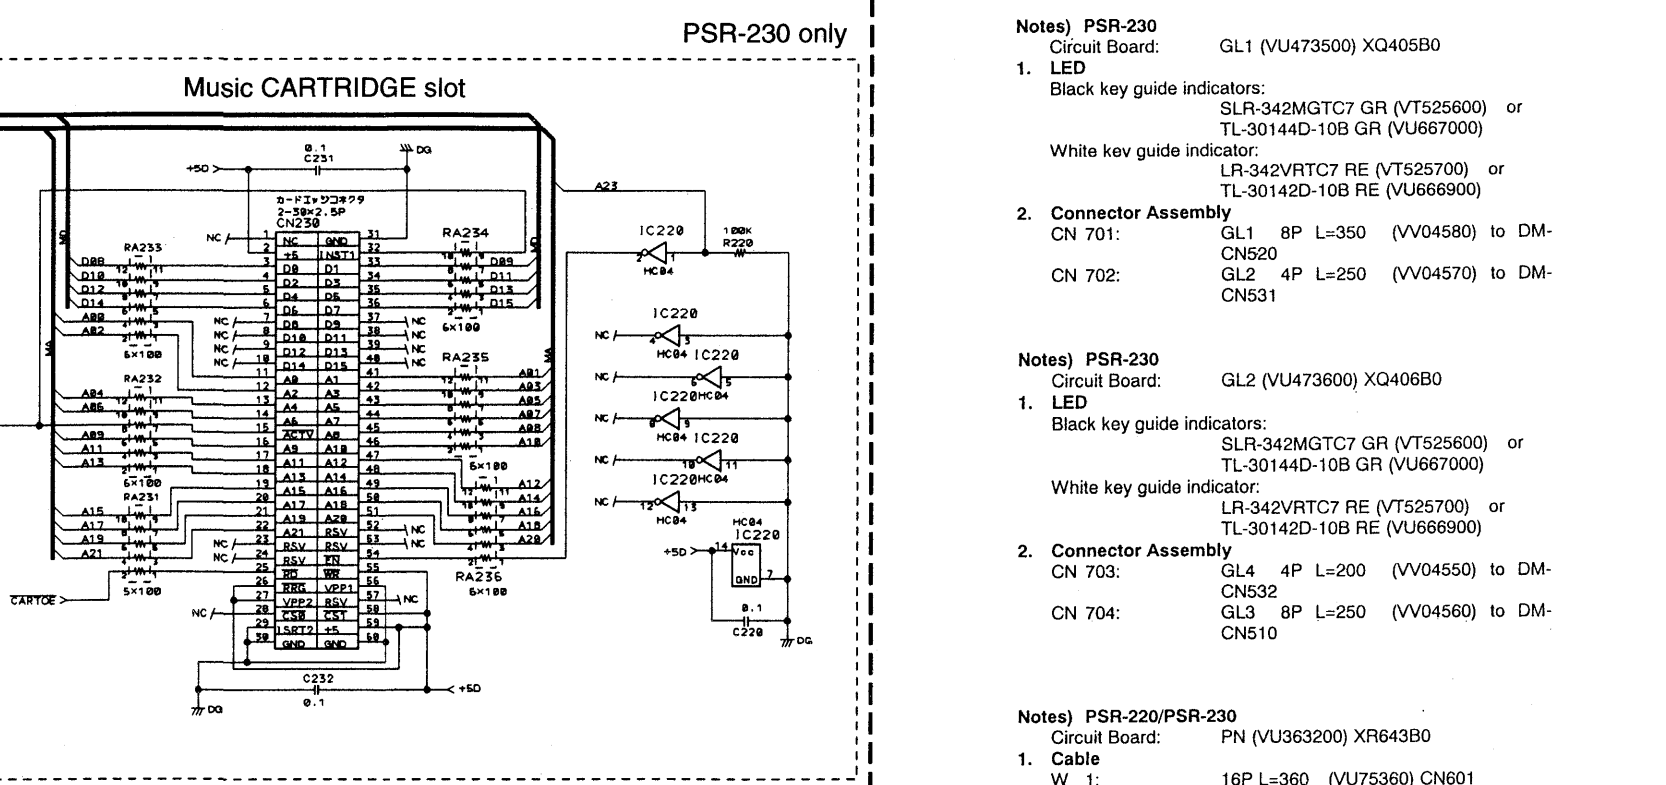



5. Panel I/O section PSR-230 only

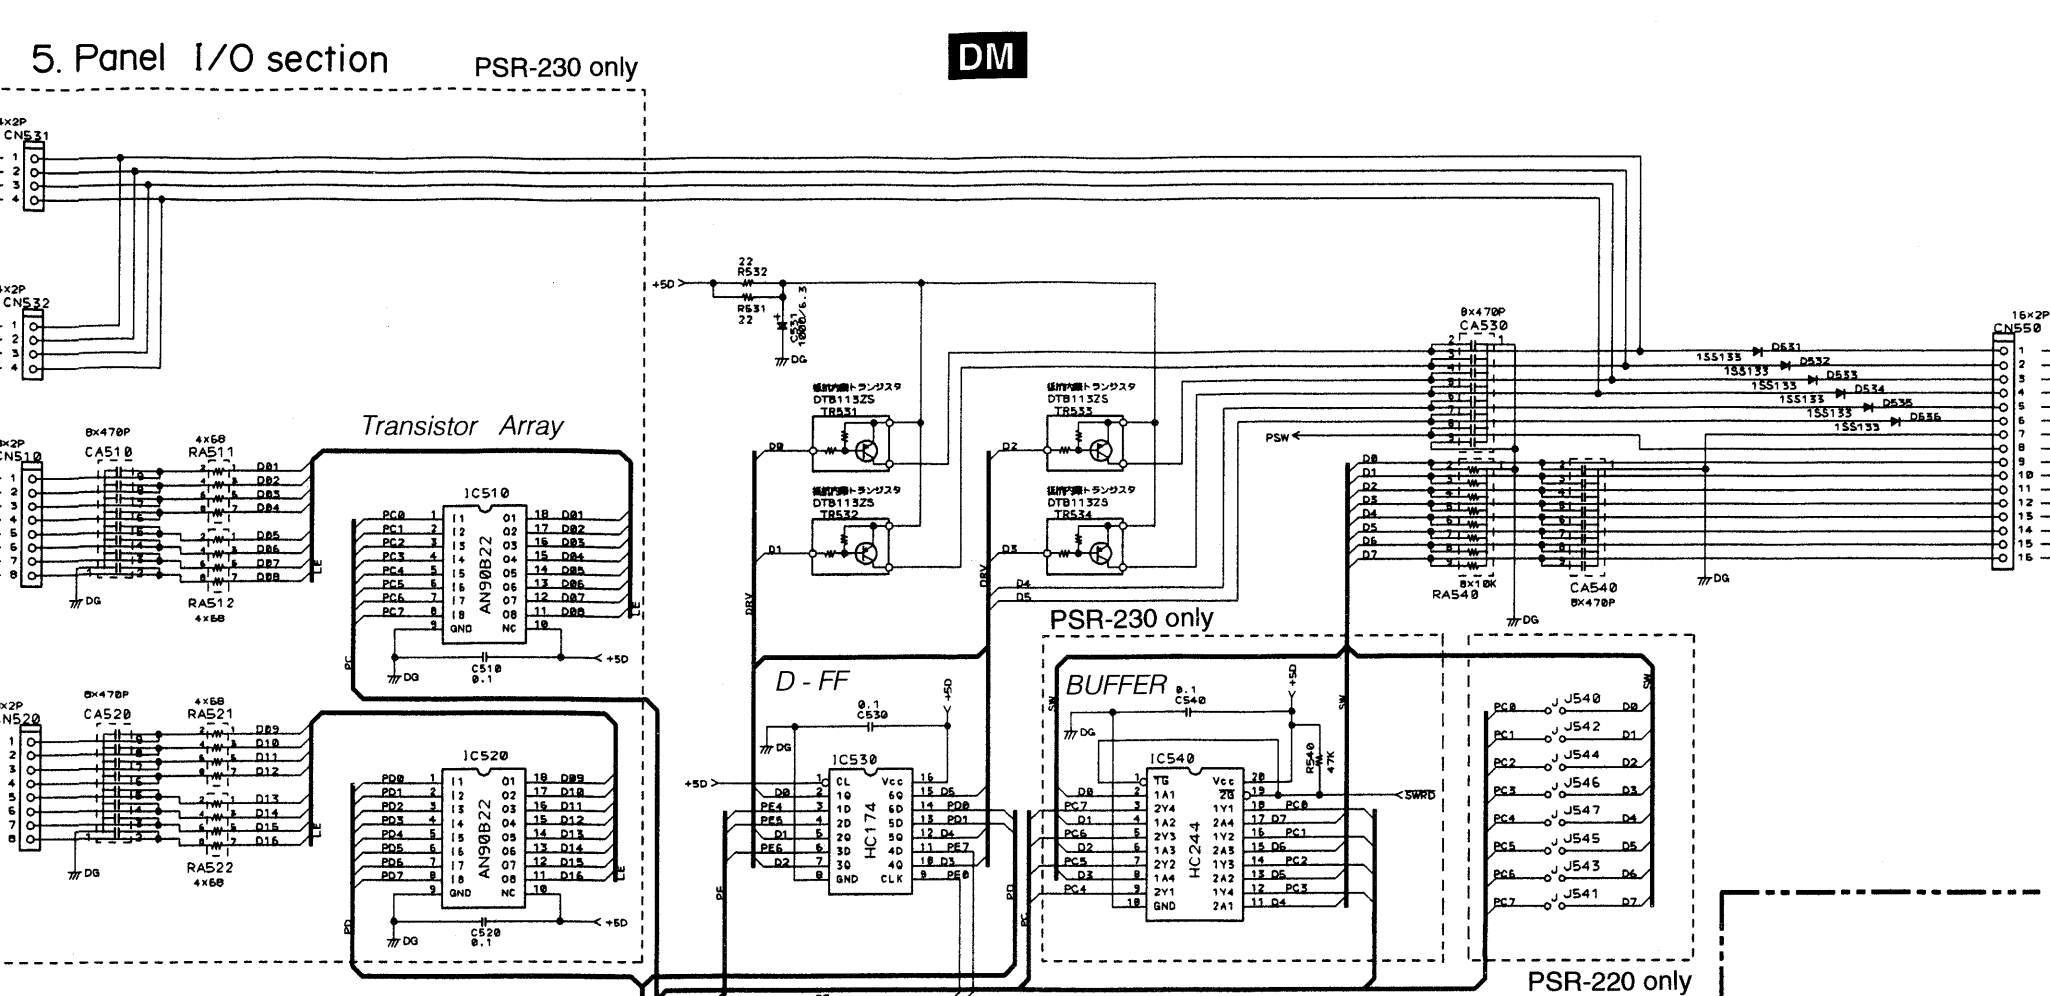

- | | | |
|---|---|--|
| <p>XPR4280 (4X)
XPR4280 (4C)
TL2 (M5M3A00) POWER
(C1B185M0)
S10 (VD63100)
23600
(1900)
(UAS54470)
(ZG34410)
S10B181160
(F0612820)
(F0651470)
(U749470)
(U749480)
(U813730)
(J328100)
(U8137470)
(J866100)</p> | <p>R 941 244,961,962: 2.2 1/4 (JHF45320)
R 943,953: 50 0 1/4 J (HF45480)
R 944,964: 330 0 1/4 J (HF45530)
20 Rotary Variable Resistor
VR 910 A10K2 EWENCOFH6 (VG20200)
11. Line Filter
L 800: SU10V0-10020 (HV227500)
12. Coil
L 801-831,832,833,841-843,910,841,851: FL5R200DKT 20k (Vb355000) or
13. Phone Jack
YK821-5012 (B20) YK821-5002 (B20) YK821-5000 (B20) SUSTAIN
YK821-5000 (LB311670) PHONESIAUS
JK 910:
14. DC IN Connector
JK 900: HE2300 (VY84500) DC IN 10-12V
15. DIN Connector
JK 830: SP-YK910-500 (VJ107200) MIDI IN
JK 840: SP-YK910-5000 (VJ107200) MIDI OUT
16. Base Post Connector
CN 800: XH-2P (LB918020) to batteries
17. Cable Holder
CN 910: S104H-7P (VIB78850) to DM-CN180
CN 911: S104H-8P (VIB78600) to DM-CN400
CN 912: S104H-8P (VIB78300) AM12 to AM2Z-CN815
CN 913: S104H-8P (VIB78300) AM22 to</p> | <p>Notes PSR-220(PSR-230)
Circuit Board: LCD (VJ523400) XPR7280
1. IC: KS0706780-00 (K7R33A00) LCD DRIVE
IC 1: F 0 100 25V Z (U824510)
2. Monolithic Ceramic Cap
C 1: F 0 100 25V Z (U824510)
3. Monolithic Ceramic Cap
C 1: 0.1000 25V M (VD309000)
4. Carbon Resistor
R 1,2,3,4,5: 2.2K 1/4 J (HF75620)
5. Carbon Resistor (chip)
R 1,2,3,4,5: 2.2K 0.1 J (VD56620)
R 6: 91 0K 0.1 J (VIB8960)
6. Cable Holder
CN 180: S104H-10P TE (VIB78800) to DM-CN160
7. Cable
W 1: 10P L-300 (VJ524800) CN1</p> |
|---|---|--|

Notes	PSR-220/PSR-230
Circuit Board:	LCD (VJ524200) XR67280
1. IC	K50076BQ-00 (XR793A00) LCD DRIVE
IC 1.2	0.0100 25V Z (JUB245100)
2. Monolithic Ceramic Cap.	
Semiconductive Cer. Cap.	
C 1.2	0.1000 25V M (V9393090)
Carbon Resistor	
R 1.2,3,4,5.	2.2K 1/4 J (HF756220)
Carbon Resistor (chip)	
R 1.2,3,4,5.	2.2K 0.1 J (RD256220)
R.B.	91.0K 1/10 D (V1199900)
Cable Holder	
CN 1.	51048-10P (T8788800) to DM-CN160
7. Cable	
W 1.	10P L=300 (VJ524800) CN1