

# HITACHI

## SERVICE MANUAL

NTSC

AP34, AP33B Chassis

PA

No. 0026

60SX3B/4K  
50SX5P

R/C: CLU-850GR  
CLU-609  
CLU-950GR\*

\*The CLU-950GR remote control (or similar Hitachi remote with identical "PICTURE" and "SOUND" remote control codes) is necessary in order to perform the DIGITAL CONVERGENCE ADJUSTMENT.

### CONTENTS

SAFETY PRECAUTIONS .....	3
SERVICING PRECAUTIONS .....	6
TECHNICAL CAUTIONS .....	9
SPECIFICATIONS .....	10
CIRCUIT PROTECTION .....	10
GENERAL INFORMATION .....	11
ADJUSTING PICTURE AND SOUND FUNCTIONS .....	12
SELF CHECK REPAIR CODES .....	14
CONVERGENCE ADJUSTMENT .....	14
DIGITAL CONVERGENCE ADJUSTMENT .....	15
CAUTIONS WHEN CONNECTING/DISCONNECTING THE HV CONNECTOR .....	18
BLOCK DIAGRAM .....	19
PROTECTION CIRCUIT BLOCK DIAGRAM .....	23
BASIC CIRCUIT DIAGRAM .....	24
WAVEFORMS AT EACH SECTION .....	56
PRINTED CIRCUIT BOARDS .....	60
WIRING DIAGRAM .....	71
EXPLODED VIEW .....	83
REPLACEMENT PARTS LIST .....	87

**CAUTION:** Before servicing this chassis, it is important that the service technician read the "Safety Precaution" and "Product Safety Notices" in this Service Manual.

### SAFETY NOTICE

#### USE ISOLATION TRANSFORMER WHEN SERVICING

Components having special safety characteristics are identified by a  on the schematics and on the parts list in this Service Data and its supplements and bulletins. Before servicing the chassis, it is important that the service technician read and follow the "Safety Precautions" and "Product Safety Notices" in this Service Manual.

\*For continued x-radiation protection, replace picture tube with original type or Hitachi approved equivalent type.

---

**SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT**

---

## PROJECTION COLOR TELEVISION

October 1993      HHEA - MANUFACTURING DIVISION

This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual.

Improperly performed repairs can adversely affect the safety and reliability of the product and may void warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.

**WARNING**


Lead in solder used in this product is listed by the California Health and Welfare agency as a known reproductive toxicant which may cause birth defects or other reproductive harm (California Health and Safety Code, Section 25249.5).

When servicing or handling circuit boards and other components which contain lead in solder, avoid unprotected skin contact with solder. Also, when soldering do not inhale any smoke or fumes produced.

This television receiver provides display of television closed captioning in accordance with section 5.119 of the FCC rules.

## SAFETY PRECAUTIONS


1. Before returning an instrument to the customer, always make a safety check of the entire instrument, including but not limited to the following items:
  - a. Be sure that no built-in protective devices are defective and/or have been deleted during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including but not limited to, nonmetallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. **Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning. Servicers who defeat safety features or fail to perform safety checks may be liable for any resulting damage.**
  - b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to (1) spacing between the picture tube and cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.
  - c. **Antenna Cold Check** — With the instrument AC plug removed from any AC source, connect an electrical jumper across the two AC plug prongs. Place the instrument AC switch in the on position. Connect one lead of an ohmmeter to the AC plug prongs tied together and touch the other ohmmeter lead in turn to each tuner antenna input exposed terminal screw and, if applicable, to the coaxial connector. If the measured resistance is less than 1.0 megohms or greater than 5.2 megohms, an abnormality exists that must be corrected before the instrument is returned to the customer. Repeat this test with the instrument AC switch in the off position.
  - d. **Leakage Current Hot Check** — With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.0 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument AC switch first in the on position and then in the off position, measure from a known earth ground (metal waterpipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle bracket, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.1 millamps. Reverse the instrument power cord plug in the outlet and repeat test.

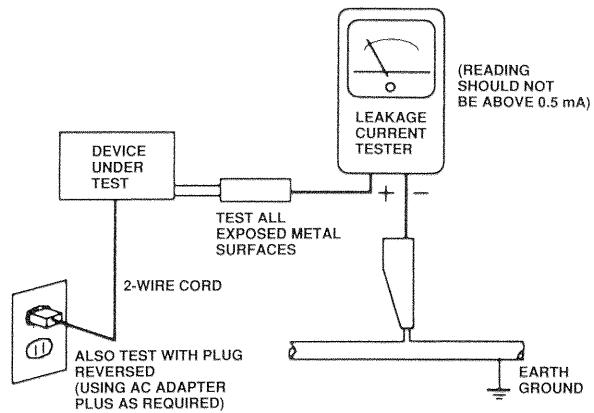

**ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER OR BEFORE CONNECTING THE ANTENNA OR ACCESSORIES.**

- e. **High Voltage** — This receiver is provided with a hold down circuit for clearly indicating that voltage has increased in excess of a predetermined value. Comply with all notes described in this Service Manual regarding this hold down circuit when servicing, so that this hold down circuit may correctly be operated.
  - f. **Serviceman Warning** — With minimum contrast and brightness, operating high voltage in this receiver is lower than **31.6kV** for the AP33B chassis (**33.6kV** for the AP34 chassis). In case any component having influence on high voltage is replaced, confirm that high voltage with minimum contrast and brightness is lower than **31.6kV** for the AP33B chassis (**33.6kV** for the AP34 chassis).
- To measure H.V. use a high impedance H.V. meter. Connect (-) to chassis earth and (+) to the CRT anode button. (See the following connection diagram.)

**Note:** Turn power switch off without fail before the connection to the anode button is made.

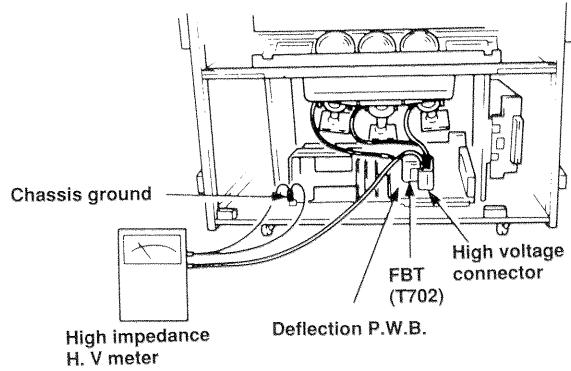

g. **X-radiation — TUBE:** The primary source of X radiation in this receiver is the picture tube. The tube utilized for the above mentioned function in this chassis is specially constructed to limit X radiation emissions.



For continued X radiation protection, the replacement tube must be the same type as the original, HITACHI approved type.

When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, avoid being unnecessarily close to the picture tube and the high voltage component.

Do not operate the chassis longer than is necessary to locate the cause of excessive voltage.

#### h. **X-Radiation Shield —**

- 1) This receiver is provided X-ray shield plates for the protection of X-radiation. Do not remove X-ray shield plates A, B, C, or D shown in Fig. 1 unnecessarily, when troubleshooting and/or making test measurements.
- 2) To prevent X-radiation, after replacement of picture tube and lens, confirm these components to be fixed correctly to bracket and cabinet, and not to be taken off easily.

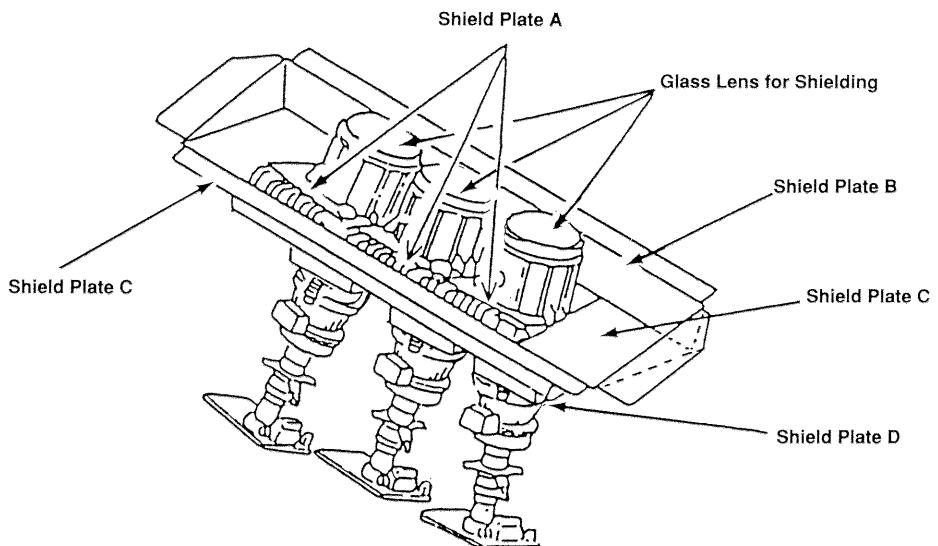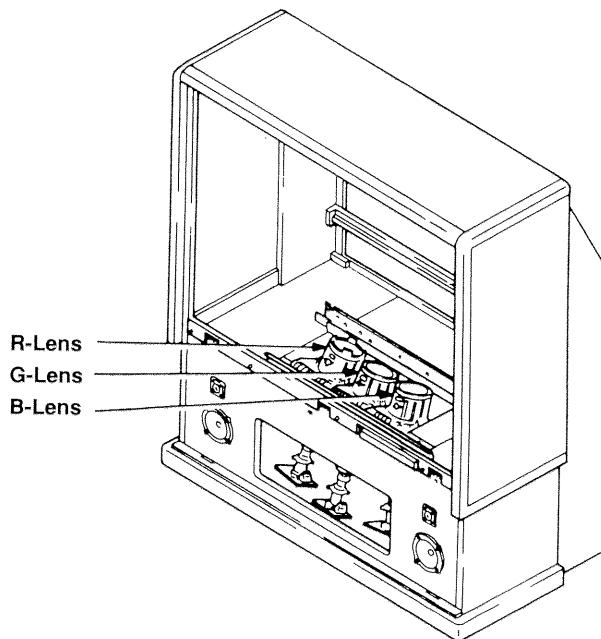

Detailing X-radiation shield.

Fig. 1

2. Read and comply with all caution and safety-related notes on or inside the receiver cabinet, on the receiver chassis, or on the picture tube.
3. **Design Alteration Warning** — Do not alter or add to the mechanical or electrical design of this TV receiver. Design alterations and additions, including but not limited to, circuit modifications and the addition of items such as auxiliary audio and/or video output connectors, might alter the safety characteristics of this receiver and create a hazard to the user. Any design alterations or additions may void the manufacturer's warranty and may make you, the servicer, responsible for personal injury or property damage resulting therefrom.
4. **Picture Tube Implosion Protection Warning** — The picture tube in this receiver employs integral implosion protection. For continued implosion protection, replace the picture tube only with one of the same type number. Do not remove, install, or otherwise handle the picture tube in any manner without first putting on shatterproof goggles equipped with side shields. People not so equipped must be kept safely away while picture tubes are handled. Keep the picture tube away from your body. Do not handle the picture tube by its neck.
5. **Hot Chassis Warning** — **a.** Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord and may be safety serviced without an isolation transformer only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC power source. To confirm that the AC power plug is inserted correctly, with an AC voltmeter measure between the chassis and a known earth ground. If a voltage reading in excess of 1.0V is obtained, remove and reinser the AC power plug in the opposite polarity and again measure the voltage potential between the chassis and a known earth ground. **b.** Some TV receiver chassis normally have 85V AC (RMS) between chassis and earth ground regardless of the AC plug polarity. These chassis can be safely serviced only with an isolation transformer inserted in the power line between the receiver and the AC power source, for both personnel and test equipment protection. **c.** Some TV receiver chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
6. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: **a.** near sharp edges, **b.** near thermally hot parts — be sure that leads and components do not touch thermally hot parts, **c.** the AC supply, **d.** high voltage and **e.** antenna wiring. Always inspect in all areas for pinched, out-of-plate, or frayed wiring. Do not change spacing between components, and between components and the printed circuit board. Check AC power cord for damage.
7. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.
8. **PRODUCT SAFETY NOTICE** — Many TV electrical and mechanical parts have special safety-related characteristics some of which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified Hitachi service data by shading on schematics and by a () in the parts list. Use of a substitute replacement that does not have the same safety characteristics as the recommended replacement part in Hitachi service data parts list might create shock, fire, and/or other hazards. Product safety is under review continuously and new instructions are issued whenever appropriate. For the latest information, always consult the appropriate current Hitachi service literature. A subscription to, or additional copies of Service literature may be obtained at a nominal charge from Hitachi.

## SERVICING PRECAUTIONS

**CAUTION:** Before servicing instruments covered by this service data and its supplements and addenda, read and follow the SAFETY PRECAUTIONS on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

### General Servicing Guidelines

1. Always unplug the instrument AC power cord from the AC power source before:
  - a. Removing or reinstalling any component, circuit board, module, or any other instrument assembly.
  - b. Disconnecting or reconnecting any instrument electrical plug or other electrical connection.
  - c. Connecting a test substitute in parallel with an electrolytic capacitor in the instrument.
- Caution:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
- d. Discharging the picture tube anode.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc.) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc." The H.V. Distribution Box has an internal  $400M\Omega$  resistor (bleeder resistor) connected from the high voltage to ground. After power is removed from the instrument the high voltage will discharge through the high voltage bleeder resistor. If the tubes have high voltage after power is removed, then the bleeder resistor is defective or the bleeder ground is disconnected.
3. Discharge the picture tube's anode at any of the R, G, or B outputs on the High Voltage distribution box only by (a) first connecting one end of an insulated clip lead to the degaussing or kine aquadag grounding system shield at the point where the picture tube socket ground lead is connected, and then (b) touch the other end of the insulated clip lead to the picture tube high voltage distribution box R, G, or B output, using an insulating handle to avoid personal contact with high voltage.
4. Do not spray chemical on or near this instrument or any of its assemblies.
5. Unless specified otherwise in these service data, clean electrical contacts by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable nonabrasive applicator: 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength). **Caution:** This is a flammable mixture. Unless specified otherwise in these service data, lubrication of contacts is not required.
6. Do not defeat any plug/socket B+ voltage interlocks with which instruments covered by this service data might be equipped.

7. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
8. Always connect the test instrument ground lead to the appropriate instrument chassis ground before connecting the test instrument positive lead. Always remove the test instrument ground lead last.
9. Use with this instrument only the test fixtures specified in this service data.

**CAUTION:** Do not connect the test fixture ground strap to any heatsink in this instrument.


### Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
  2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
  3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
  4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
  5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
  6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material.)
  7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
- CAUTION:** Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

## General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range 500°F to 600°F.
2. Use an appropriate gauge of resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a small wire-bristle (0.5 inch or 1.25 cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique.
  - a. Allow the soldering iron tip to reach normal temperature (500°F to 600°F).
  - b. Heat the component lead until the solder melts. Quickly draw away the melted solder with an anti-static, suction-type solder removal device or with solder braid.
- CAUTION:** Work quickly to avoid overheating the circuit board printed foil.
6. Use the following soldering technique.
  - a. Allow the soldering iron tip to reach normal temperature (500°F to 600°F).
  - b. First, hold the soldering iron tip and solder strand against the component lead until the solder melts.
  - c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.
- CAUTION:** Work quickly to avoid overheating the circuit board printed foil or components.
- d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

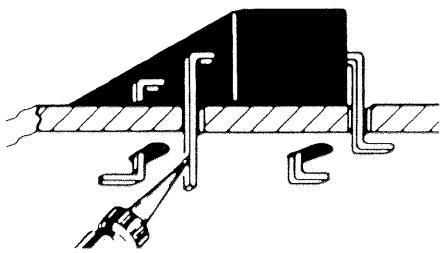

**Use Soldering Iron to Pry Leads**

## IC Removal/Replacement

Some Hitachi unitized chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

### Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

### Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas.)

### "Small-signal" Discrete Transistor Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact, then solder each connection.

### Power Output Transistor Devices Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heatsink mounting screw (if so equipped).
3. Carefully remove the transistor from the circuit board.
4. Insert new transistor in circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heatsink.

### Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicularly to the circuit board.
3. Observing diode polarity, wrap each lead out of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and, if necessary, apply additional solder.

### Fuses and Conventional Resistor Removal/Replacement

1. Clip each fuse or resistor lead at top of circuit board hollow stake.
2. Securely crimp leads of replacement component around stake 1/8 inch from top.
3. Solder the connections.

**CAUTION:** Maintain original spacing between the replaced component and adjacent components and the circuit board, to prevent excessive component temperatures.

### Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board, causing the foil to separate from, or "lift-off," the board. The following guidelines and procedures should be followed whenever this condition is encountered.


#### In Critical Copper Pattern Areas

High component/copper pattern density and/or special voltage/current characteristics make the spacing and integrity of copper pattern in some circuit board areas more critical than in others. The circuit foil in these areas is designated as Critical Copper Pattern and is identified and illustrated in this service data in the section titled Safety Related Copper Pattern (see data in the section titled Safety Related Copper Pattern (see table of contents for page number). Because Critical Copper Pattern requires special soldering techniques to ensure the maintenance of reliability and safety standards, contact your Hitachi personnel.

#### At IC Connections

To repair defective copper pattern at IC connections, use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections.)

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary.)
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.

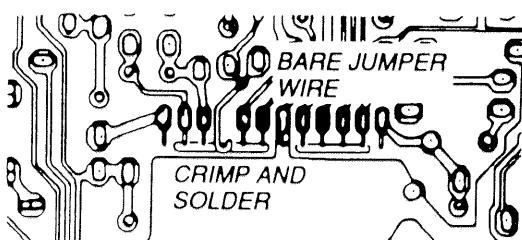


Install Jumper Wire and Solder

3. Bend a small "U" in one end of a small-gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.

4. Route the jumper wire along the path of the cut-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapping area, and clip off any excess jumper wire.

#### At Other connections

Use the following technique to repair defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

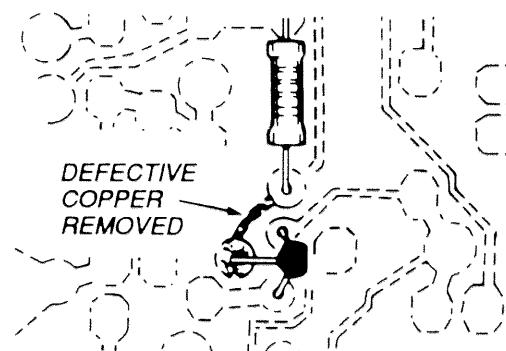

Insulated Jumper wire

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side. Carefully crimp and solder the connections.

**CAUTION:** Be sure the insulated jumper wire is dressed so that it does not touch components or sharp edges.

### Frequency Synthesis (FS) Tuning Systems



1. Always unplug the instrument AC power cord before disconnecting or reconnecting FS tuning system cables and before removing or inserting FS tuning system modules.
2. The FS tuner must never be disconnected from the FS tuning control module while power is applied to the instrument.
3. When troubleshooting intermittent problems that might be caused by defective cable connection(s) to the FS tuning system, remove the instrument AC power as soon as the defective connector is found and finish confirming the bad connection with a continuity test. This procedure will reduce the probability of electrical overstress of the FS system semi-conductor components.

## TECHNICAL CAUTIONS

### High Voltage limiter circuit operation check.

1. Turn off TV and connect jig as shown in Figure 2. Adjust jig fully counter-clockwise for minimum resistance.
2. Set the AC input to 120V AC and turn on TV.
3. Confirm test pattern on CRT is a usable picture, then slowly adjust jig until the picture disappears and TV shuts down.

4. When the limiter circuit is operating properly, High Voltage will be less than 35.5kV at 0.6mA when TV shuts down.
5. Turn off set immediately after checking circuit operation.
6. Unplug set for one minute to reset shutdown circuit. Remove jig and voltmeter.

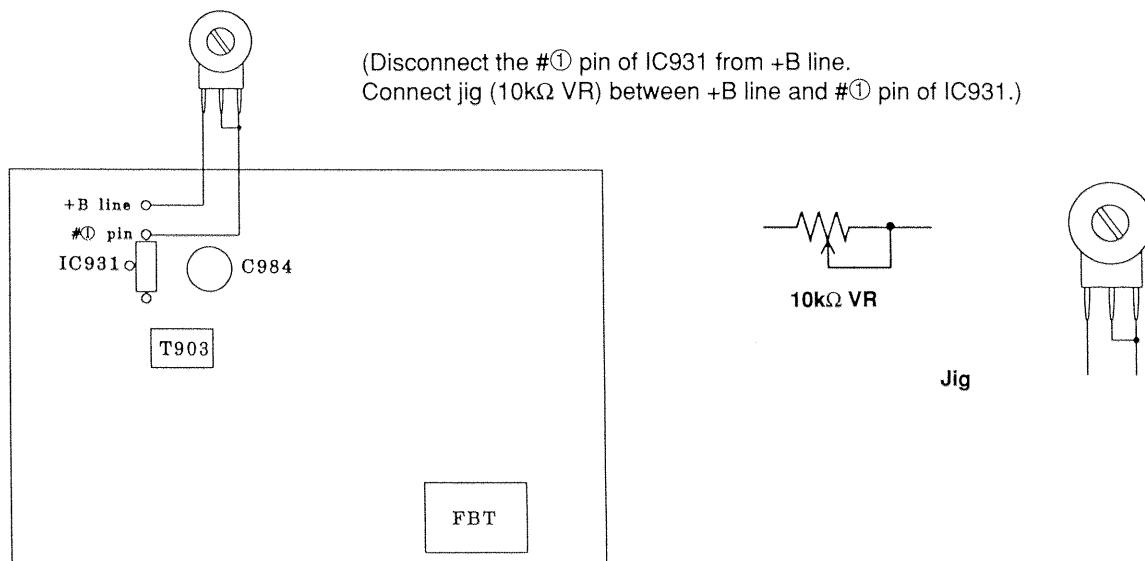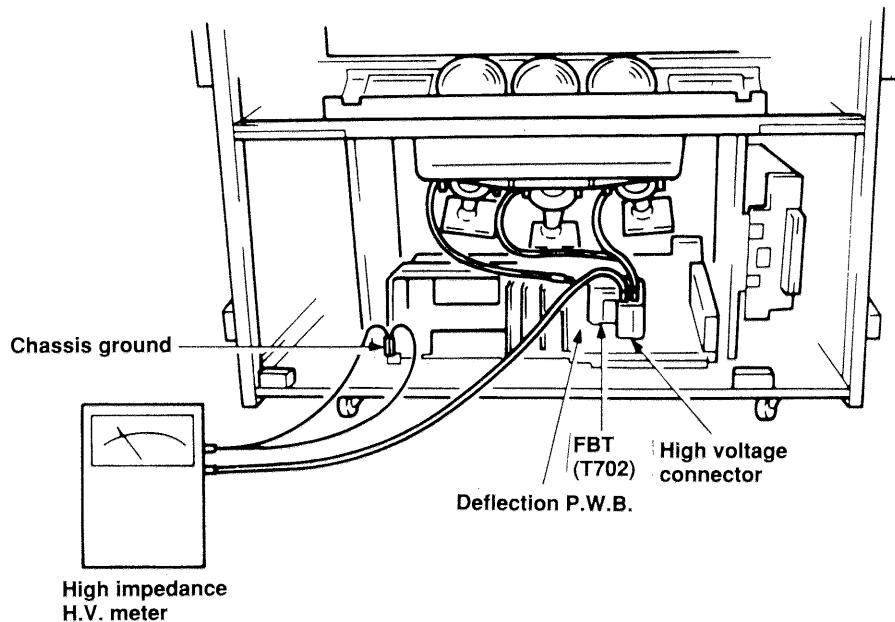

Deflection/Power Supply P.C.B.  
Fig. 2


## SPECIFICATIONS

<b>Model:</b>	50SX5P – AP33B Chassis 60SX3B, 60SX4K – AP34 Chassis	<b>Anode Voltage:</b>	30.0 kV (AP33B) 33.6 kV (AP34) (Zero Beam Current)	
<b>Cathode-Ray Tube:</b>	80° deflection 7 inch - AP33B 180CZB22(K)R/180CZB22(K)G/ 180CZB22(K)B 80° deflection 7 inch - AP34 180CGB22(F)R/180CGB22(F)G/ 180CGB22(F)B	<b>Brightness:</b>	320 ft-L Nominal - 60" 420 ft-L Nominal - 50" (Peak White)	
<b>Power Input:</b>	120 volts AC, 60Hz	<b>Speakers:</b>	2 Woofers - 6 inch (16 cm) round 2 Tweeters - 2 inch (5 cm) round	
<b>Power Consumption:</b>	250 watts - Maximum - AP34 240 watts - Maximum - AP33B 167 watts - Operating - AP34 161 watts - Operating - AP33B	<b>Dimension:</b>	<b>50SX5P</b> Height (in.) Width (in.) Depth (in.) Weight (lbs.)	<b>60SX3B/4K</b> 61 1/4 51 1/2 28 5/8 363
<b>Antenna Impedance:</b>	75 ohm Unbalanced VHF/UHF/CATV	<b>Circuit Board Assemblies:</b>	CPT (B) P.C.B. CPT (G) P.C.B. CPT (R) P.C.B. Signal P.C.B. Deflection/Power Supply P.C.B. SP Terminal P.C.B. Control P.C.B. Surround P.C.B. MTS P.C.B. P-in-P Sub P.C.B. Terminal P.C.B. Super Contrast P.C.B. Dual Focus P.C.B. (AP34)	
<b>Receiving Channel:</b>	CH VHF 2-13 EXT. Mid (A-2)-(A-1),4+ CATV Mid A-I CATV Super J-W CATV Hyper (W+29)-(W+53)			
<b>Intermediate Frequency:</b>	Picture I-F Carrier 45.75 MHz Sound I-F Carrier 41.25 MHz Color Sub Carrier 42.17 MHz			
<b>Video Input:</b>	1 Voltp-p 75 ohm			
<b>Video Output:</b>	1 Voltp-p 75 ohm			
<b>Audio Input:</b>	0.4 volt rms, 40 k ohm			
<b>Stereo Audio Output:</b>	0.4 volt rms, 1 k ohm			
<b>Audio Output Power:</b>	Front — 12 watts rms per channel, 8 ohm impedance. Rear — 5 watts per channel, 8 ohm impedance.			


## CIRCUIT PROTECTION

Fuse (or Device)	Circuit Protected	Physical Location
F601 1.6A/125V DC	Vertical	Power/Defl. Circuit Board
F901 5A/125V AC	Main Fuse	Power/Defl. Circuit Board
F903 5A/125V DC	Main Fuse	Power/Defl. Circuit Board
F931 3A/125V DC (MINIFUSE)	Rear Audio Output	Power/Defl. Circuit Board
F932 4A/125V DC	Vertical	Power/Defl. Circuit Board
F933 3A/125V DC (MINIFUSE)	Convergence	Power/Defl. Circuit Board
F934 3A/125V DC (MINIFUSE)	12V Supply	Power/Defl. Circuit Board
F935 4A/125V DC	11V Supply	Power/Defl. Circuit Board
F936 3A/125V DC (MINIFUSE)	Front Audio Output	Power/Defl. Circuit Board
F937 1.6A/125V DC	130V (+B) Supply	Power/Defl. Circuit Board

## GENERAL INFORMATION

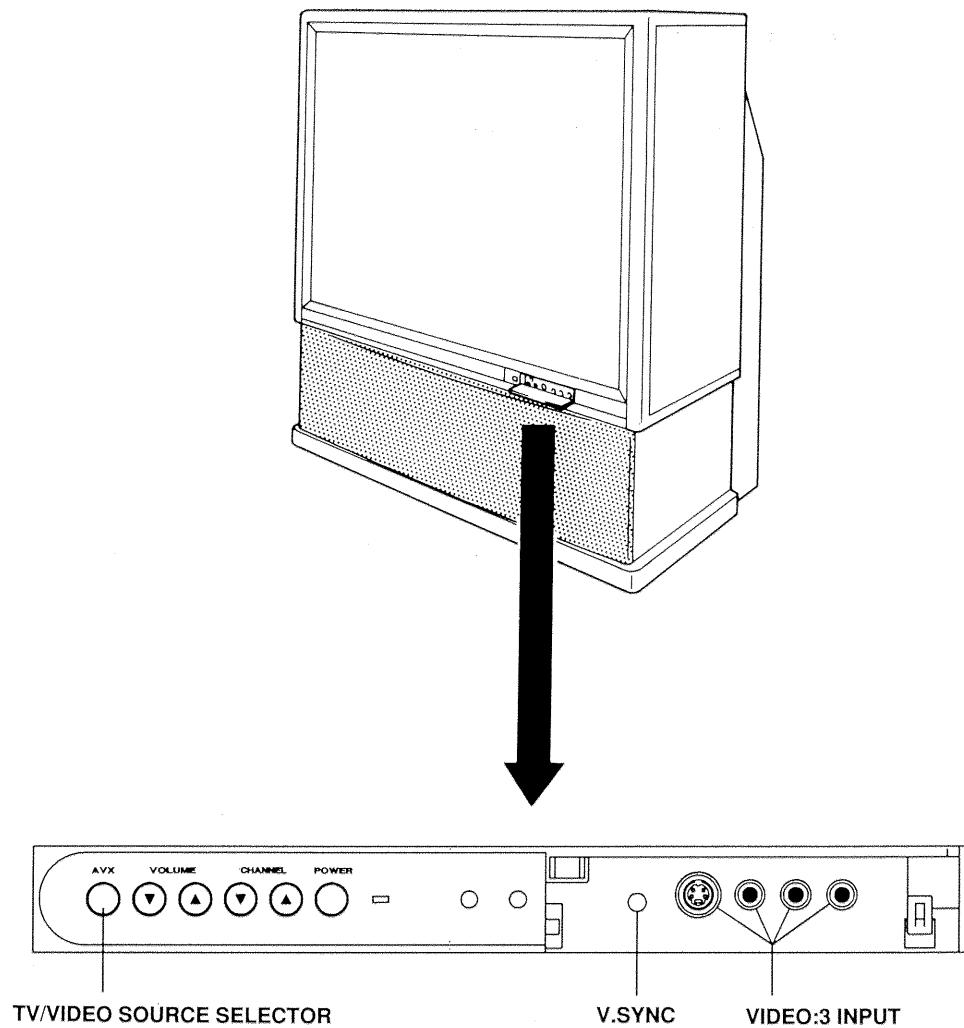


Control Panel  
Fig. 3

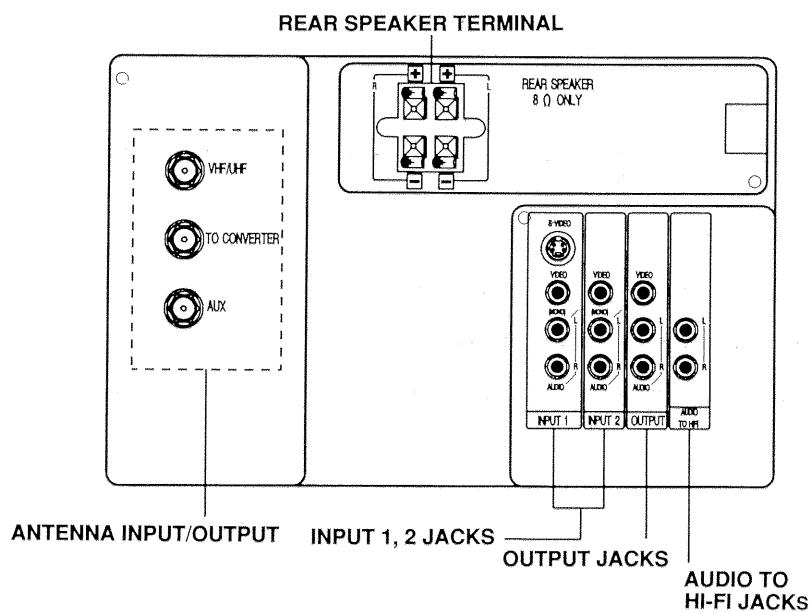

Rear Connections Panel  
Fig. 4

## ADJUSTING FOR PICTURE AND SOUND FUNCTIONS

Press MENU, 2 ENTER on the remote control to display the -PICTURE- functions.



PICTURE PROGRAM is for preferred settings — contrast, color, etc.


PICTURE SETTING is used to improve the picture quality.

CONVERGENCE ADJ. is used to align the TV color picture tubes (red, green, blue) to produce a clear picture.

### • PICTURE PROGRAM

There are two sets of preferred settings, PREFERENCE-A, PREFERENCE-B or use the factory PRESET settings.


Press MENU, 2, ENTER, 1, ENTER to select the PICTURE PROGRAM.

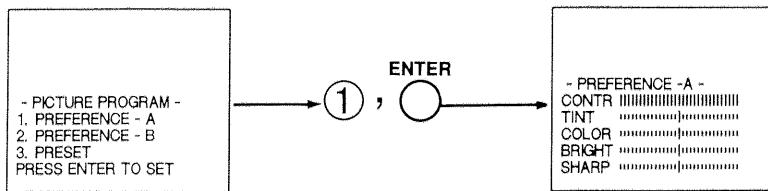

Press the CURSOR buttons to select and make adjustments.

- |            |  |
|------------|--|
| CONTRAST   | — Use this function to change the contrast between black and white levels in the picture. This adjustment will only affect the picture when the PICTURE SETTING A1 is OFF. |
| TINT       | — Use this function to adjust flesh tones so that they appear natural.   |
| COLOR      | — Use this function to adjust the level of color in the picture.   |
| BRIGHTNESS | — Use this function to adjust overall picture brightness.  |
| SHARPNESS  | — Use this function to adjust the amount of fine detail in the picture. This adjustment will only affect the picture when PICTURE SETTING A1 is OFF.                       |

Press MENU, 3 ENTER on the remote control to display the -SOUND- functions.



SOUND PROGRAM is for preferred settings — balance, bass and treble.


SOUND SETTING is used to improve the sound quality.

SURROUND is used for special sound effects.

#### • SOUND PROGRAM

There are two sets of preferred settings, PREFERENCE-A, PREFERENCE-B or use the factory PRESET settings.

Press MENU, 3, ENTER, 1, ENTER to select the SOUND PROGRAM.

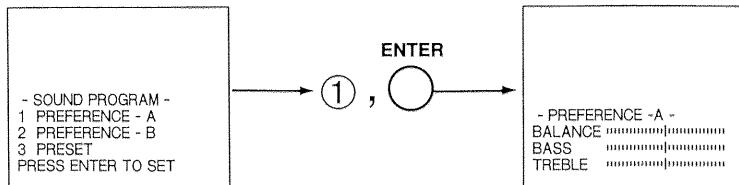

Press the CURSOR buttons to select and make adjustments.

BALANCE — This function will control the left, right balance of the TV internal speakers, the AUDIO TO HI-FI output and the surround speakers. The balance control is also found in the DOLBY TEST function.

BASS — This function controls the low frequency audio to all speakers.

TREBLE — This function controls the high frequency to all speakers.

## SELF CHECK REPAIR CODES


Press the AVX and POWER buttons on the control panel at the same time.

CODE	DETECTION CONTENTS	DETECTION TIME	REMARK
40	Abnormal horizontal deflection	---	---
41	Flyback Transformer loading on 12V line	---	---
50	Power Relay off	---	Abnormal condition causing relay to turn off
10	Check for PLL lock	Not locked in 2 sec.	During selection time
11	Check for AFC operation	Not finished in 2 sec.	During selection time
60	Check for AC input	At uP reset time	AC input (50/60Hz) not detected at reset time
31	Check IC0001 operation	At uP reset time	Check for out of range operation

**Note:** Code 10 or 11 may appear if TV is turned on without an antenna source connected.

## CONVERGENCE ADJUSTMENT

Press MENU, 2, ENTER, 3, ENTER on the remote control to display the CONVERGENCE ADJUSTMENT.

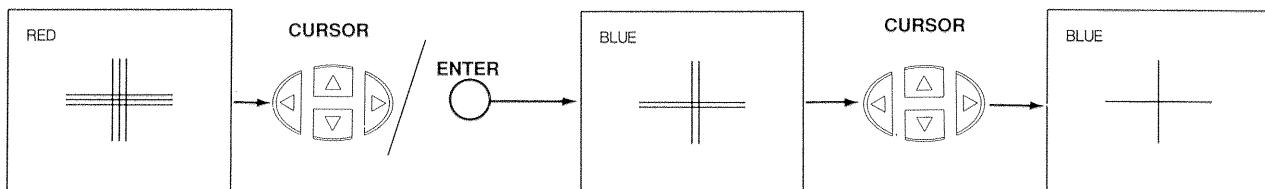

Press the CURSOR ▲, ▼ to move the color displayed up or down.

Press the CURSOR ◀, ▶ to move the color displayed left or right.

Press ENTER to change the color.

Press MENU to exit.

## DIGITAL CONVERGENCE ADJUSTMENT

The digital convergence adjustment is done using the CLU-950GR remote control but is not the remote control used by the customer for the models 60SX3B/4K and 50SX5P. A Hitachi remote control with "PICTURE" and "SOUND" codes identical to the CLU-950GR can be used in combination with the customer's remote (CLU-850GR) to perform the digital convergence adjustment.

Remove the speaker grill by pulling forward. Remove the access plate. When repairing or replacing a Projection Tube, Deflection Yoke, or the Power/Deflection PWB, refer to section **ADJUSTMENT WHEN REPLACING PARTS**.

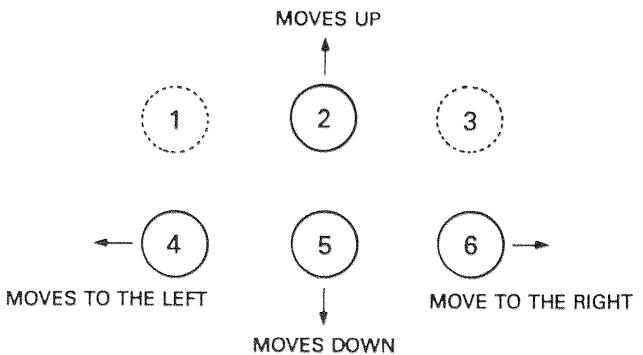


Fig. 2

### ADJUSTMENT WITH NO PARTS REPLACED

1. Receive an RF or video signal.
2. Short the 2-pin DT connector located on the front left edge of the power/deflection pwb. The convergence pattern will be displayed as shown below.

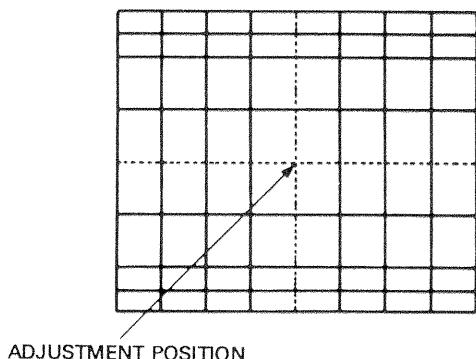


Fig. 1

5. Perform the convergence adjustment using the remote control. Start adjustment at the center of the screen, and continue with the next closest positions, ending with the edge sections.

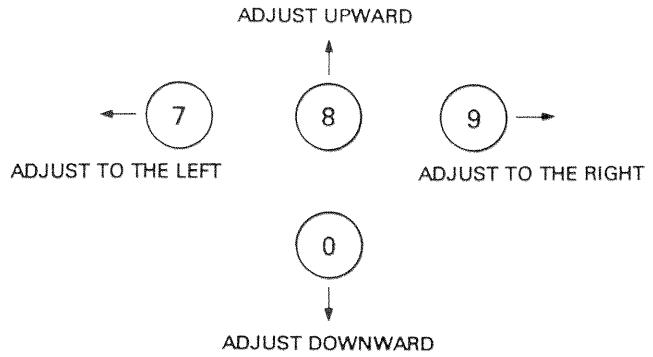


Fig. 3

3. Select the color to be adjusted using the remote control keys. The selected color and adjustment (cursor) position will be displayed as a broken horizontal and vertical line.

"100"	- Green
"LST-CH"	- Red
"AVX"	- Blue

4. Move the cursor (broken lines) using the remote control.

6. When adjustment is complete, press the PICTURE button to perform the interpolation operation. This calculation will take about 15 seconds and no picture will be displayed during this time.

7. After the interpolation operation is completed, check the convergence again and readjust if necessary. When the convergence is acceptable, write the convergence data into the ROM using the SHIFT button. Press once to display magenta dots (alarm display to verify this is the function you wish to execute). Press the SHIFT button a second time to execute the ROM WRITE to memory function. This function will take about 20 seconds and no picture will be displayed at this time. When writing is complete, green dots will be displayed.
8. Press the AVX button to return to the convergence pattern. Remove short circuit across the DT connector and the convergence adjustment is completed.

#### ADJUSTMENT WHEN REPLACING PARTS

1. Note the center of the video signal center for later use in step 15. Place the 50" or 60" convergence jig screen on the set.
2. Set the RED and BLUE static convergence to the center of the range by selecting the CONVERGENCE ADJ. from the PICTURE menu, (see p. 14).
3. Short the 2-pin connector located on the front left edge of the power/deflection pwb to display the digital convergence pattern.

#### Clear Data on RAM

4. To clear the RAM data in the digital convergence module press the PINP button on the remote once to display green and blue dots (alarm display to verify selection). Press PINP a second time to clear memory.

#### Size and Position Adjustment

5. Place the set facing east or west.
6. Start the adjustment 20 minutes or more after the power switch is turned on.
7. Set controls to the preset settings.
8. Verify lens focus, electrical focus, raster tilt, and beam alignment have been adjusted.
9. Short the TS connector on the Red and Blue CPT pwb to display only green.
10. Adjust vertical size VR R662 so that the size is  $820\text{mm} \pm 5\text{mm}$  for models 60SX3B/4K ( $680\text{mm} \pm 5\text{mm}$  for 50SX5P)

$$\ell = 820 \pm 5 \quad (680 \pm 5)$$

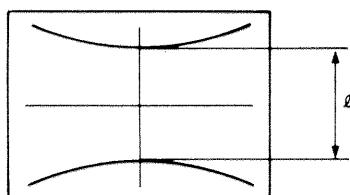


Fig. 4

11. Adjust horiz. size (VR R635) so that the size from the second vertical line on the left and right side is  $950\text{mm} \pm 5\text{mm}$  for models 60SX3B/4K ( $830\text{mm} \pm 5\text{mm}$  for 50SX5P).

$$\ell = 950 \pm 5 \quad (830 \pm 5)$$

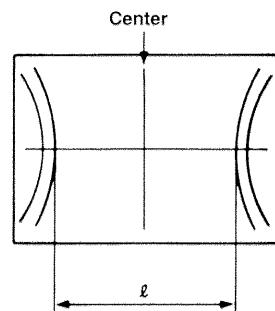


Fig. 5

12. Turn the centering magnets for Red and Blue to satisfy the diagram below (remove short across the TS connectors).

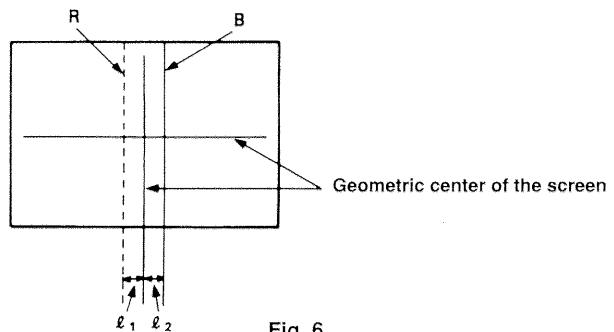


Fig. 6

RED:  $\ell_1 = 30\text{mm}$  ( $19\text{mm}$ ) to the left of the geometric center.  
BLUE:  $\ell_2 = 35\text{mm}$  ( $35\text{mm}$ ) to the right of the geometric center.

Dimensions are for 60" (50") screen.

#### Reading Data from ROM

13. To restore convergence data that is stored in ROM, press the EXCHNG button on the remote to display yellow dots (alarm display to verify selection). Press the EXCHNG button again to read data from ROM. (There will be no picture displayed for about 20 seconds.)

## Phase Adjustment

14. Press the SOUND button on the remote to select the phase adjustment. Use the 7, 9, 8 and 0 buttons to adjust the internal cross-hatch phase as shown in Fig. 7 below.

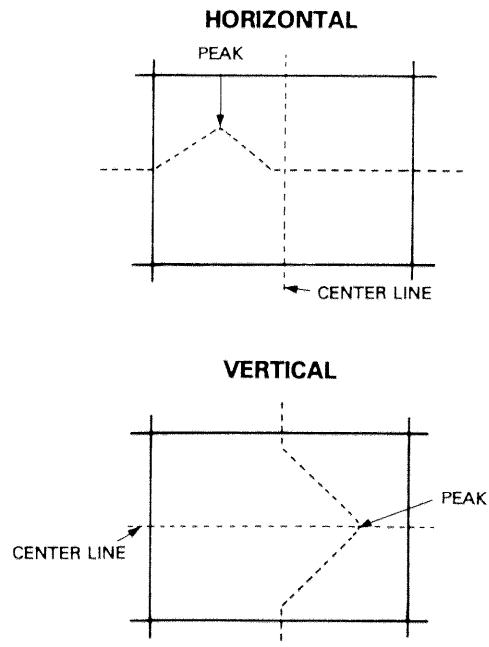


Fig. 7

15. Adjust the phase of the internal cross-hatch so that the center (dotted lines) matches the center of the external signal using the 4, 6, 2 and 5 buttons on the remote.
16. Press the SOUND button again to verify centering and to change to convergence adjustment mode.

## Convergence Adjustment

17. Select the color to be adjusted (refer to step 3 of **ADJUSTMENT WITH NO PARTS REPLACED**).
18. Press FREEZE on the remote and use the 7, 9, 8 and 0 buttons to adjust raster position. Extra horizontal cross-hatch lines will appear. Note: Other functions cannot be accessed when in the raster position adjustment mode. Press the FREEZE button again to return to the convergence adjustment mode.
19. The convergence adjustment is now identical to steps 3 through 8, **ADJUSTMENT WITH NO PARTS REPLACED**. Follow steps 3 through 8 to complete the convergence adjustment.

## JIG SCREEN SPECIFICATION

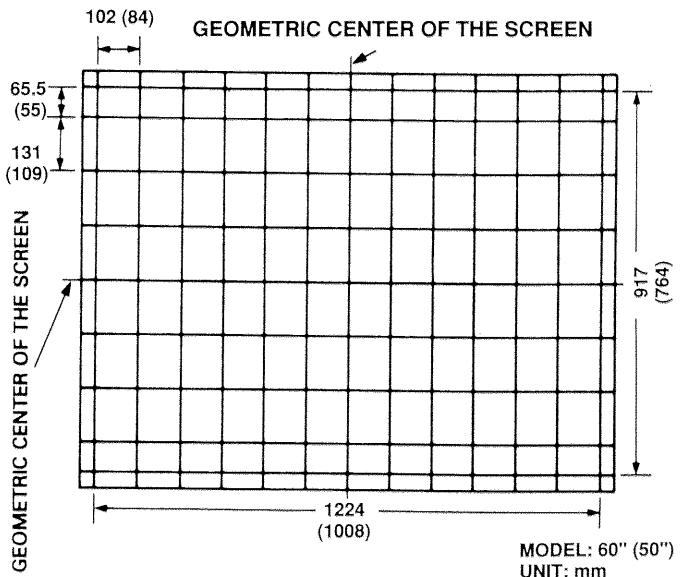


Fig. 8

## DIGITAL CONVERGENCE ADJUSTMENT REMOTE CONTROL FUNCTIONS (CLU-950GR P/N 2573416)

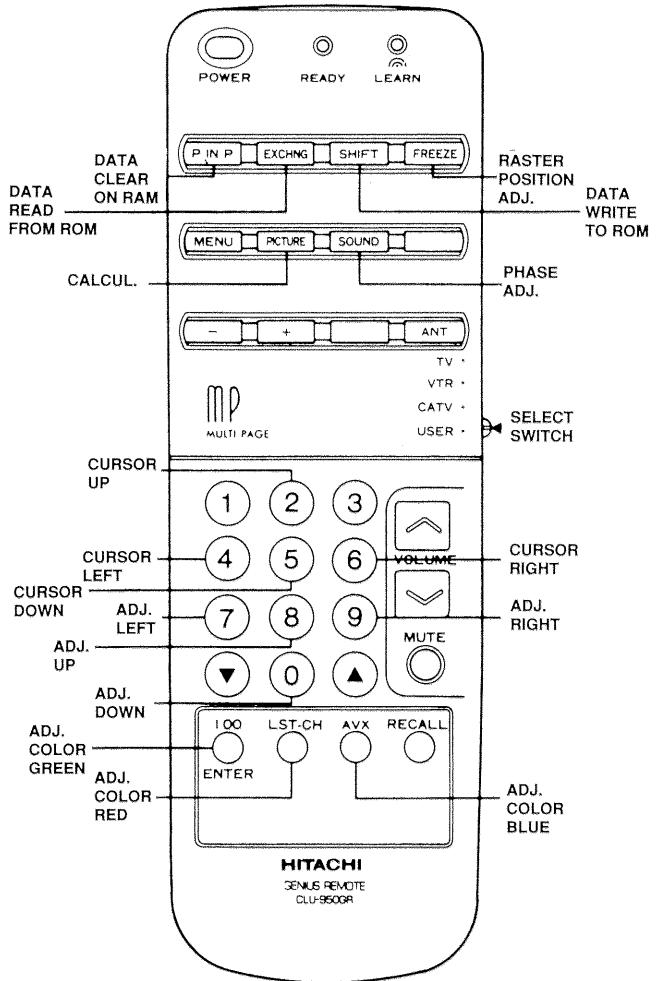


Fig. 9

## CAUTIONS WHEN CONNECTING/DISCONNECTING THE HV CONNECTOR

Perform the following when the HV connector (anode connector) is removed or inserted for CPT replacement, etc.

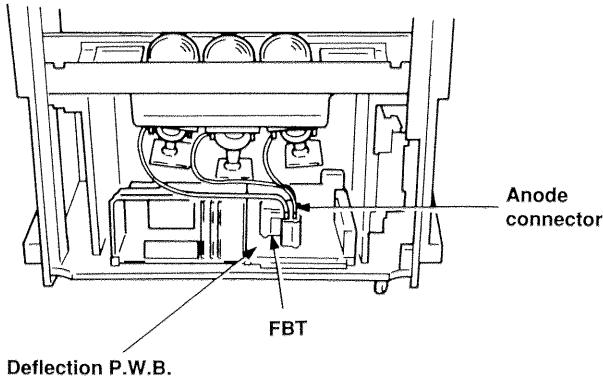


Fig. 5

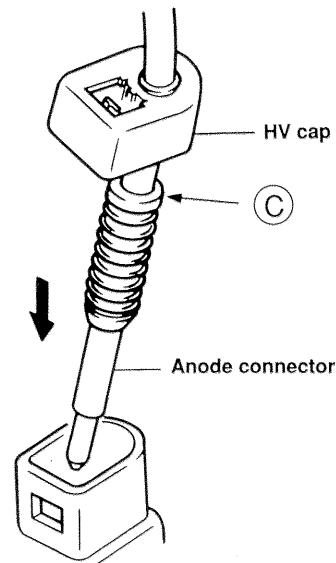


Fig. 7

### During Removal

1. Insert a small flat-bladed screwdriver (adjustment screwdriver: 5-7 mm wide and 0.2-0.3 mm thick) into section (A) in Fig. 6 and then push it in the direction of arrow (B). The lock will release with a click. (The state in Fig. 8 (1) will change to that in Fig. 8 (2).)


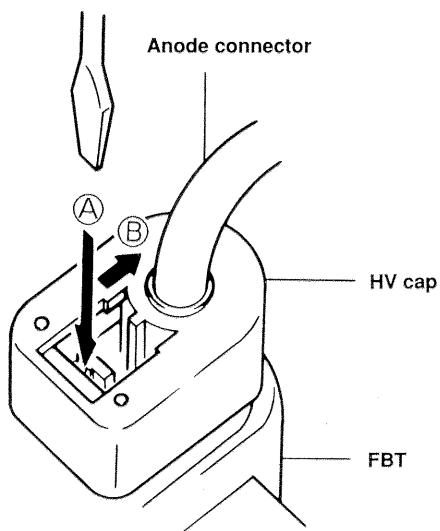


Fig. 6


2. Remove the HV cap and remove the anode connector (Fig. 7).

### During Insertion

1. Insert the anode connector deep into the FBT (to section (C) in Fig. 7) and then push the HV cap into the FBT until it clicks.
2. Make sure the connector is securely inserted. (Check that the claw is at the mark on the HV cap shown as in Fig. 8 (1).)

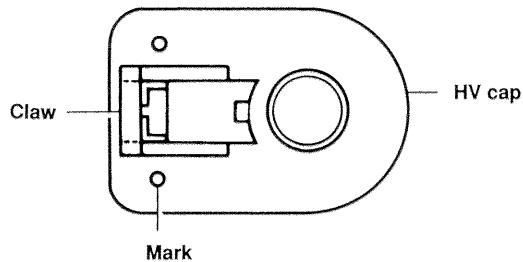


- (1) Lock on  
(When connector is inserted)

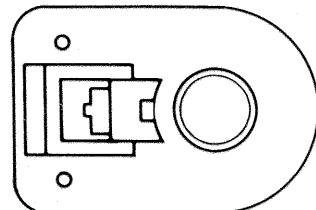


- (2) Release  
(When connector is removed)

Fig. 8


# AP34 BLOCK DIAGRAM

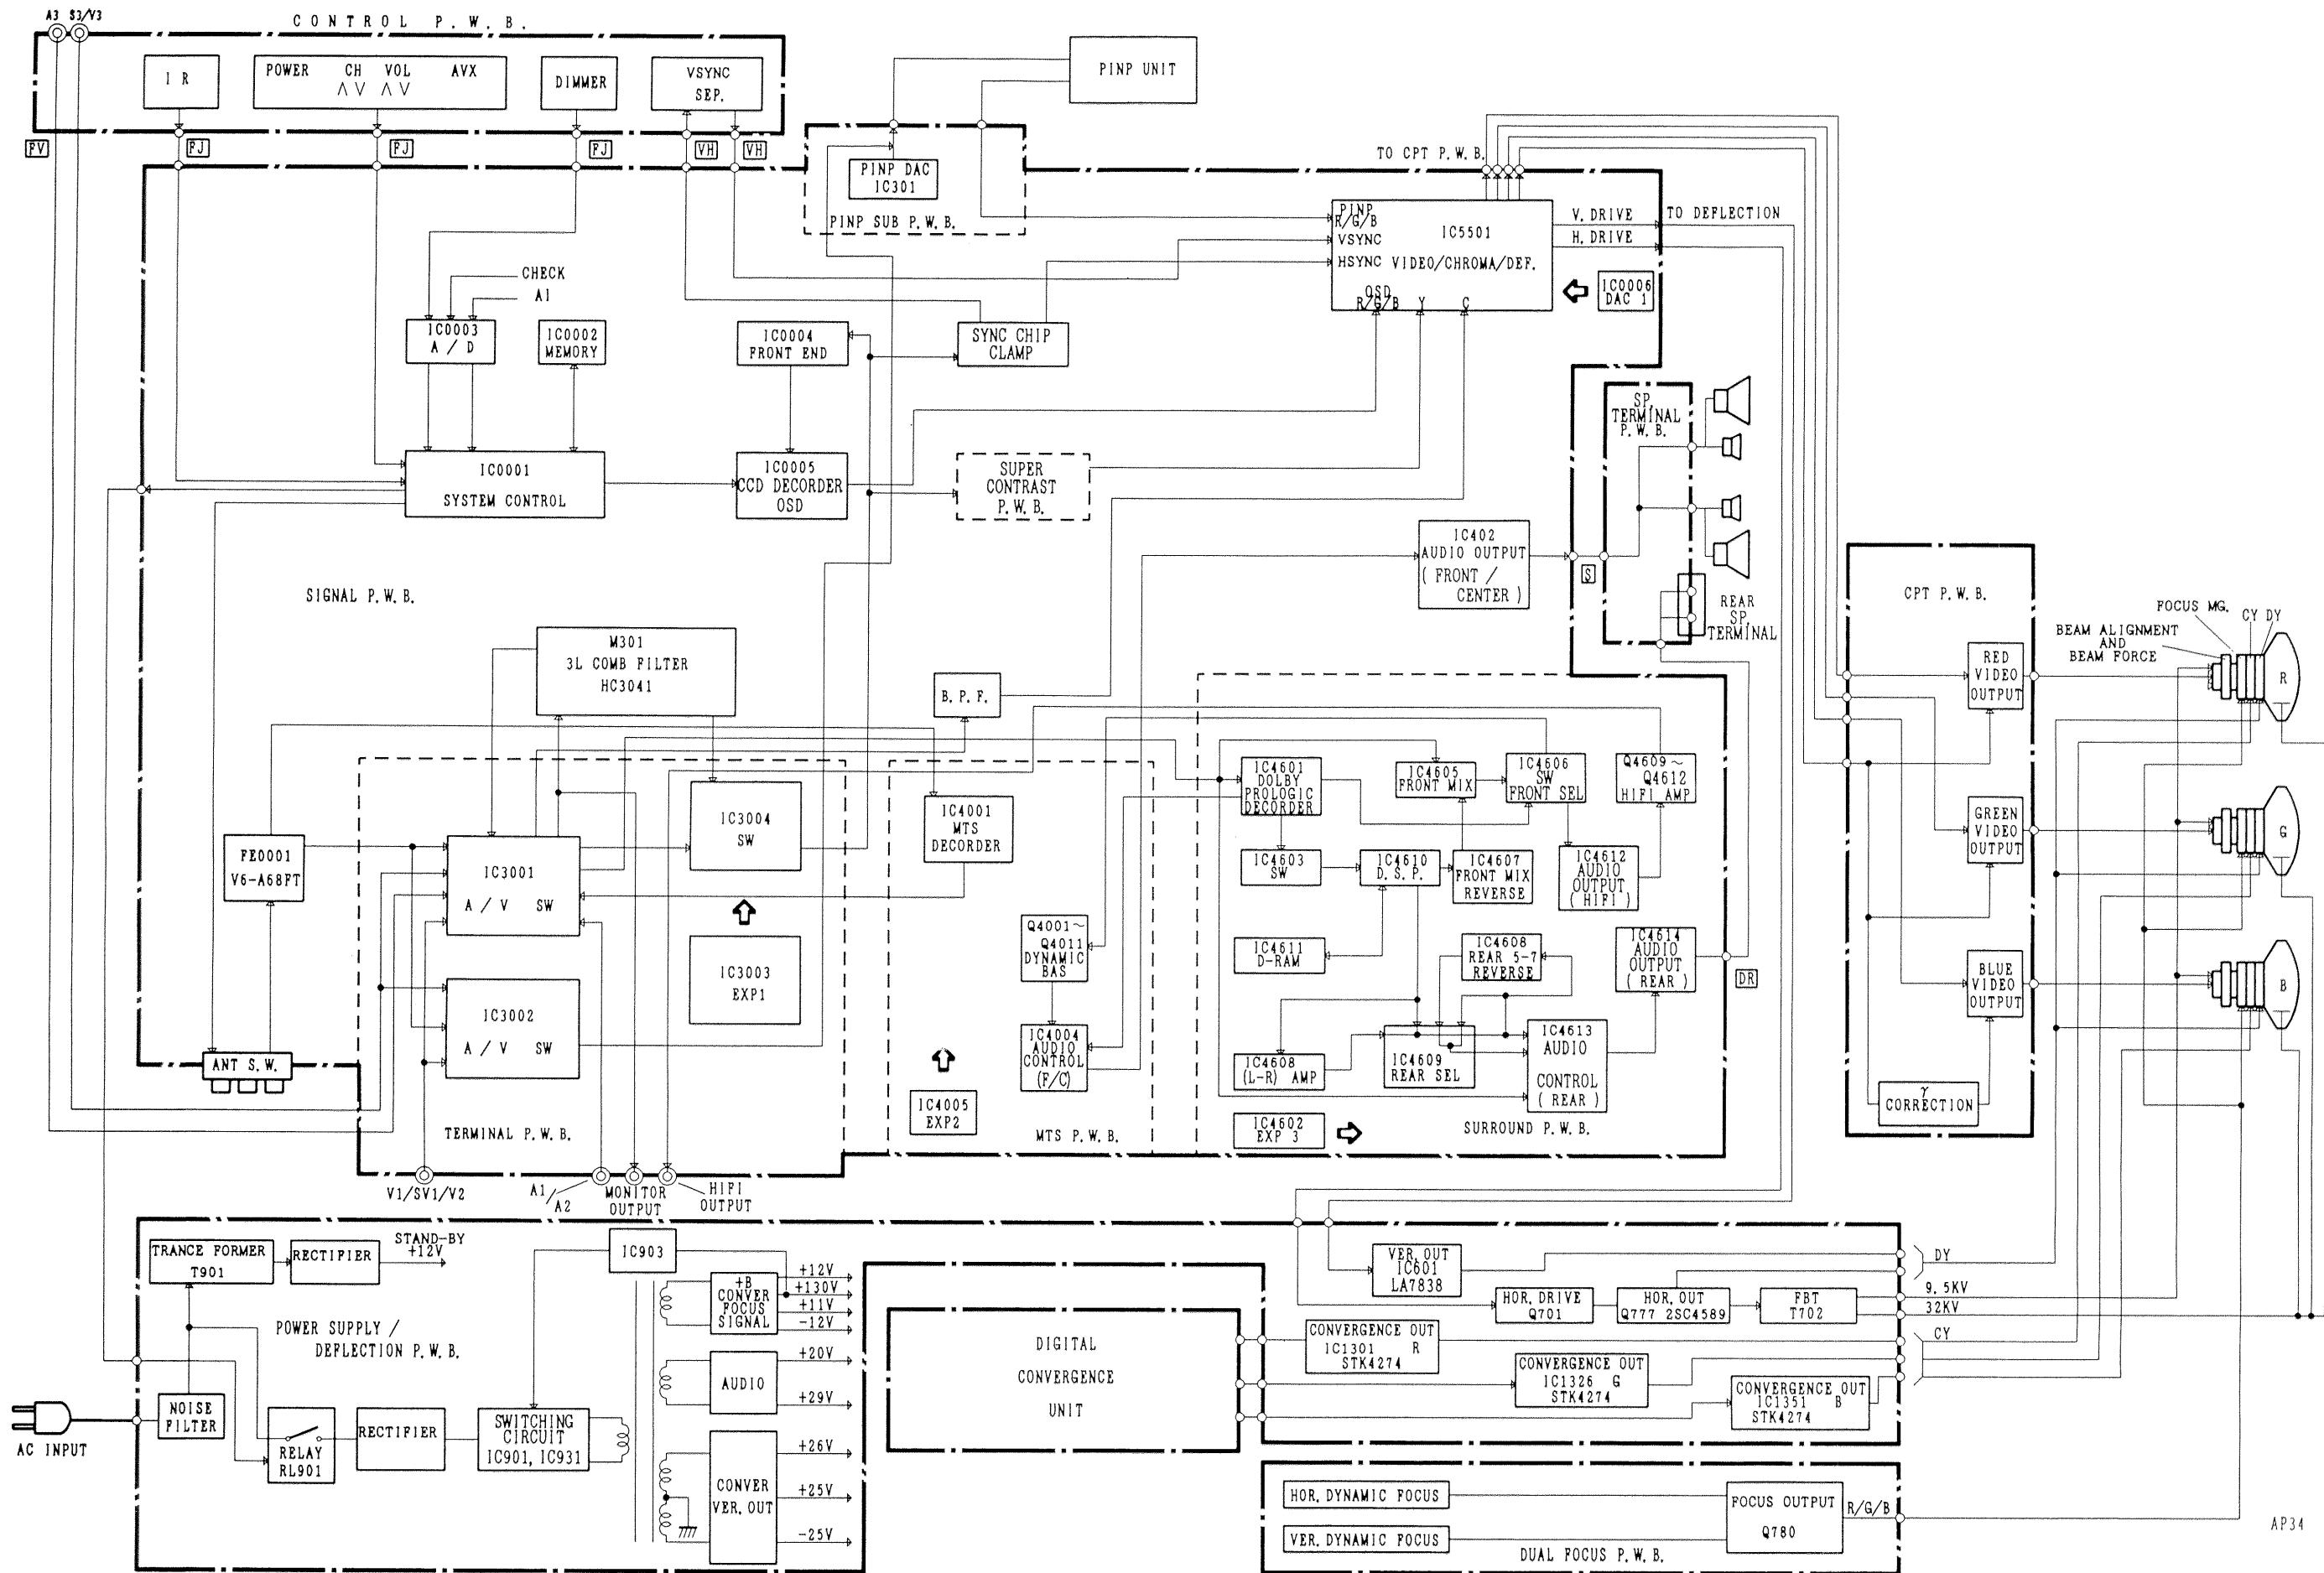


# AP33B BLOCK DIAGRAM

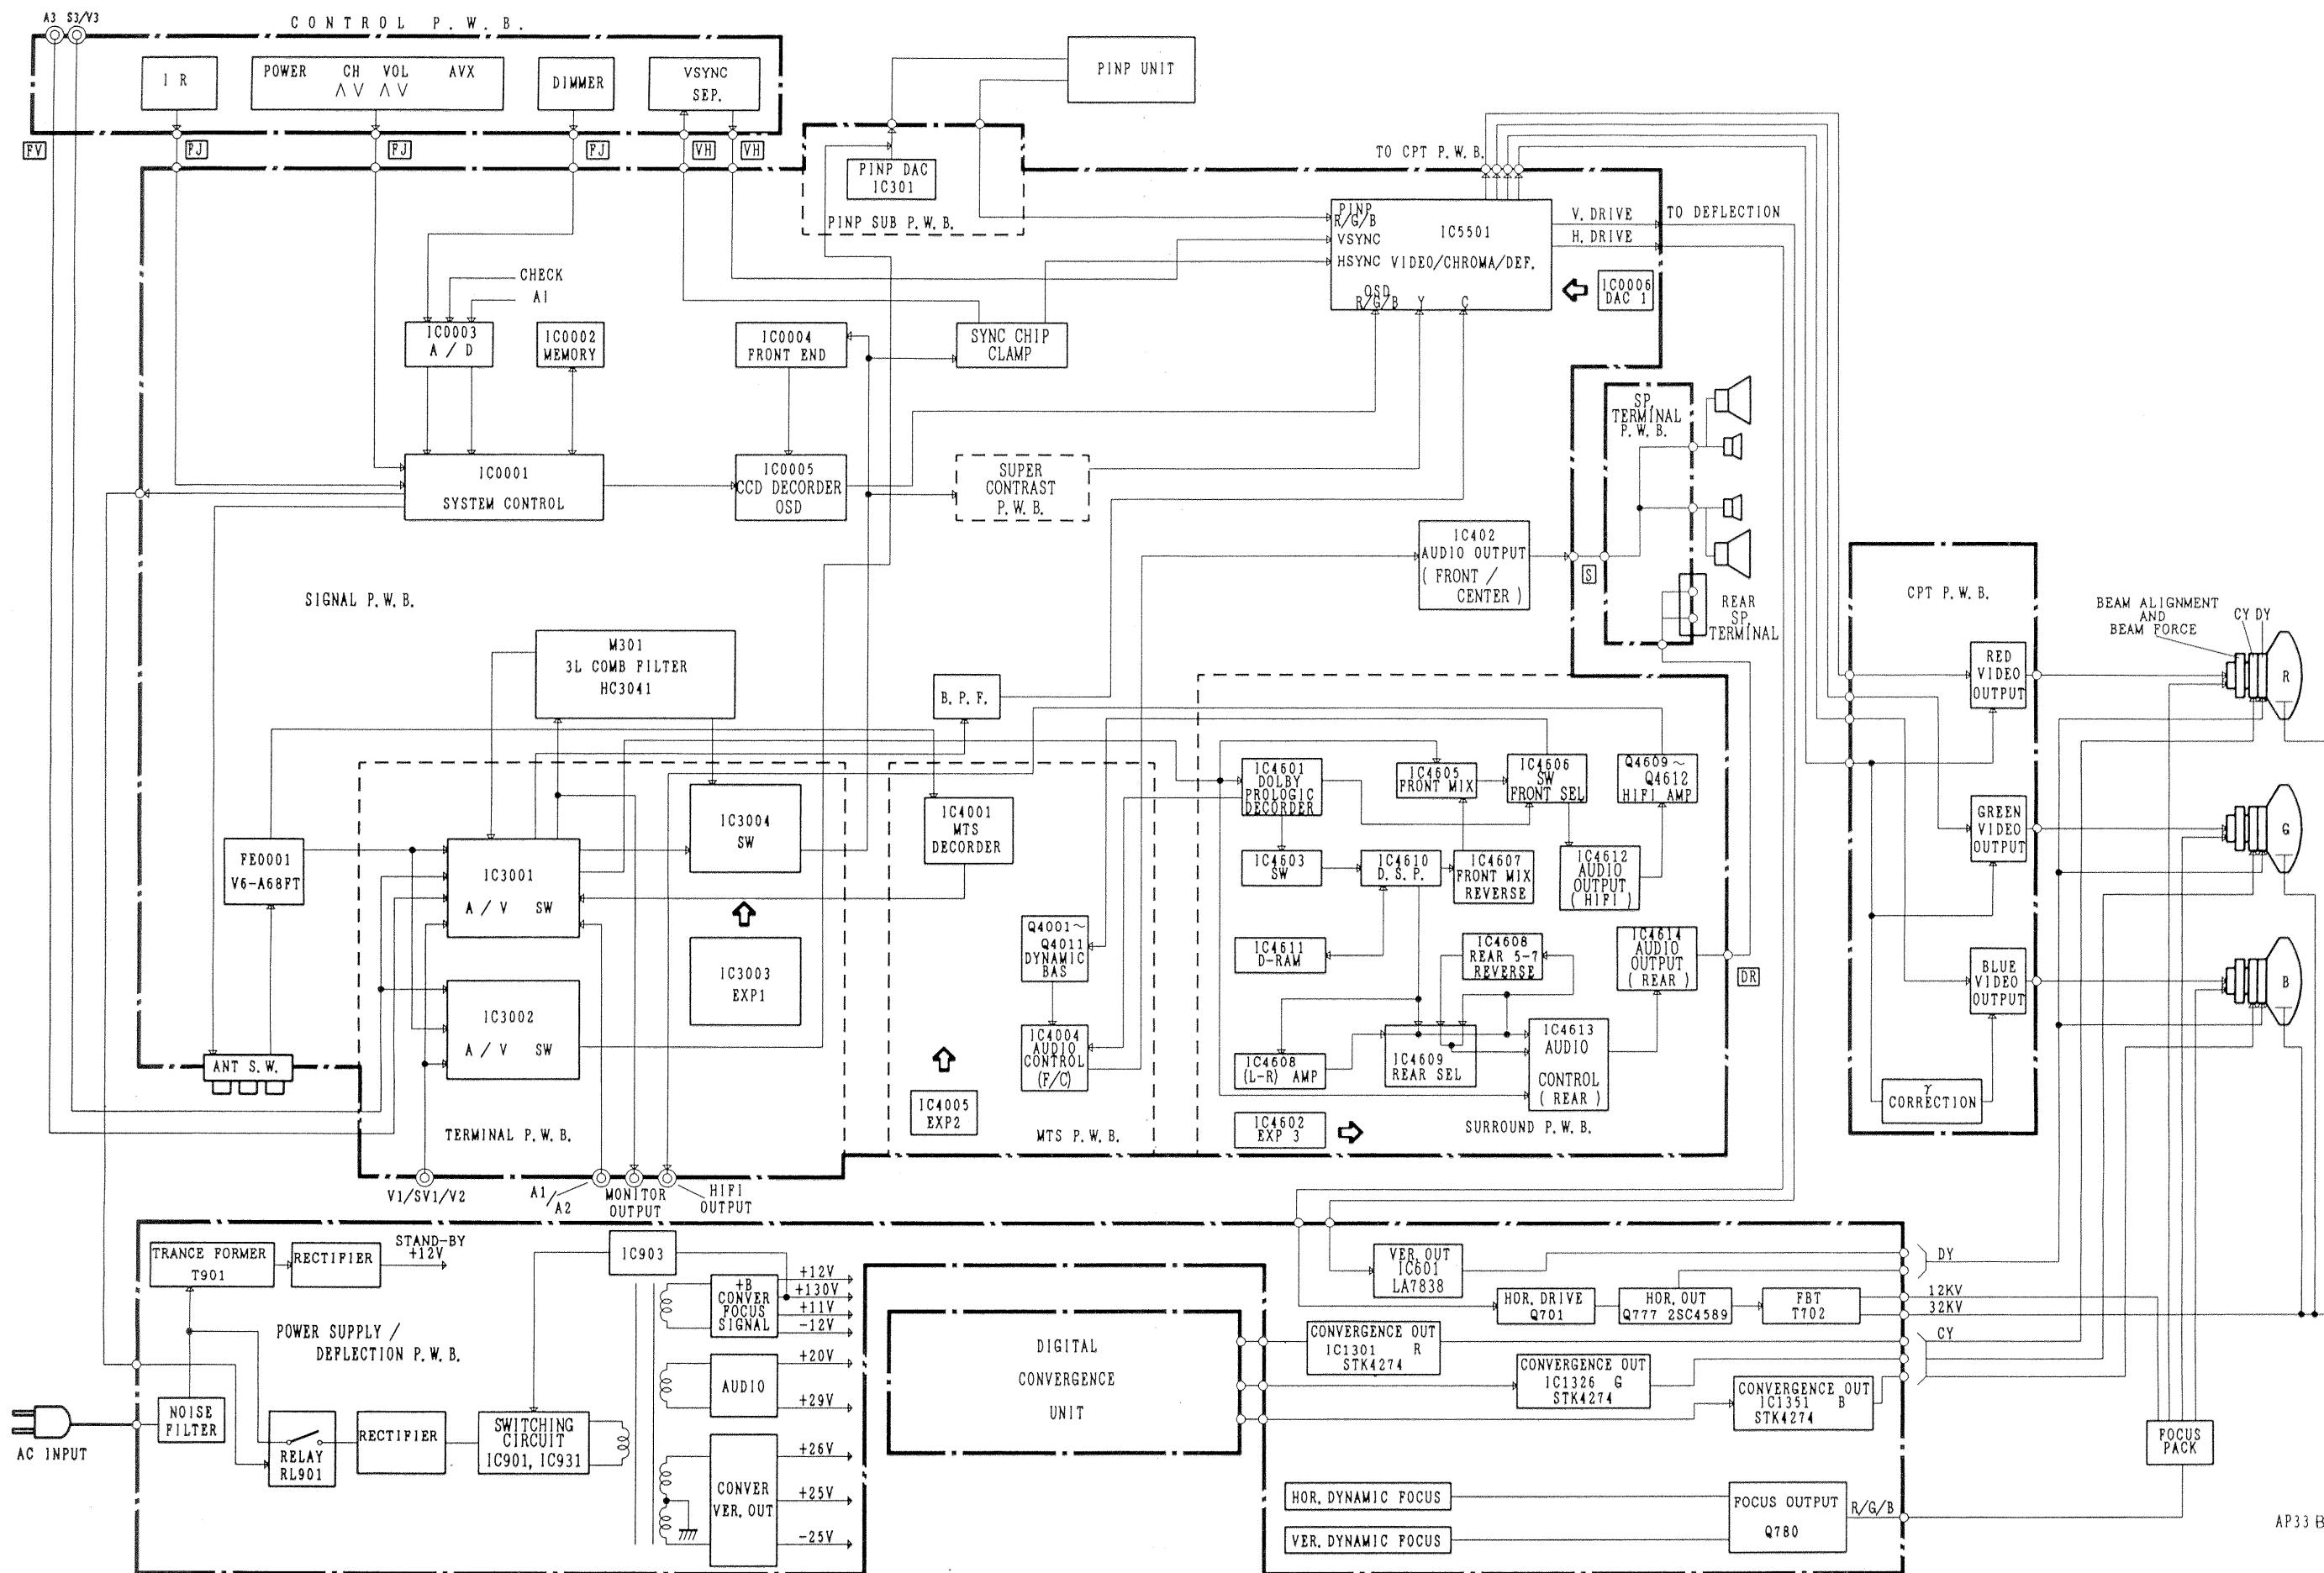

# PROTECTION CIRCUIT BLOCK DIAGRAM

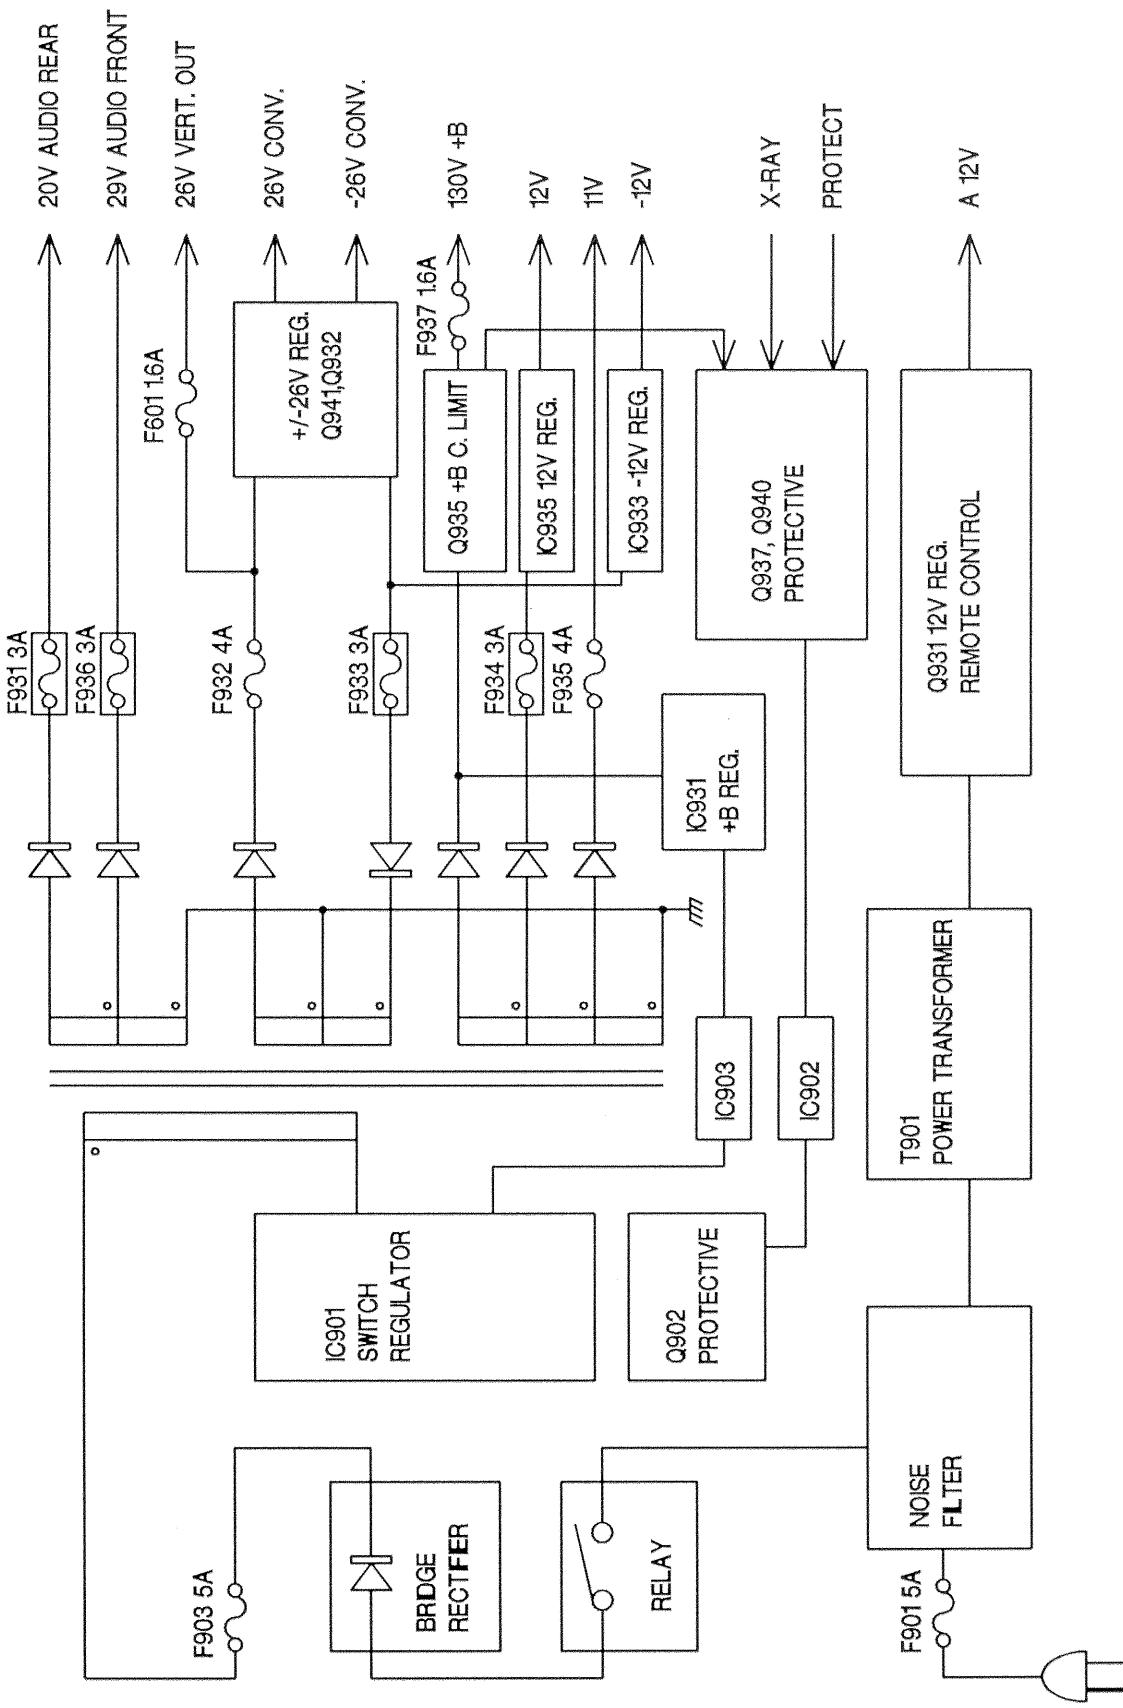


## BASIC CIRCUIT DIAGRAM

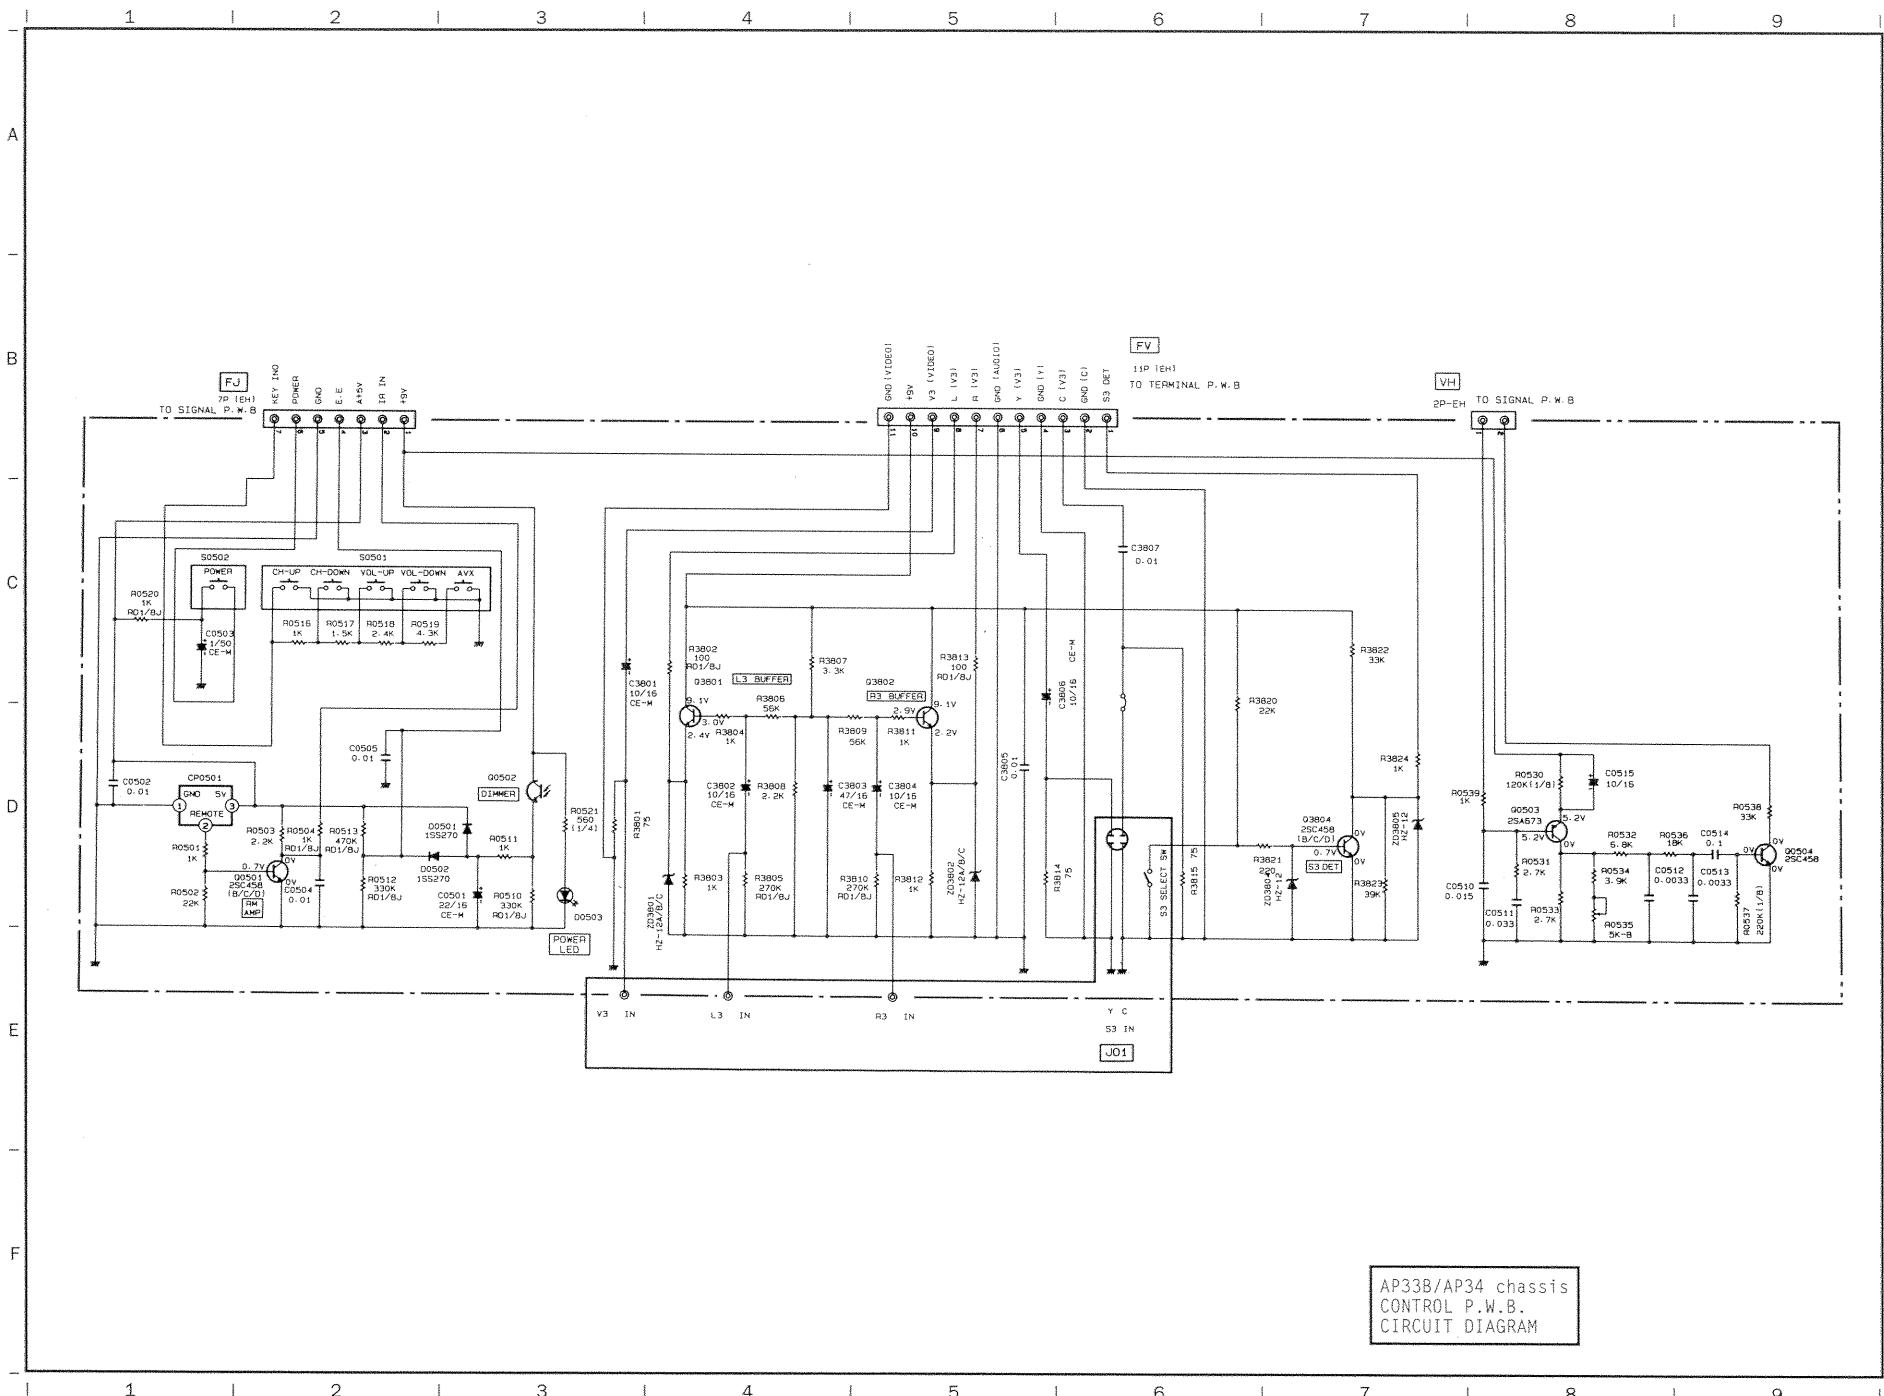

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

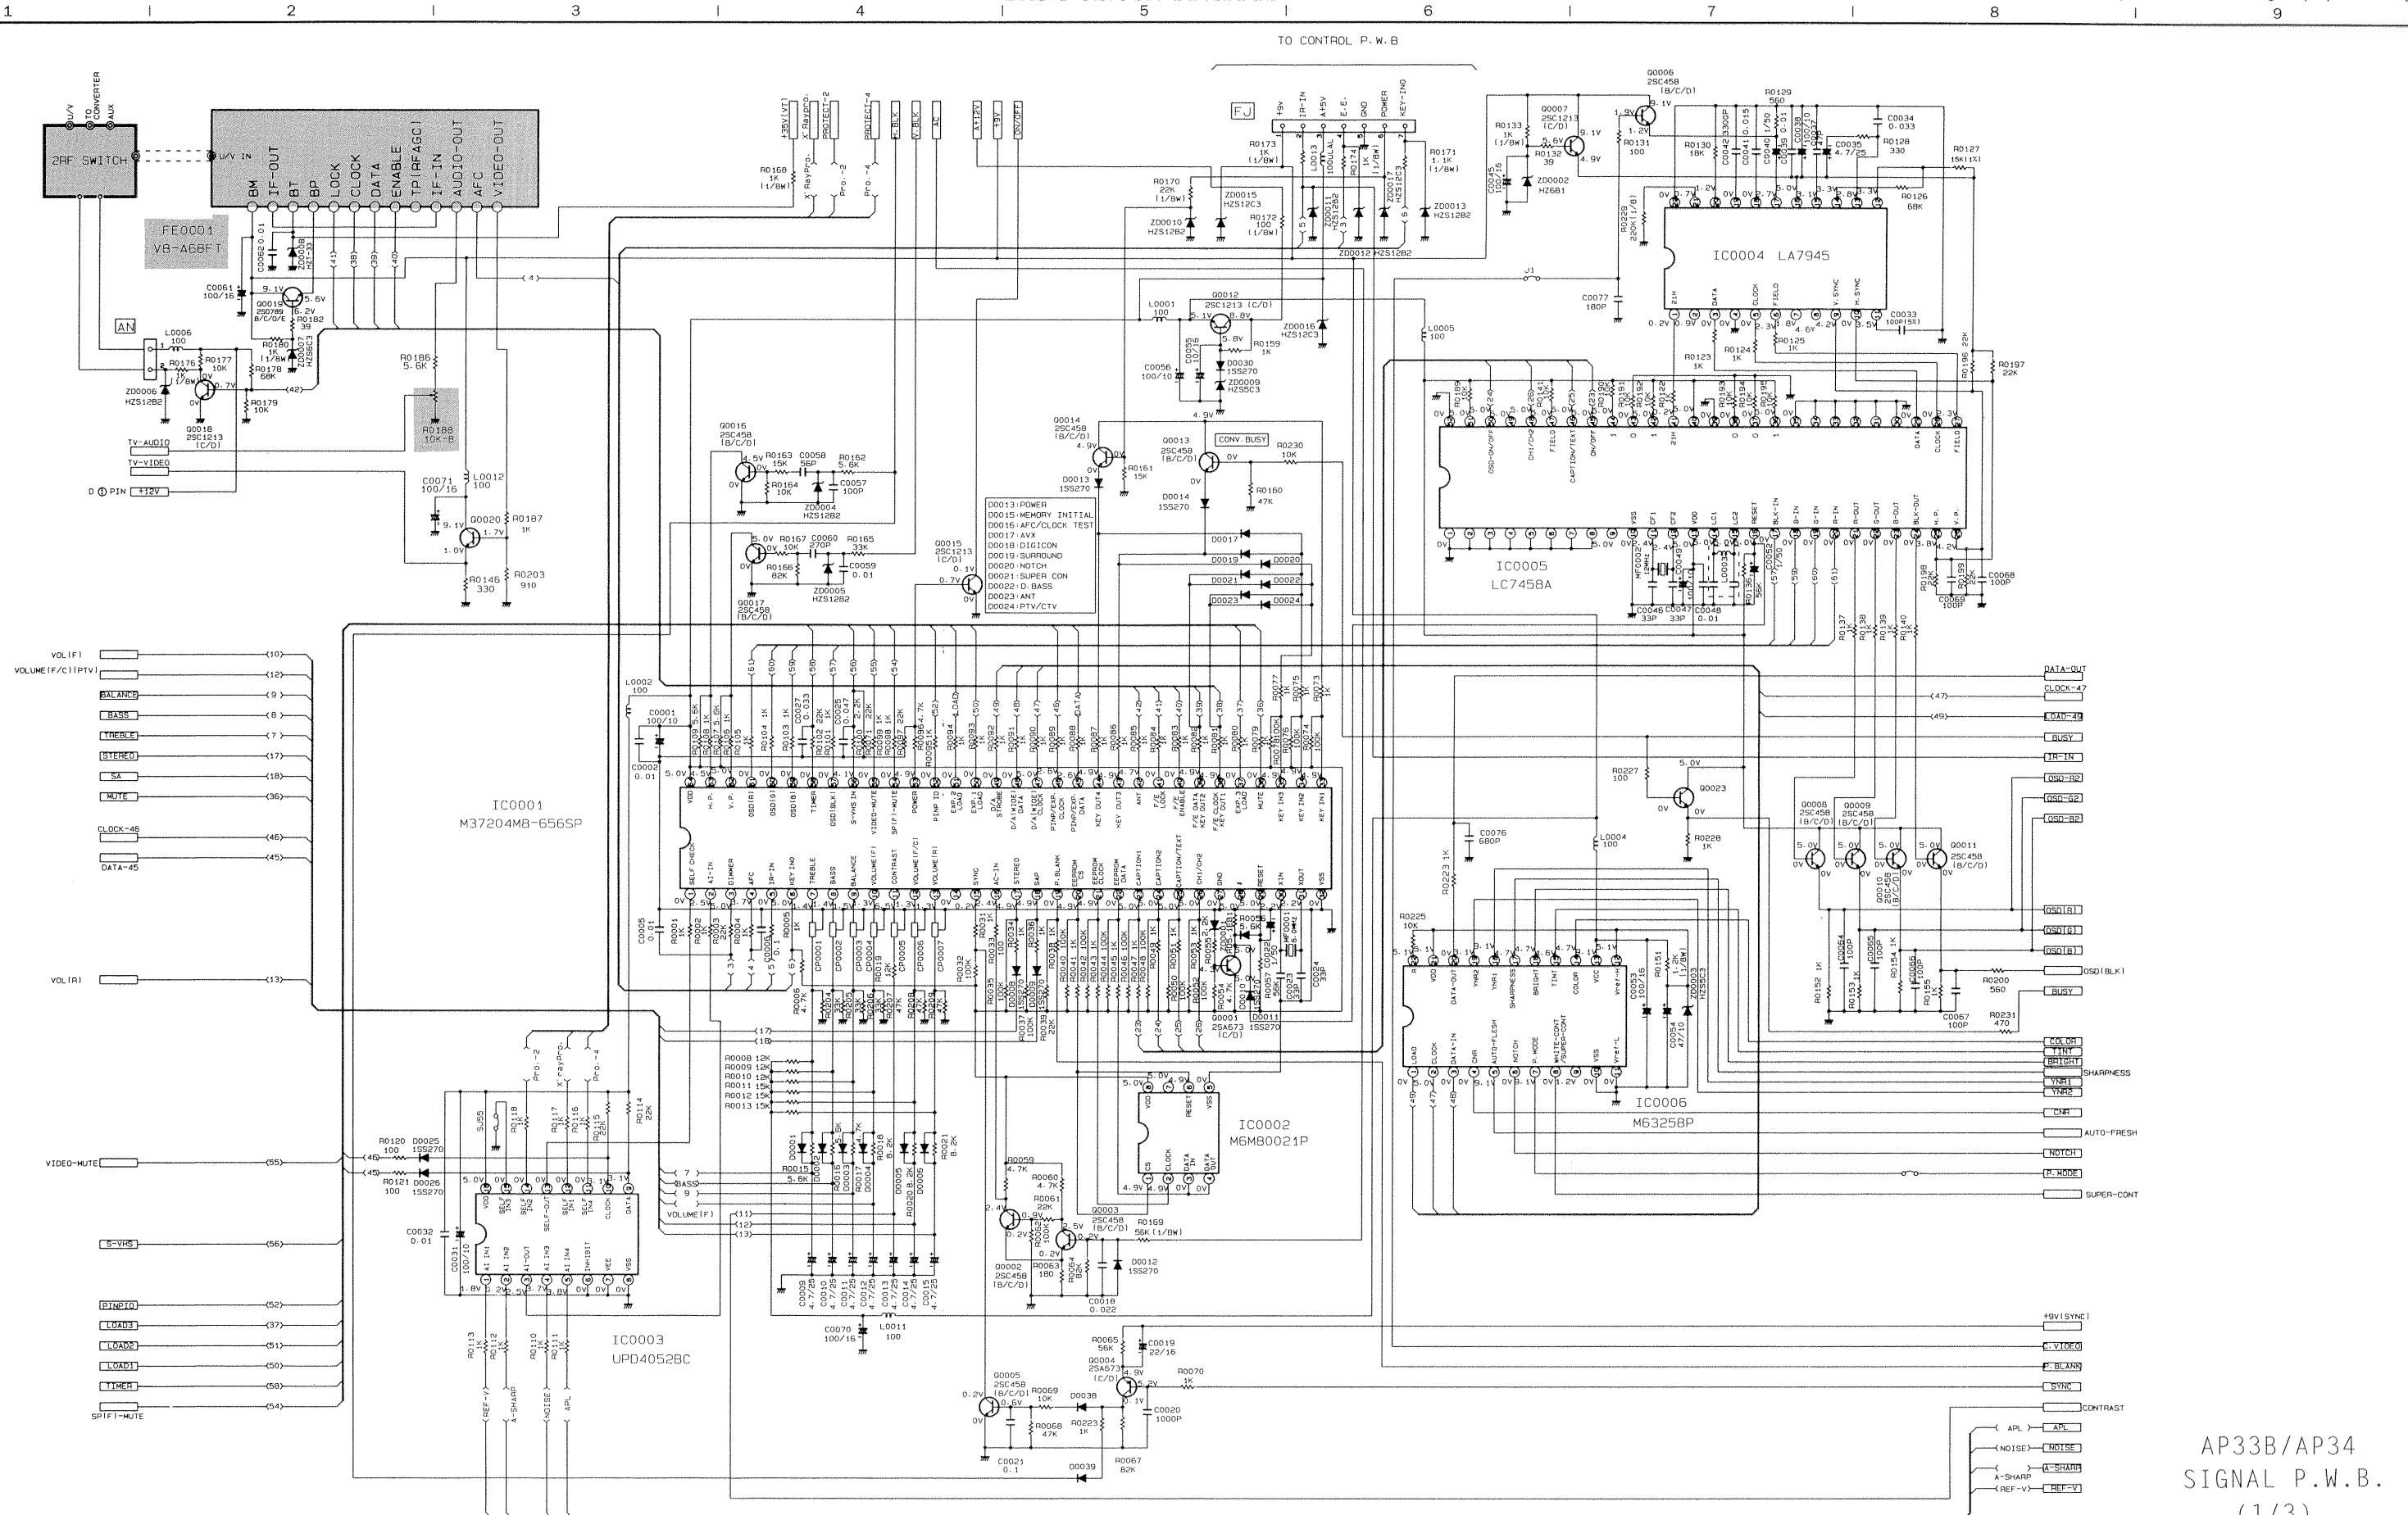


AP33B/AP34  
SIGNAL P.W.B.  
(1/3)

\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

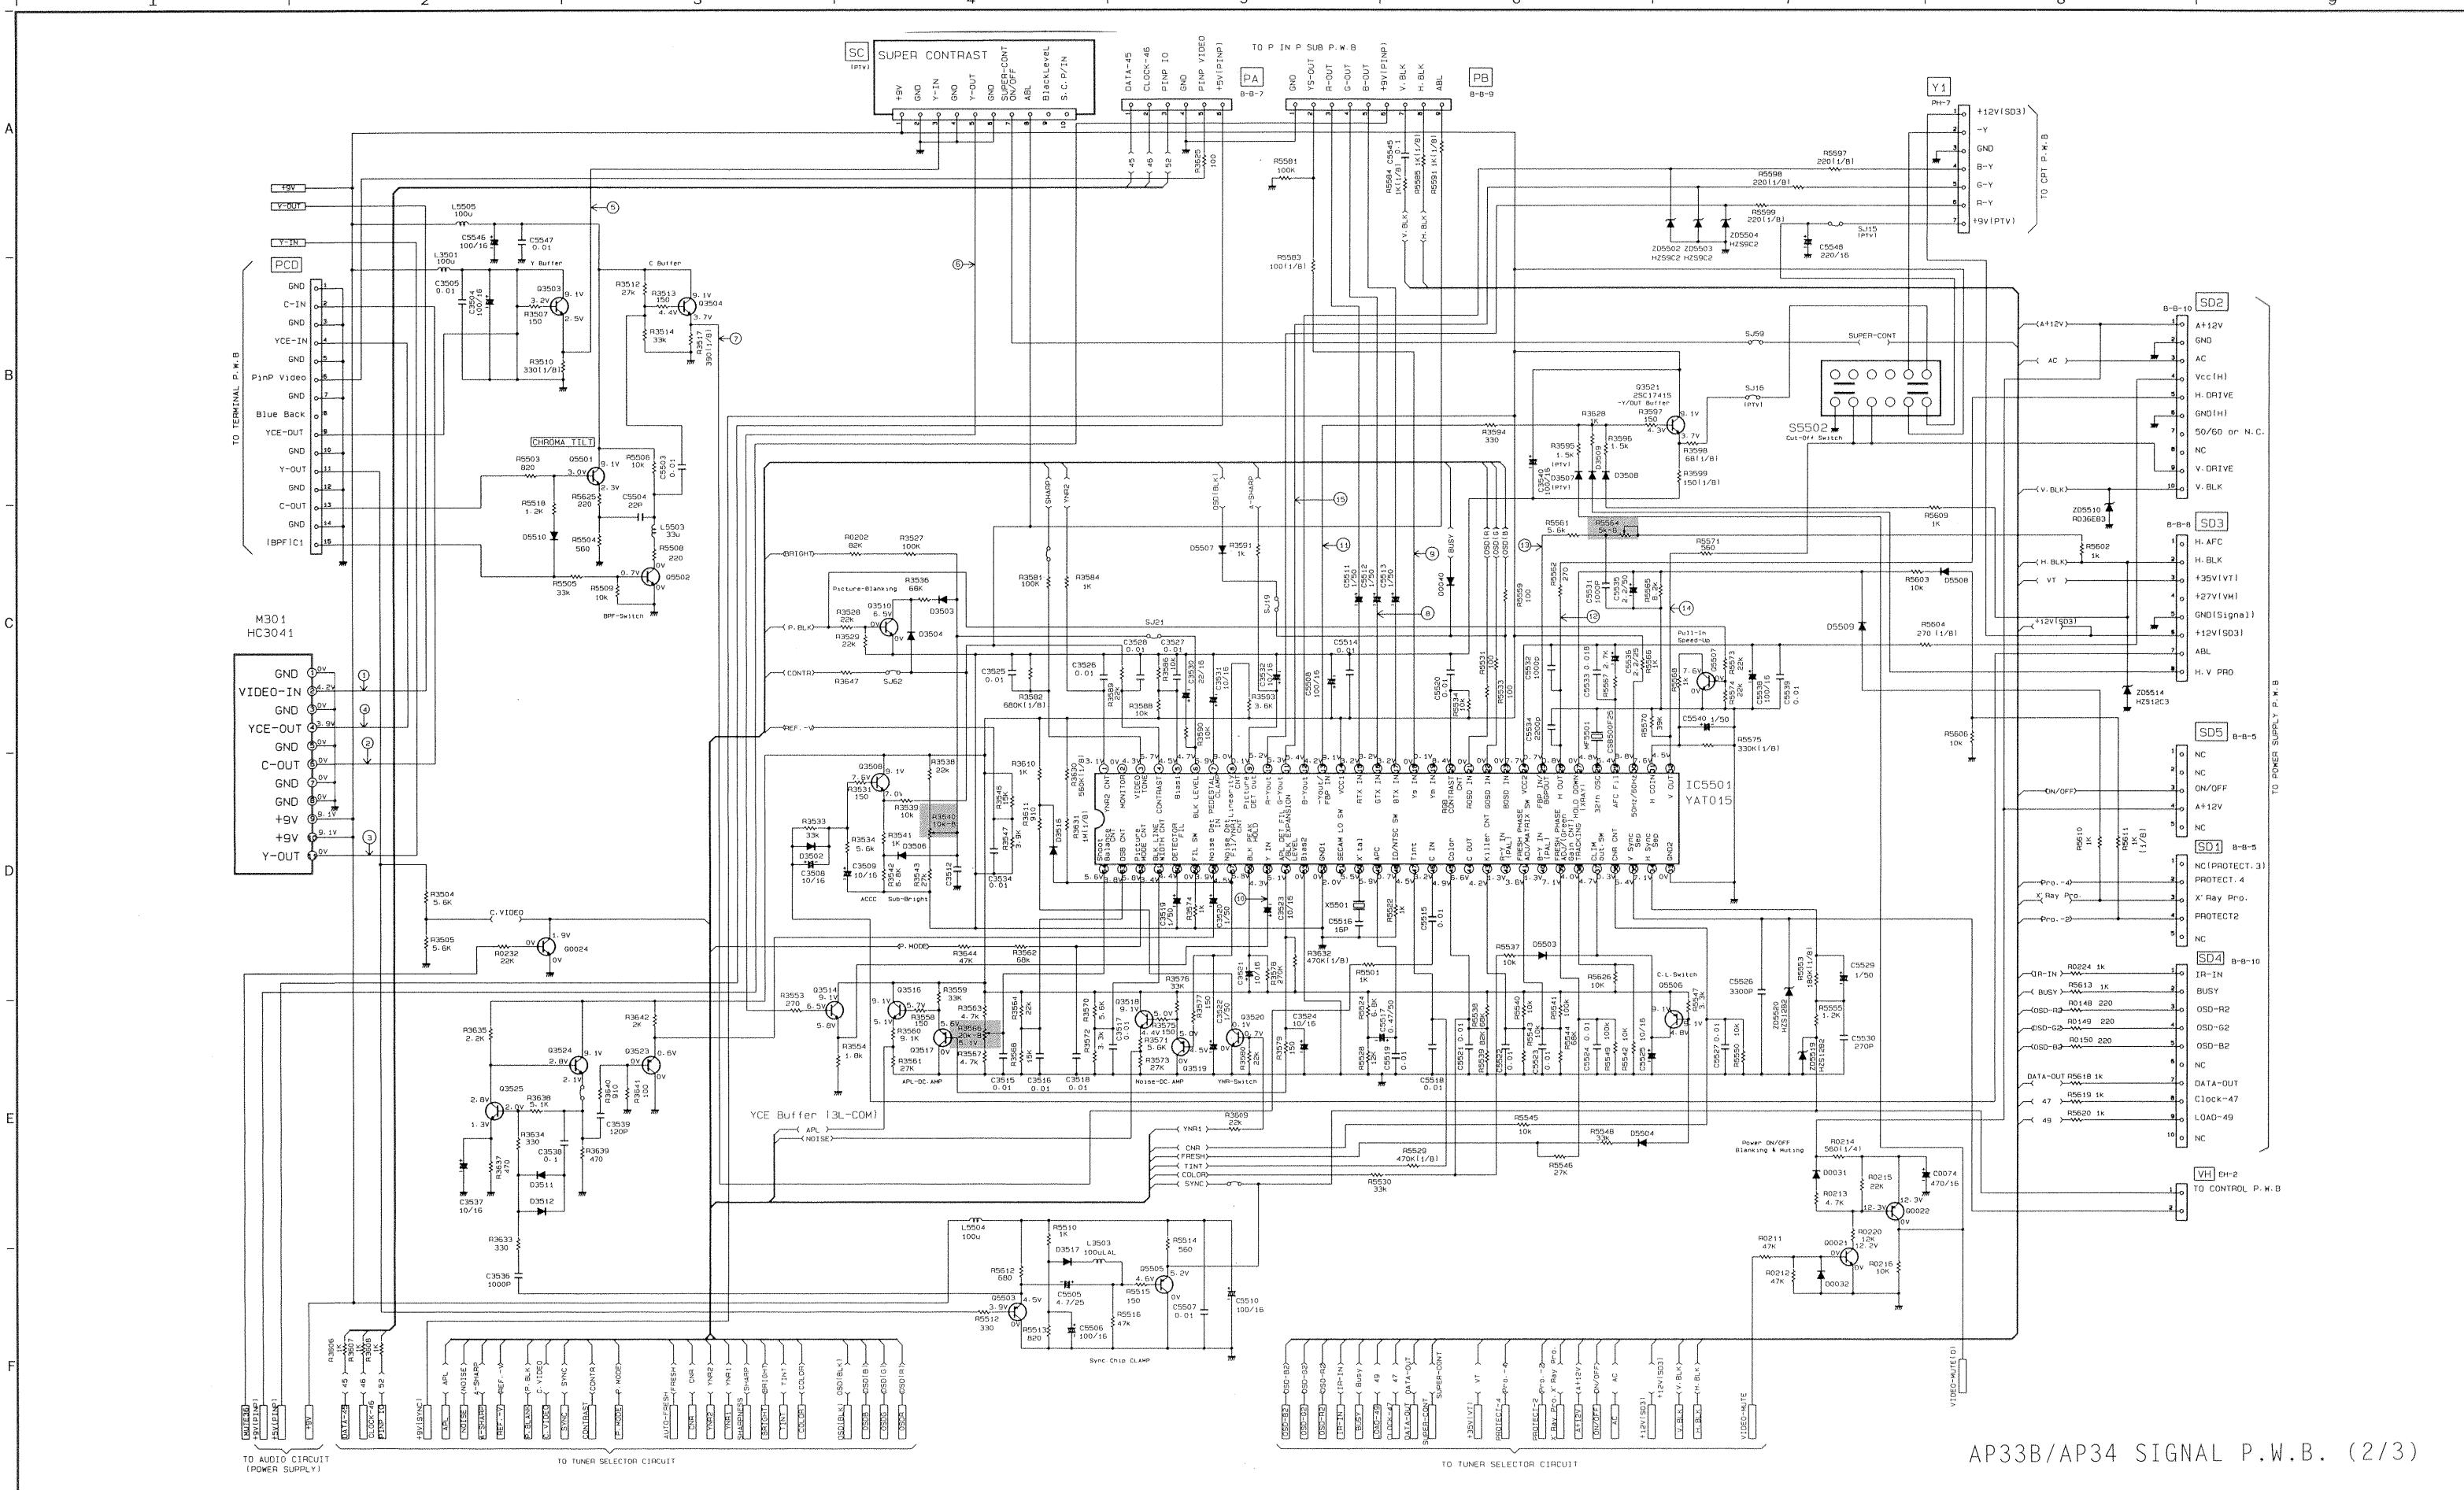


\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

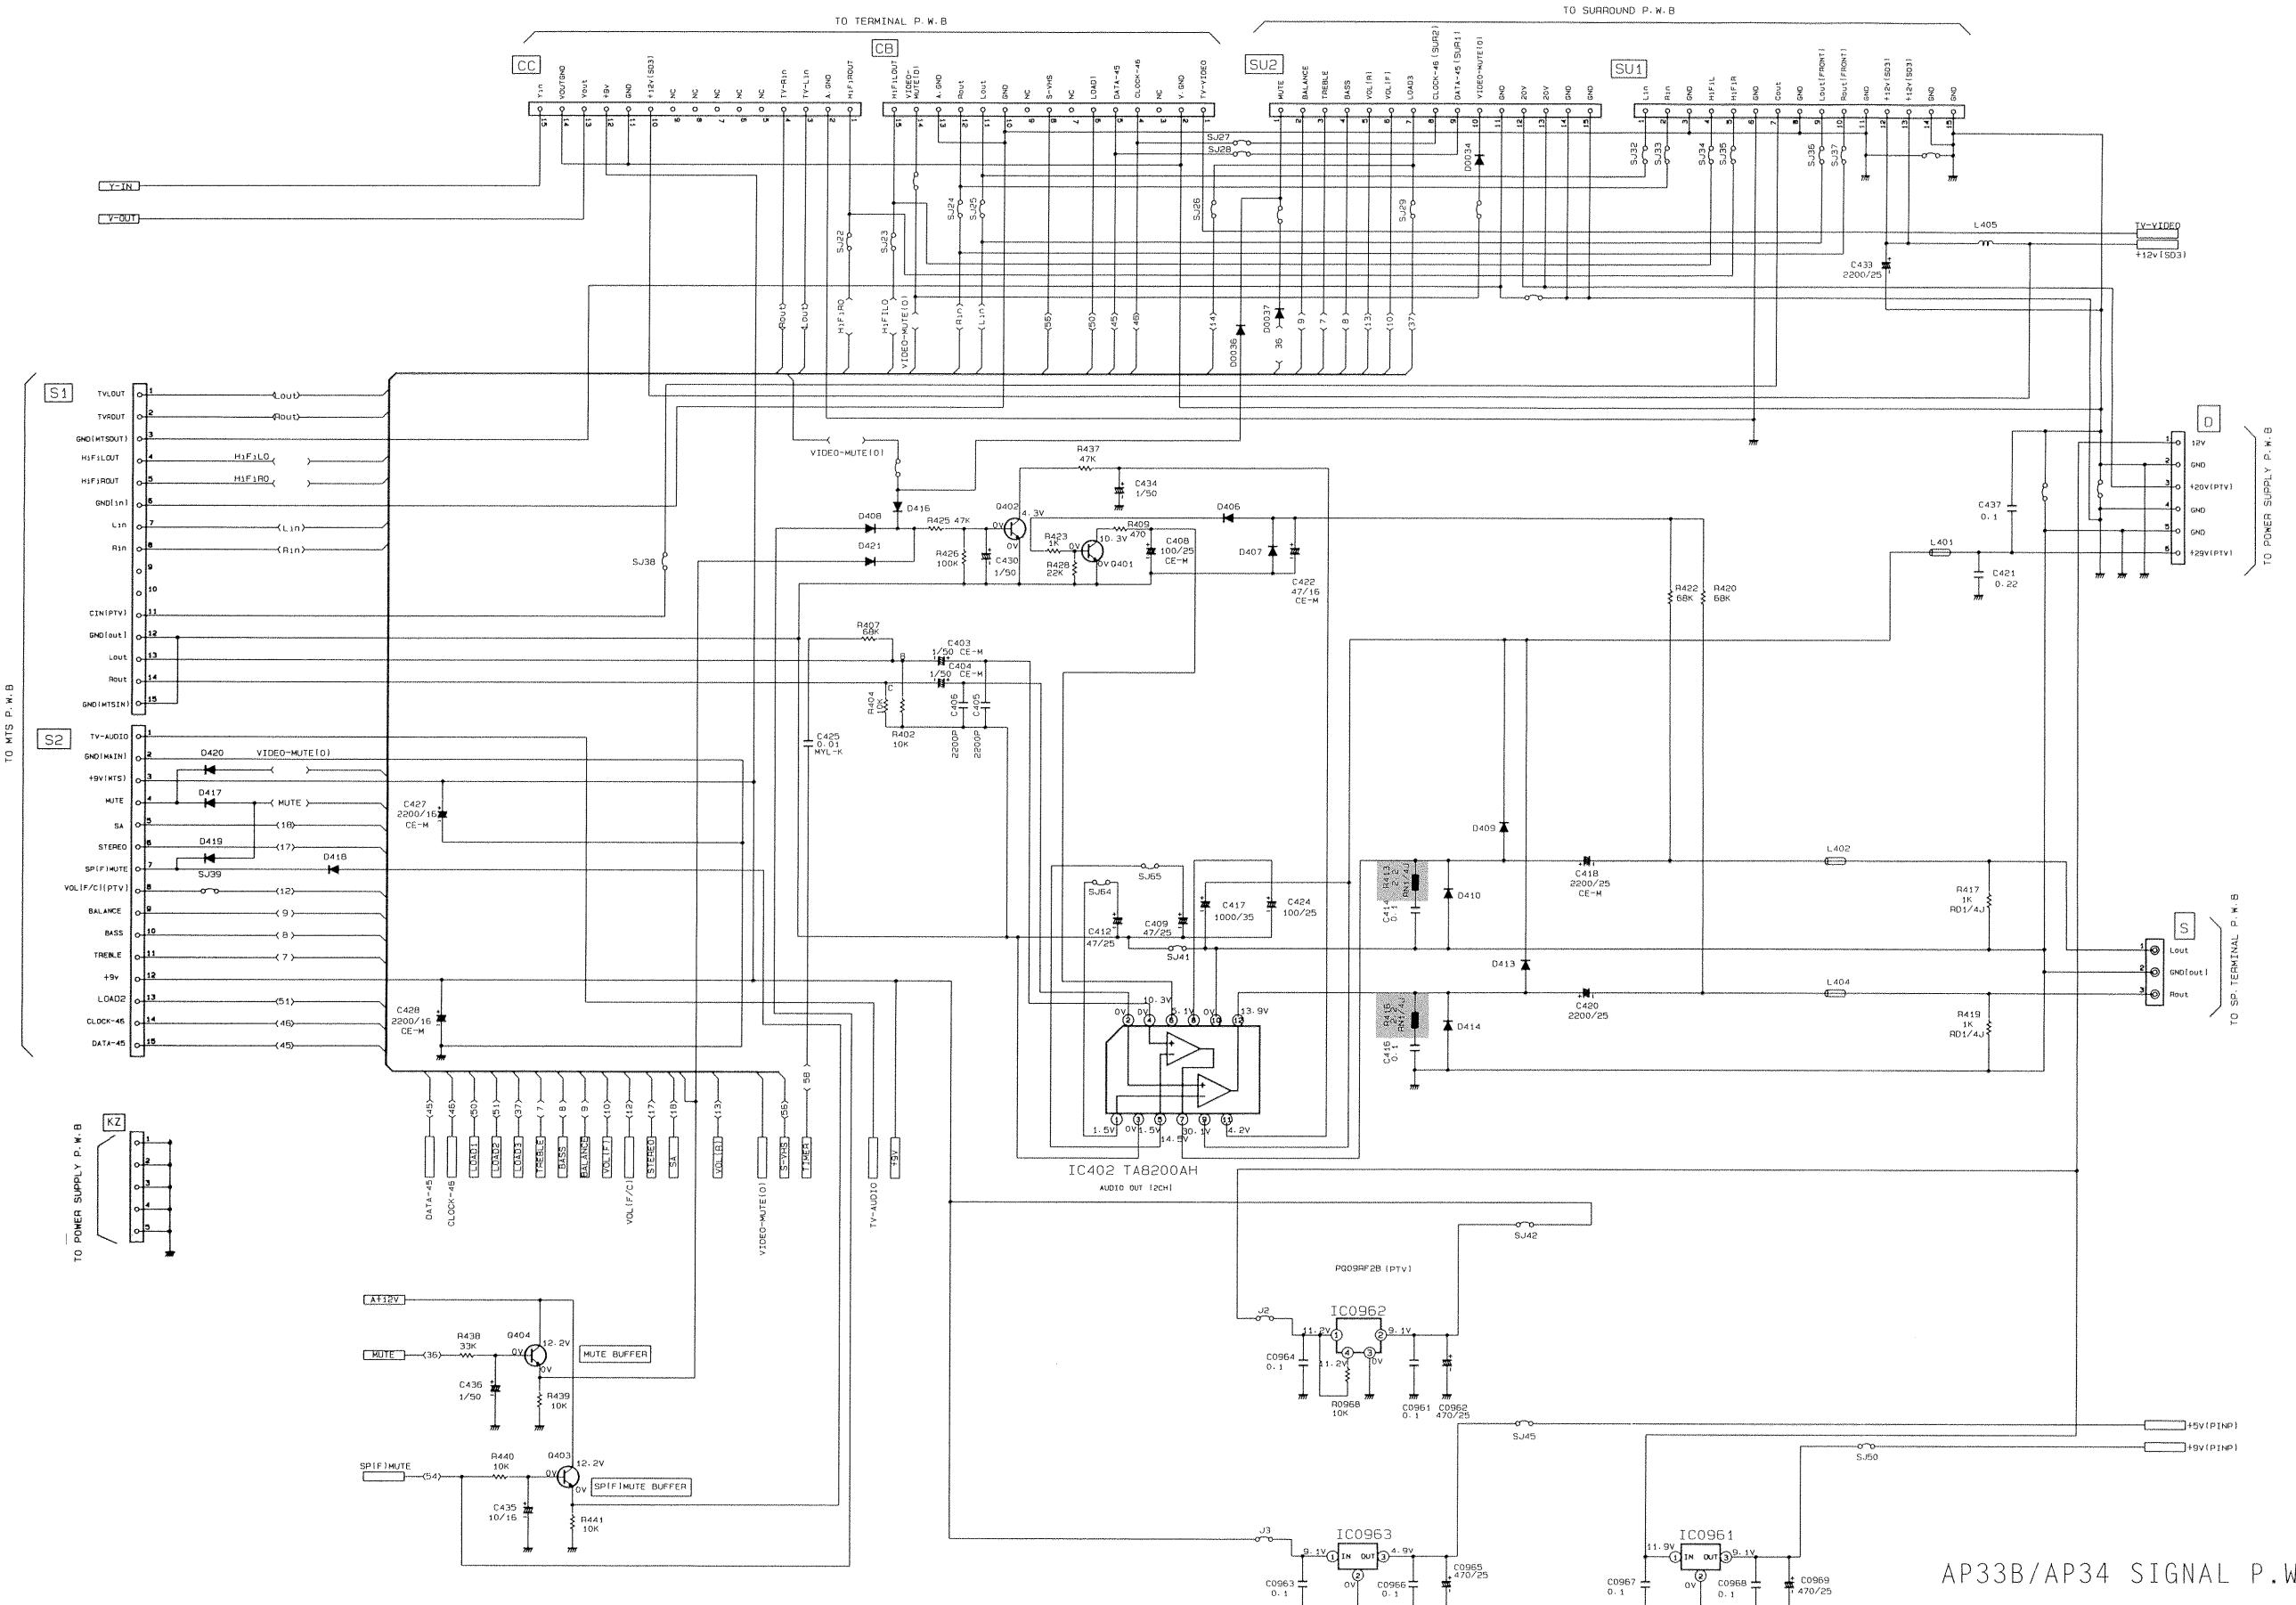


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

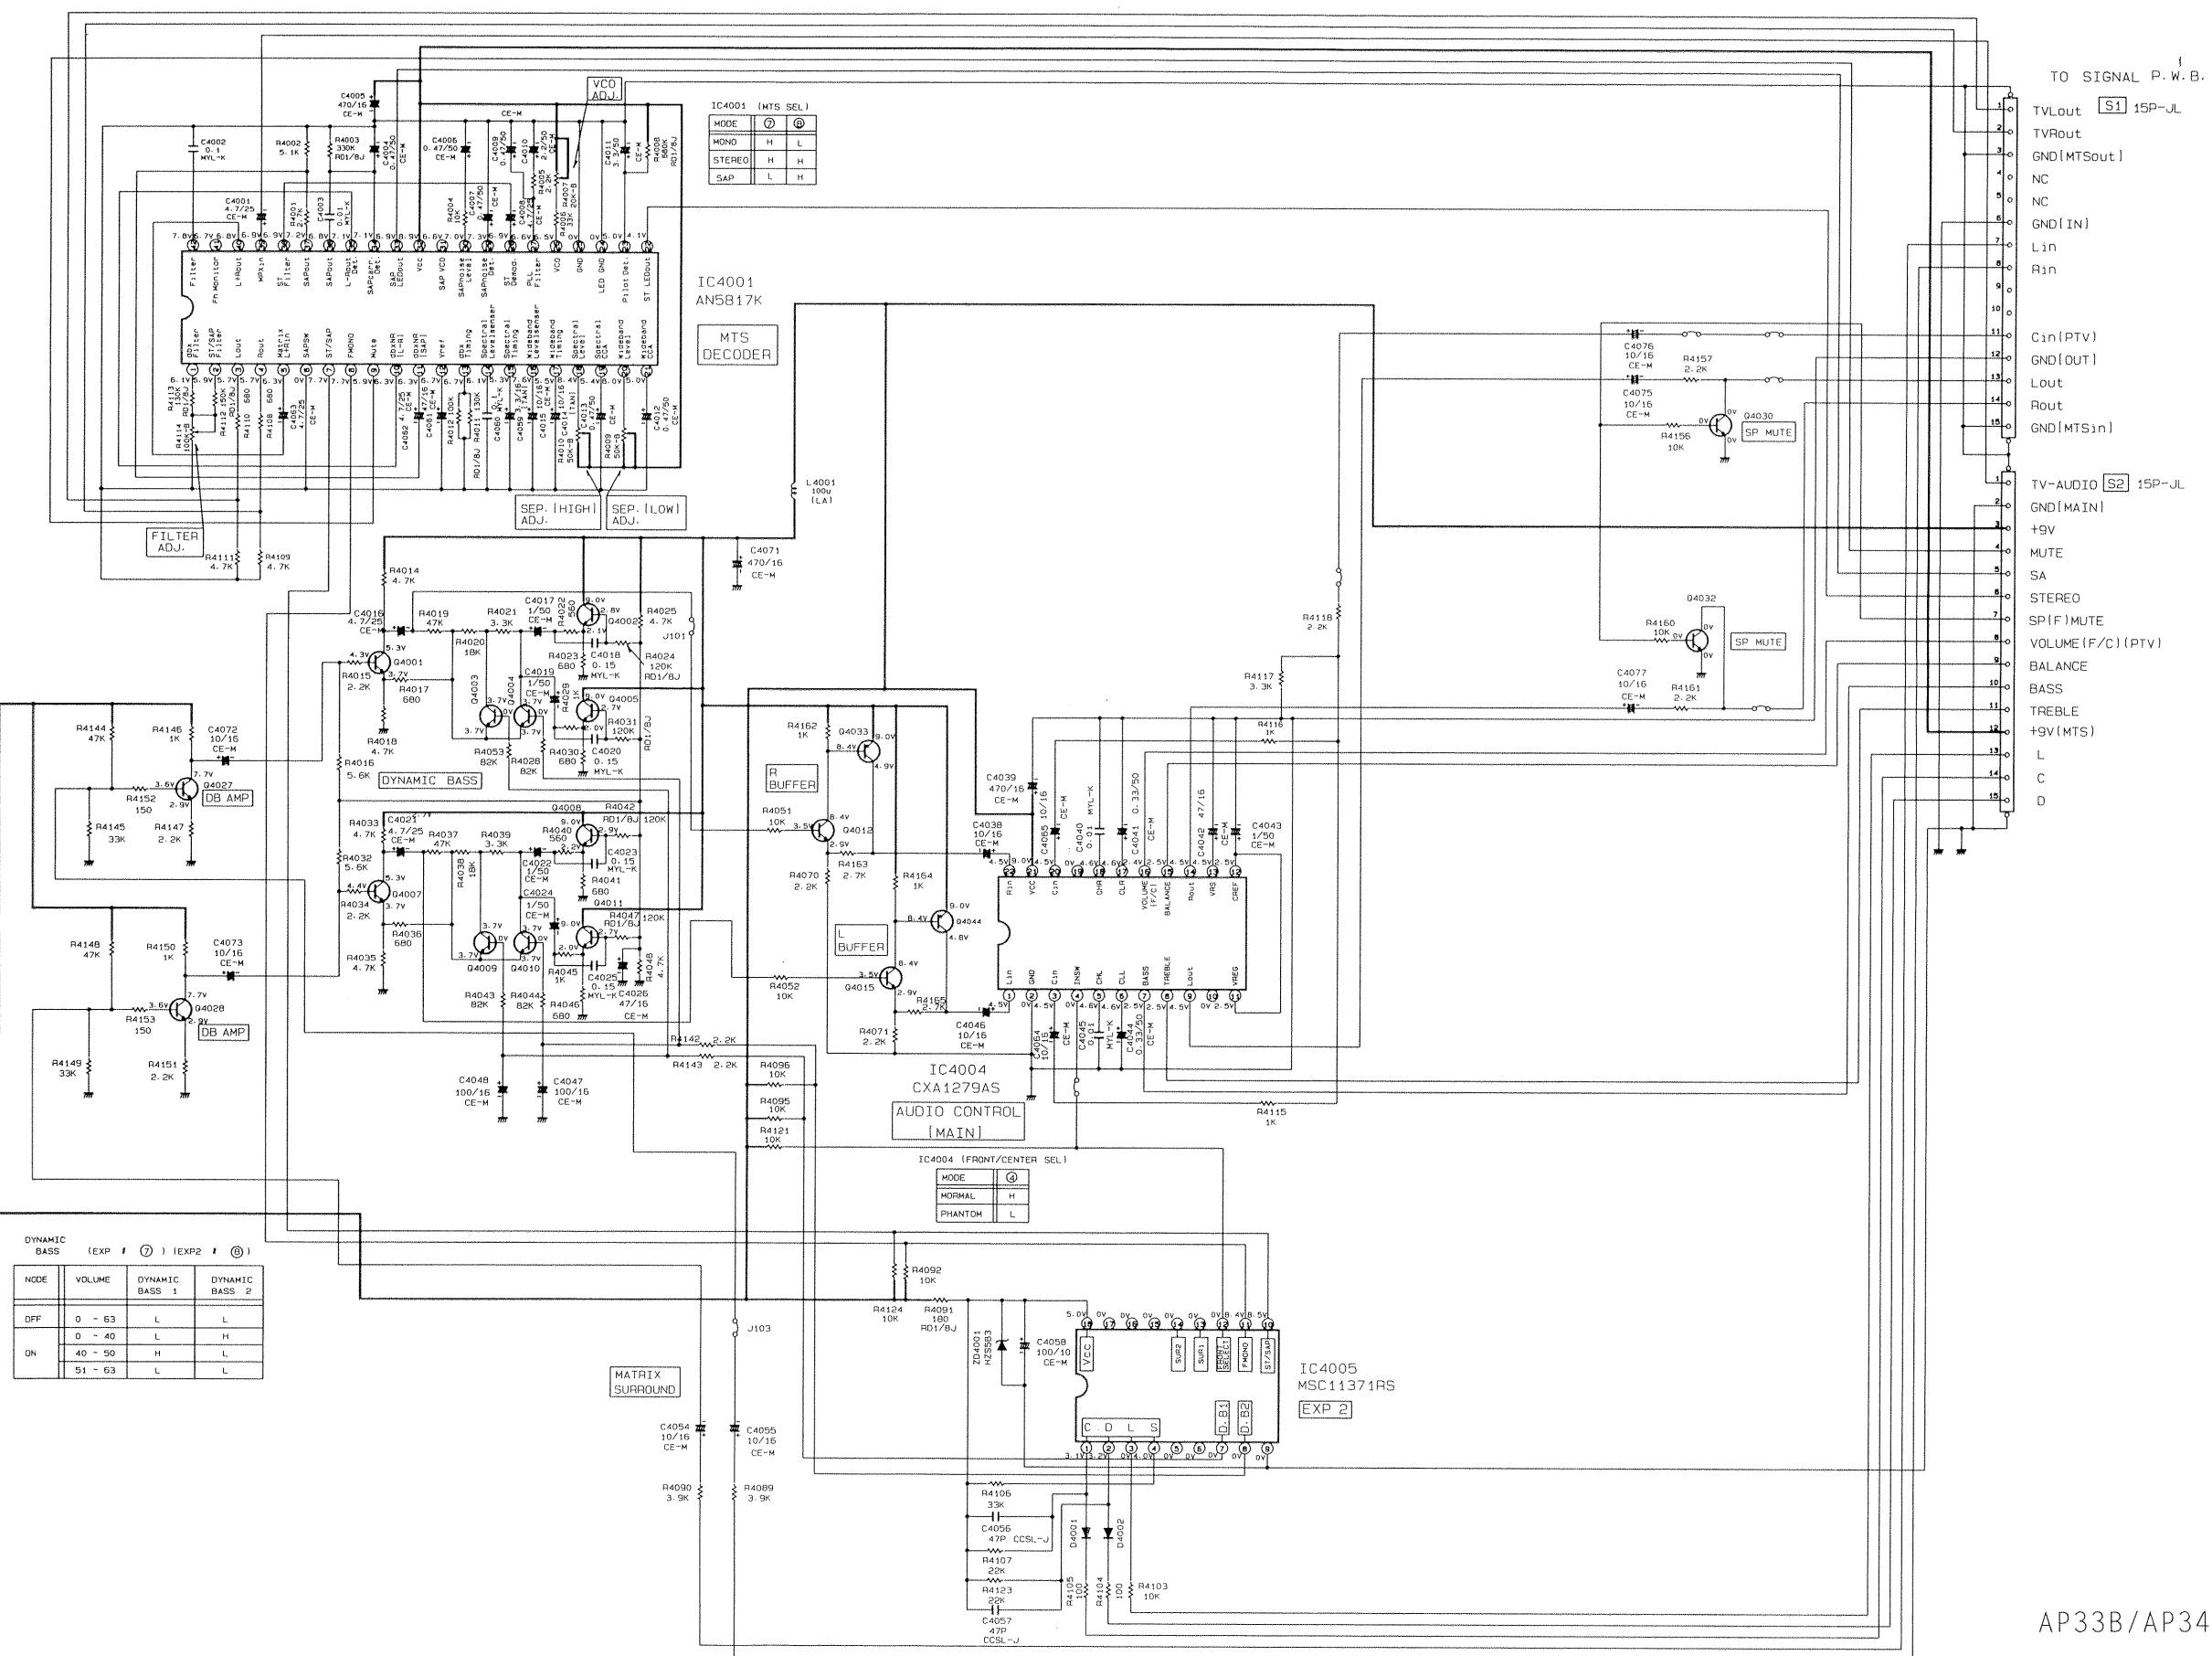


\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

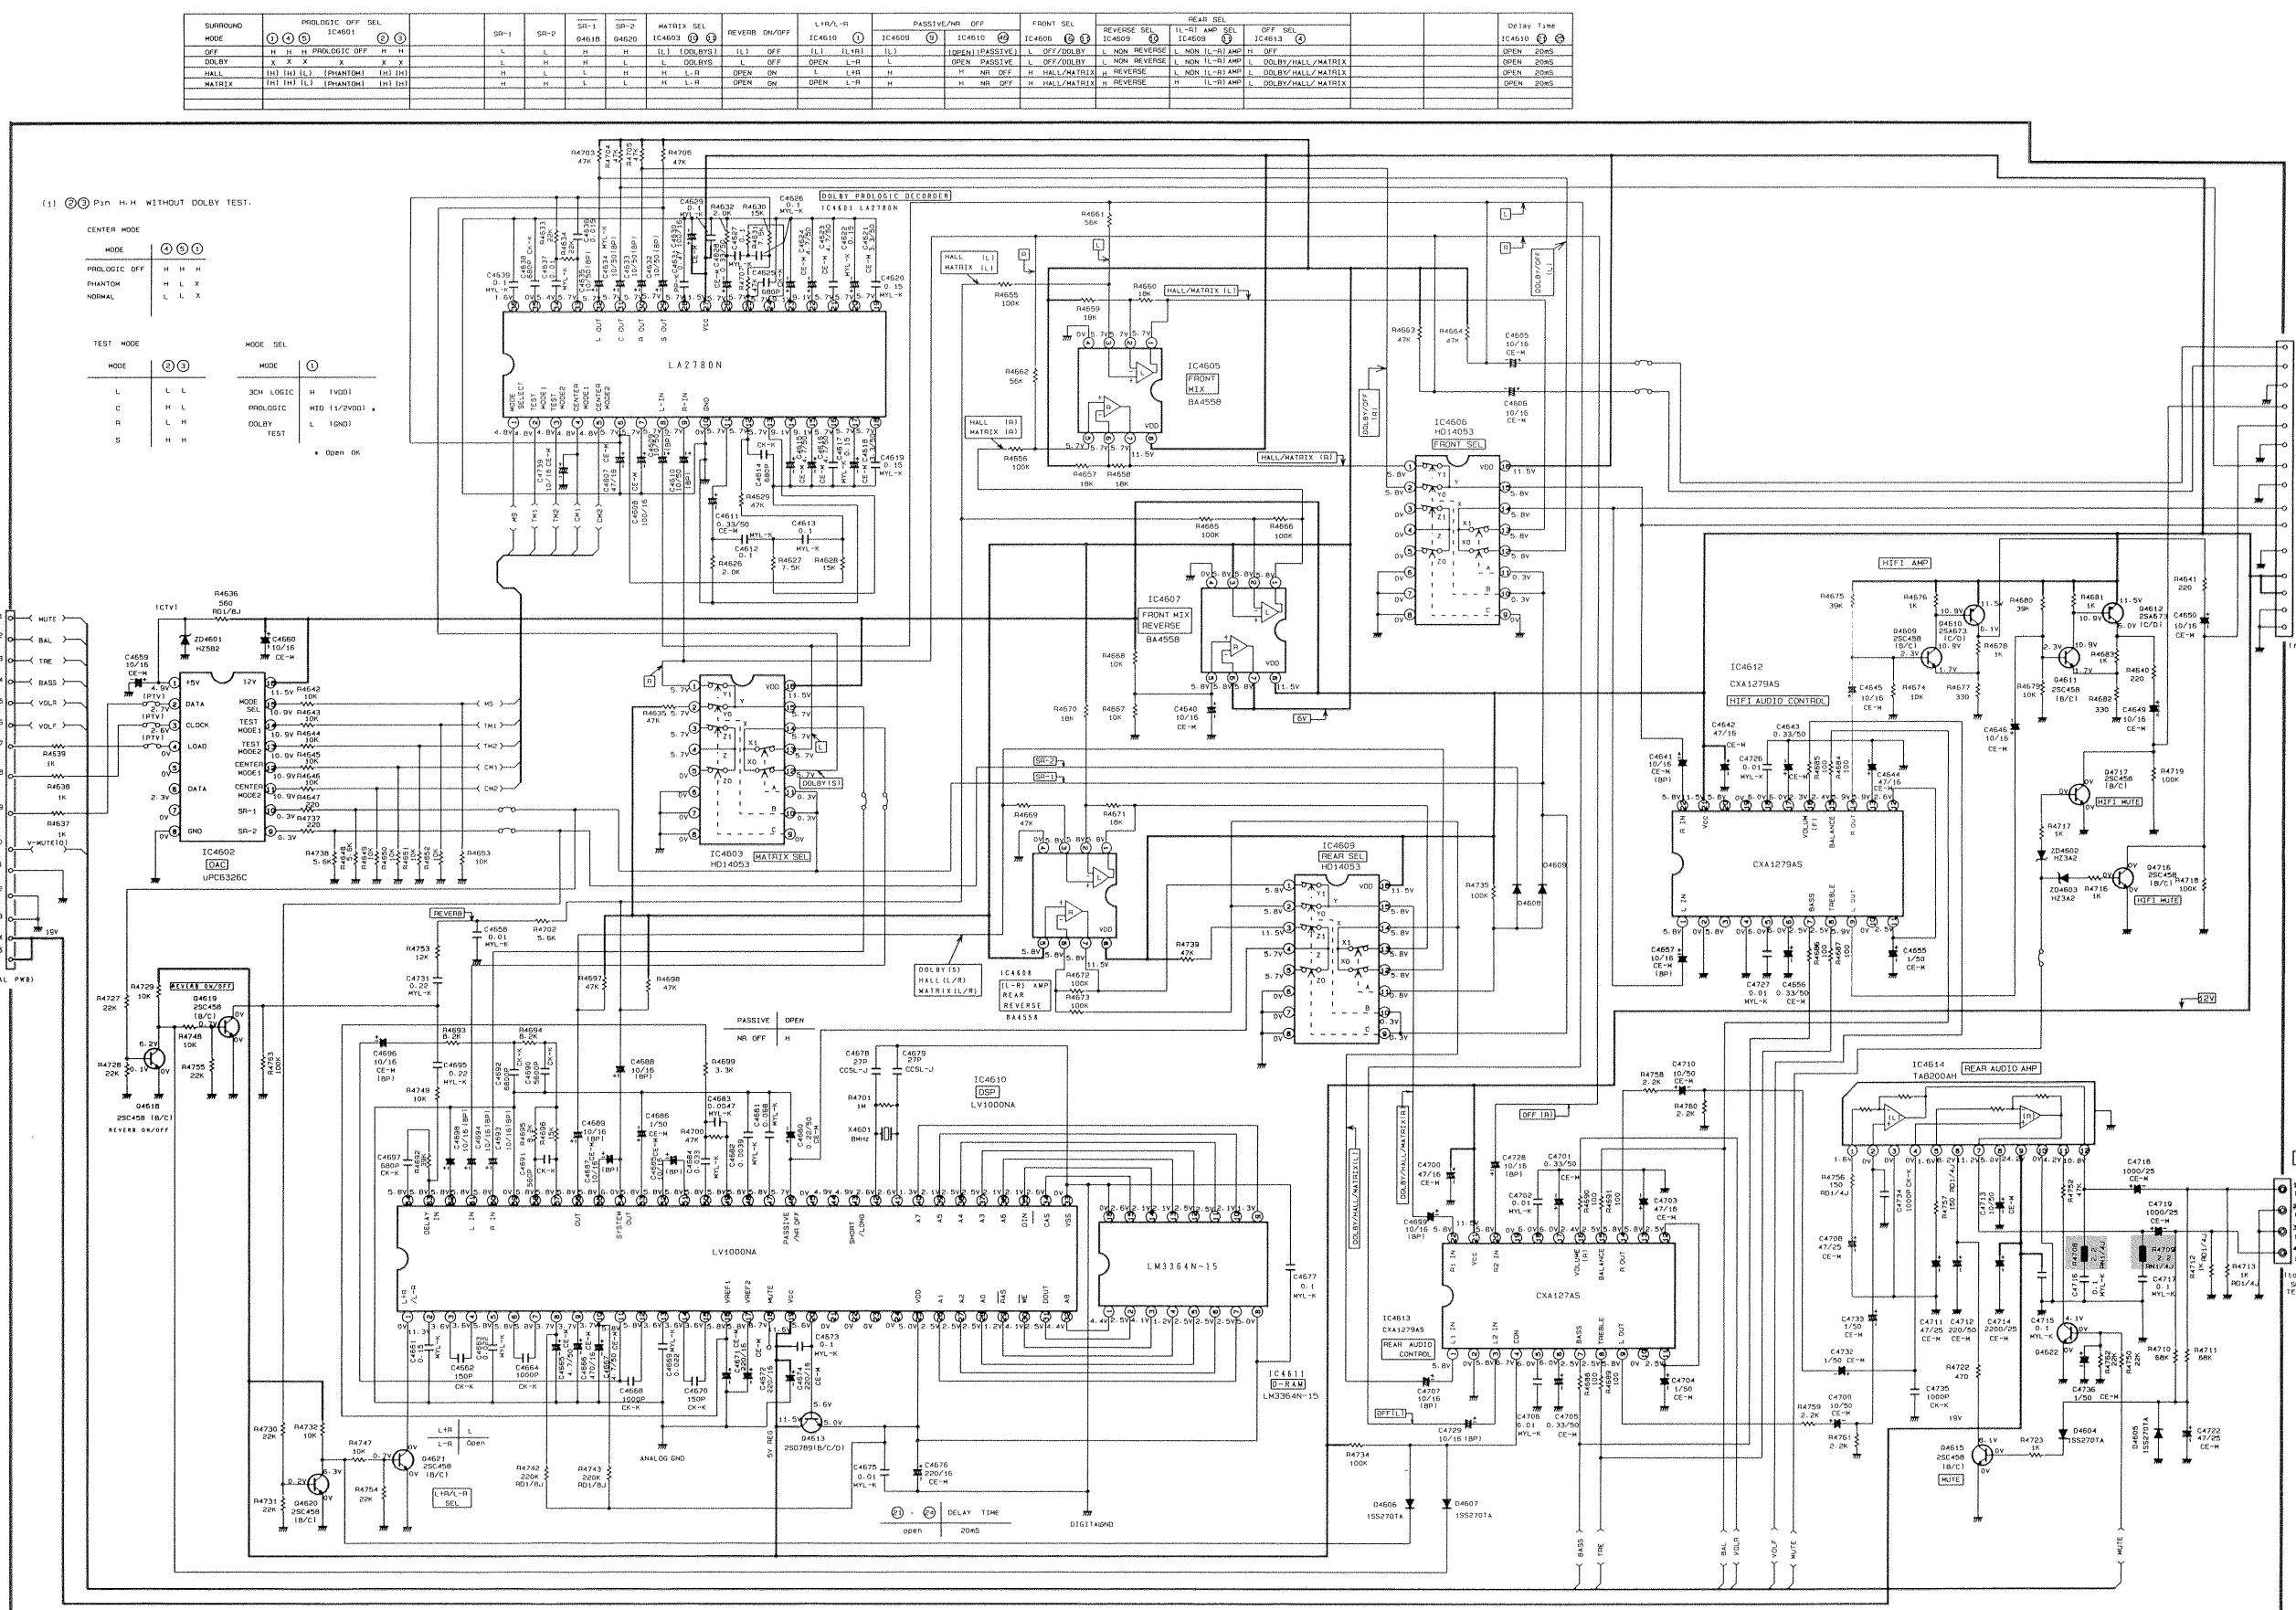


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

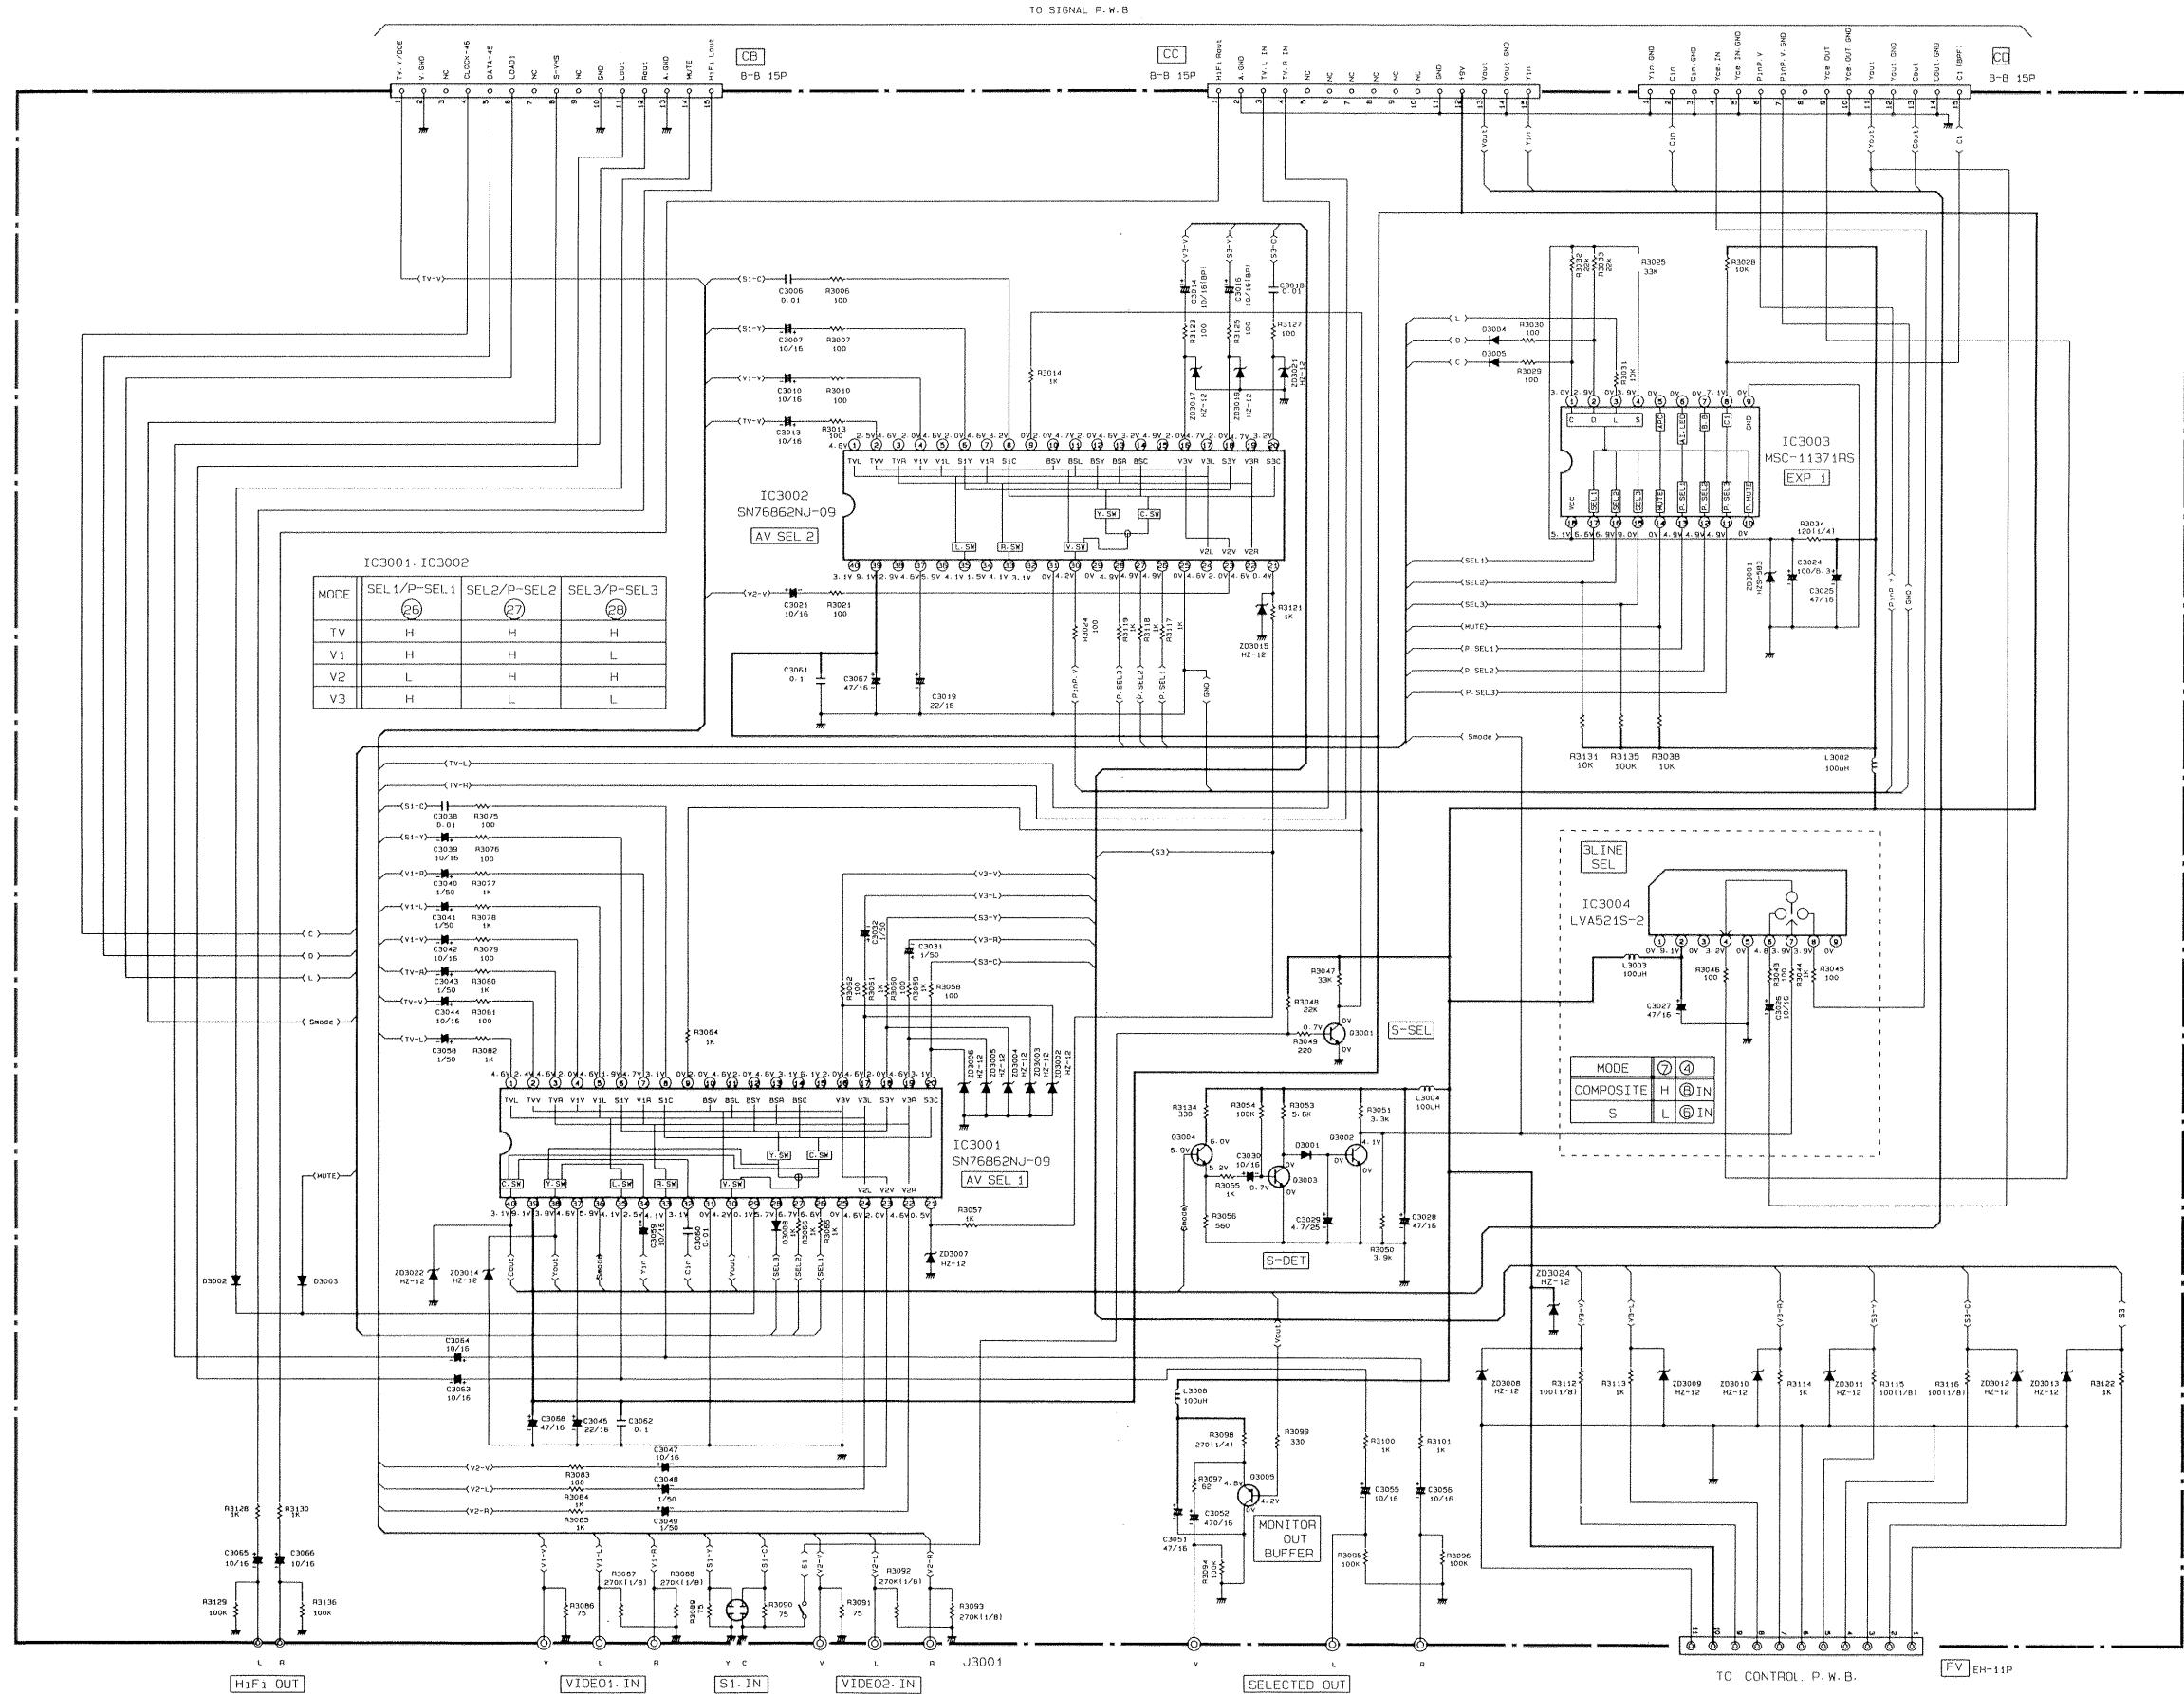


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

**PRODUCT SAFETY NOTE:** Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

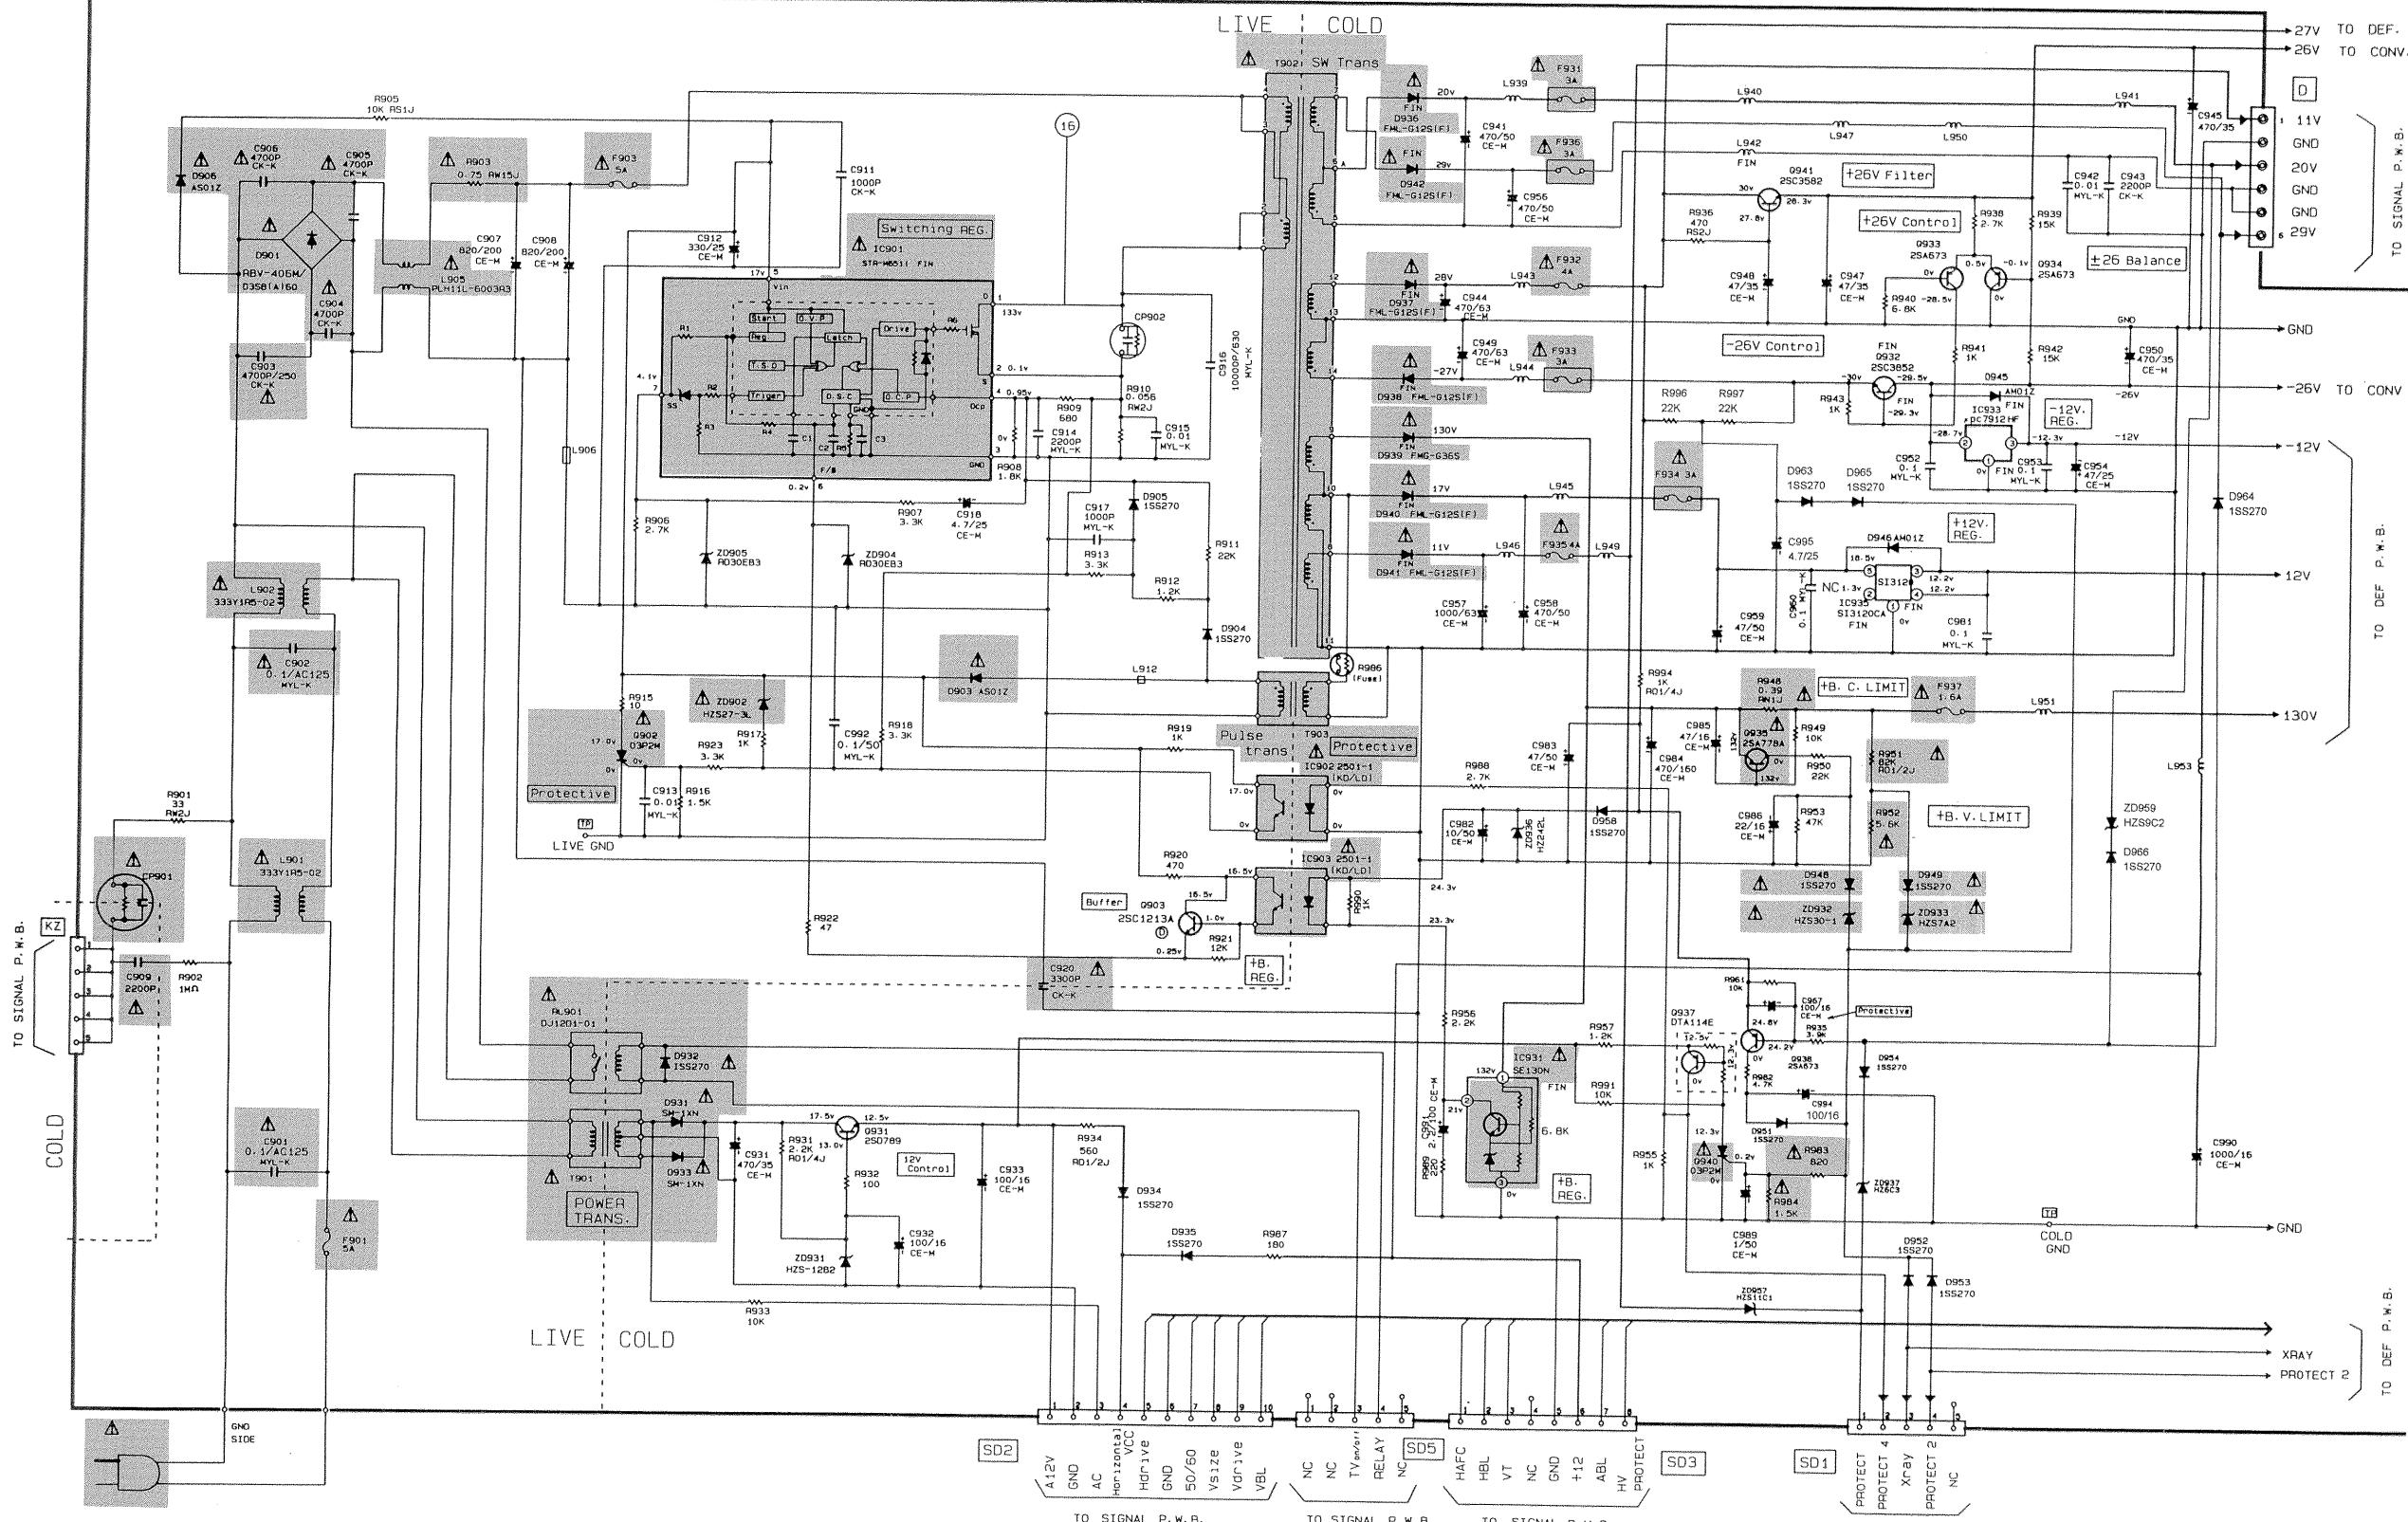


AP33B/AP34 POWER SUPPLY CIRCUIT  
(POWER/DEFLECTION P.W.B.)

\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

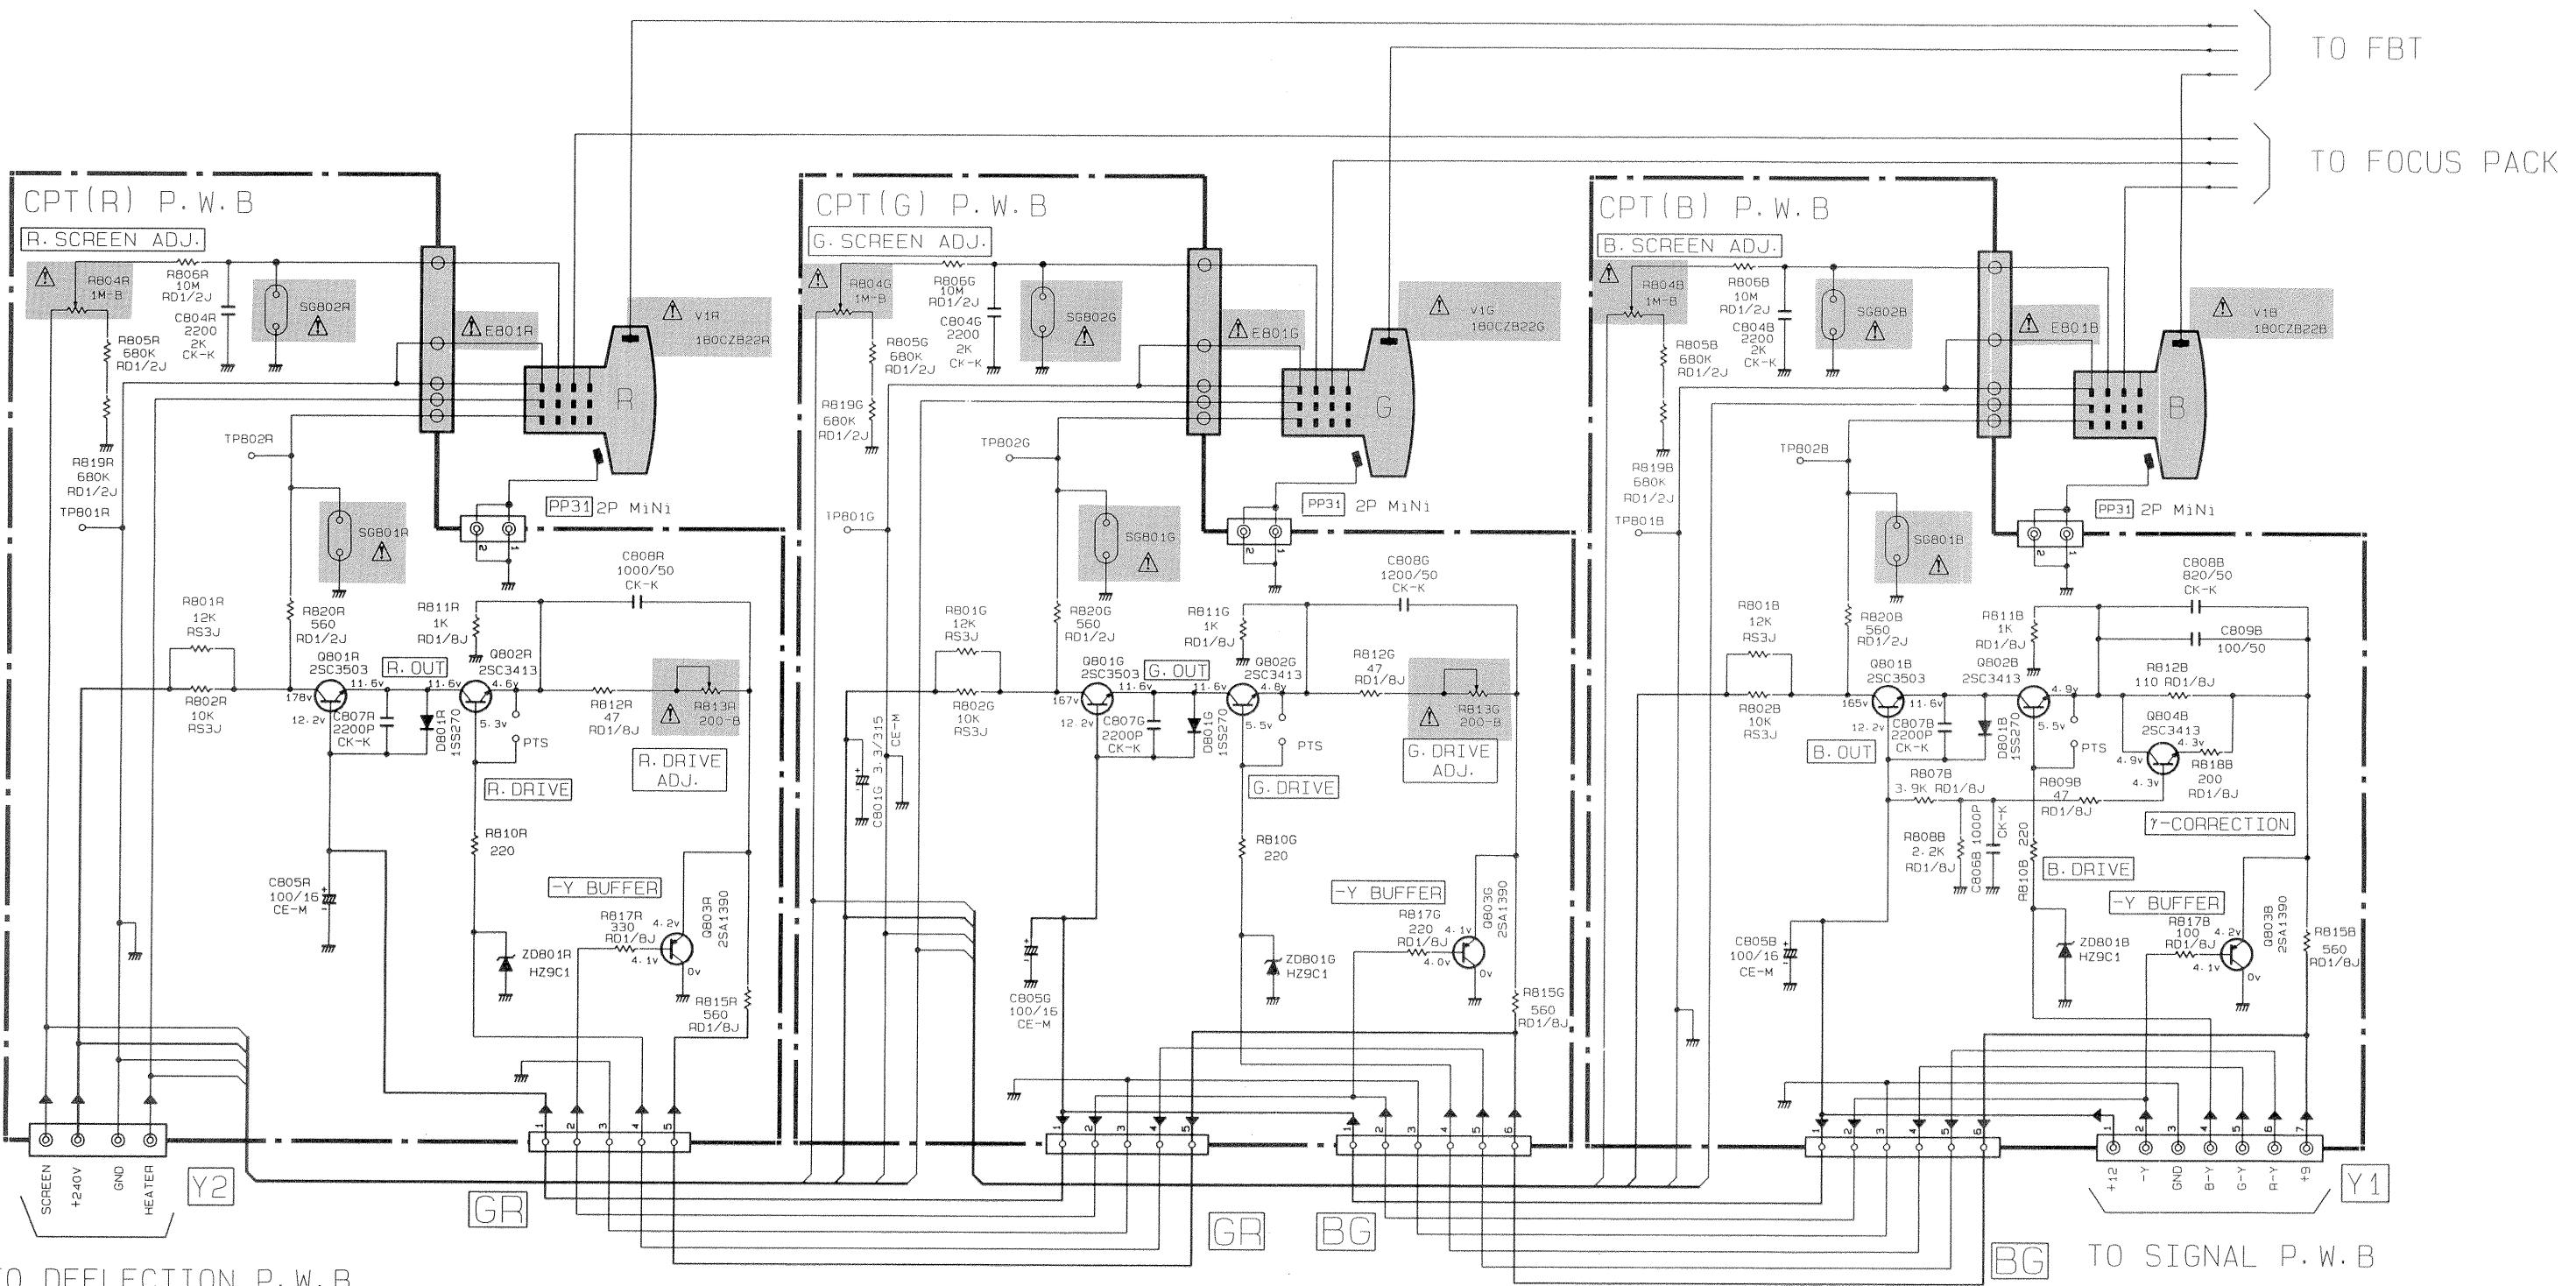


AP33B CPT P.W.B.

\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

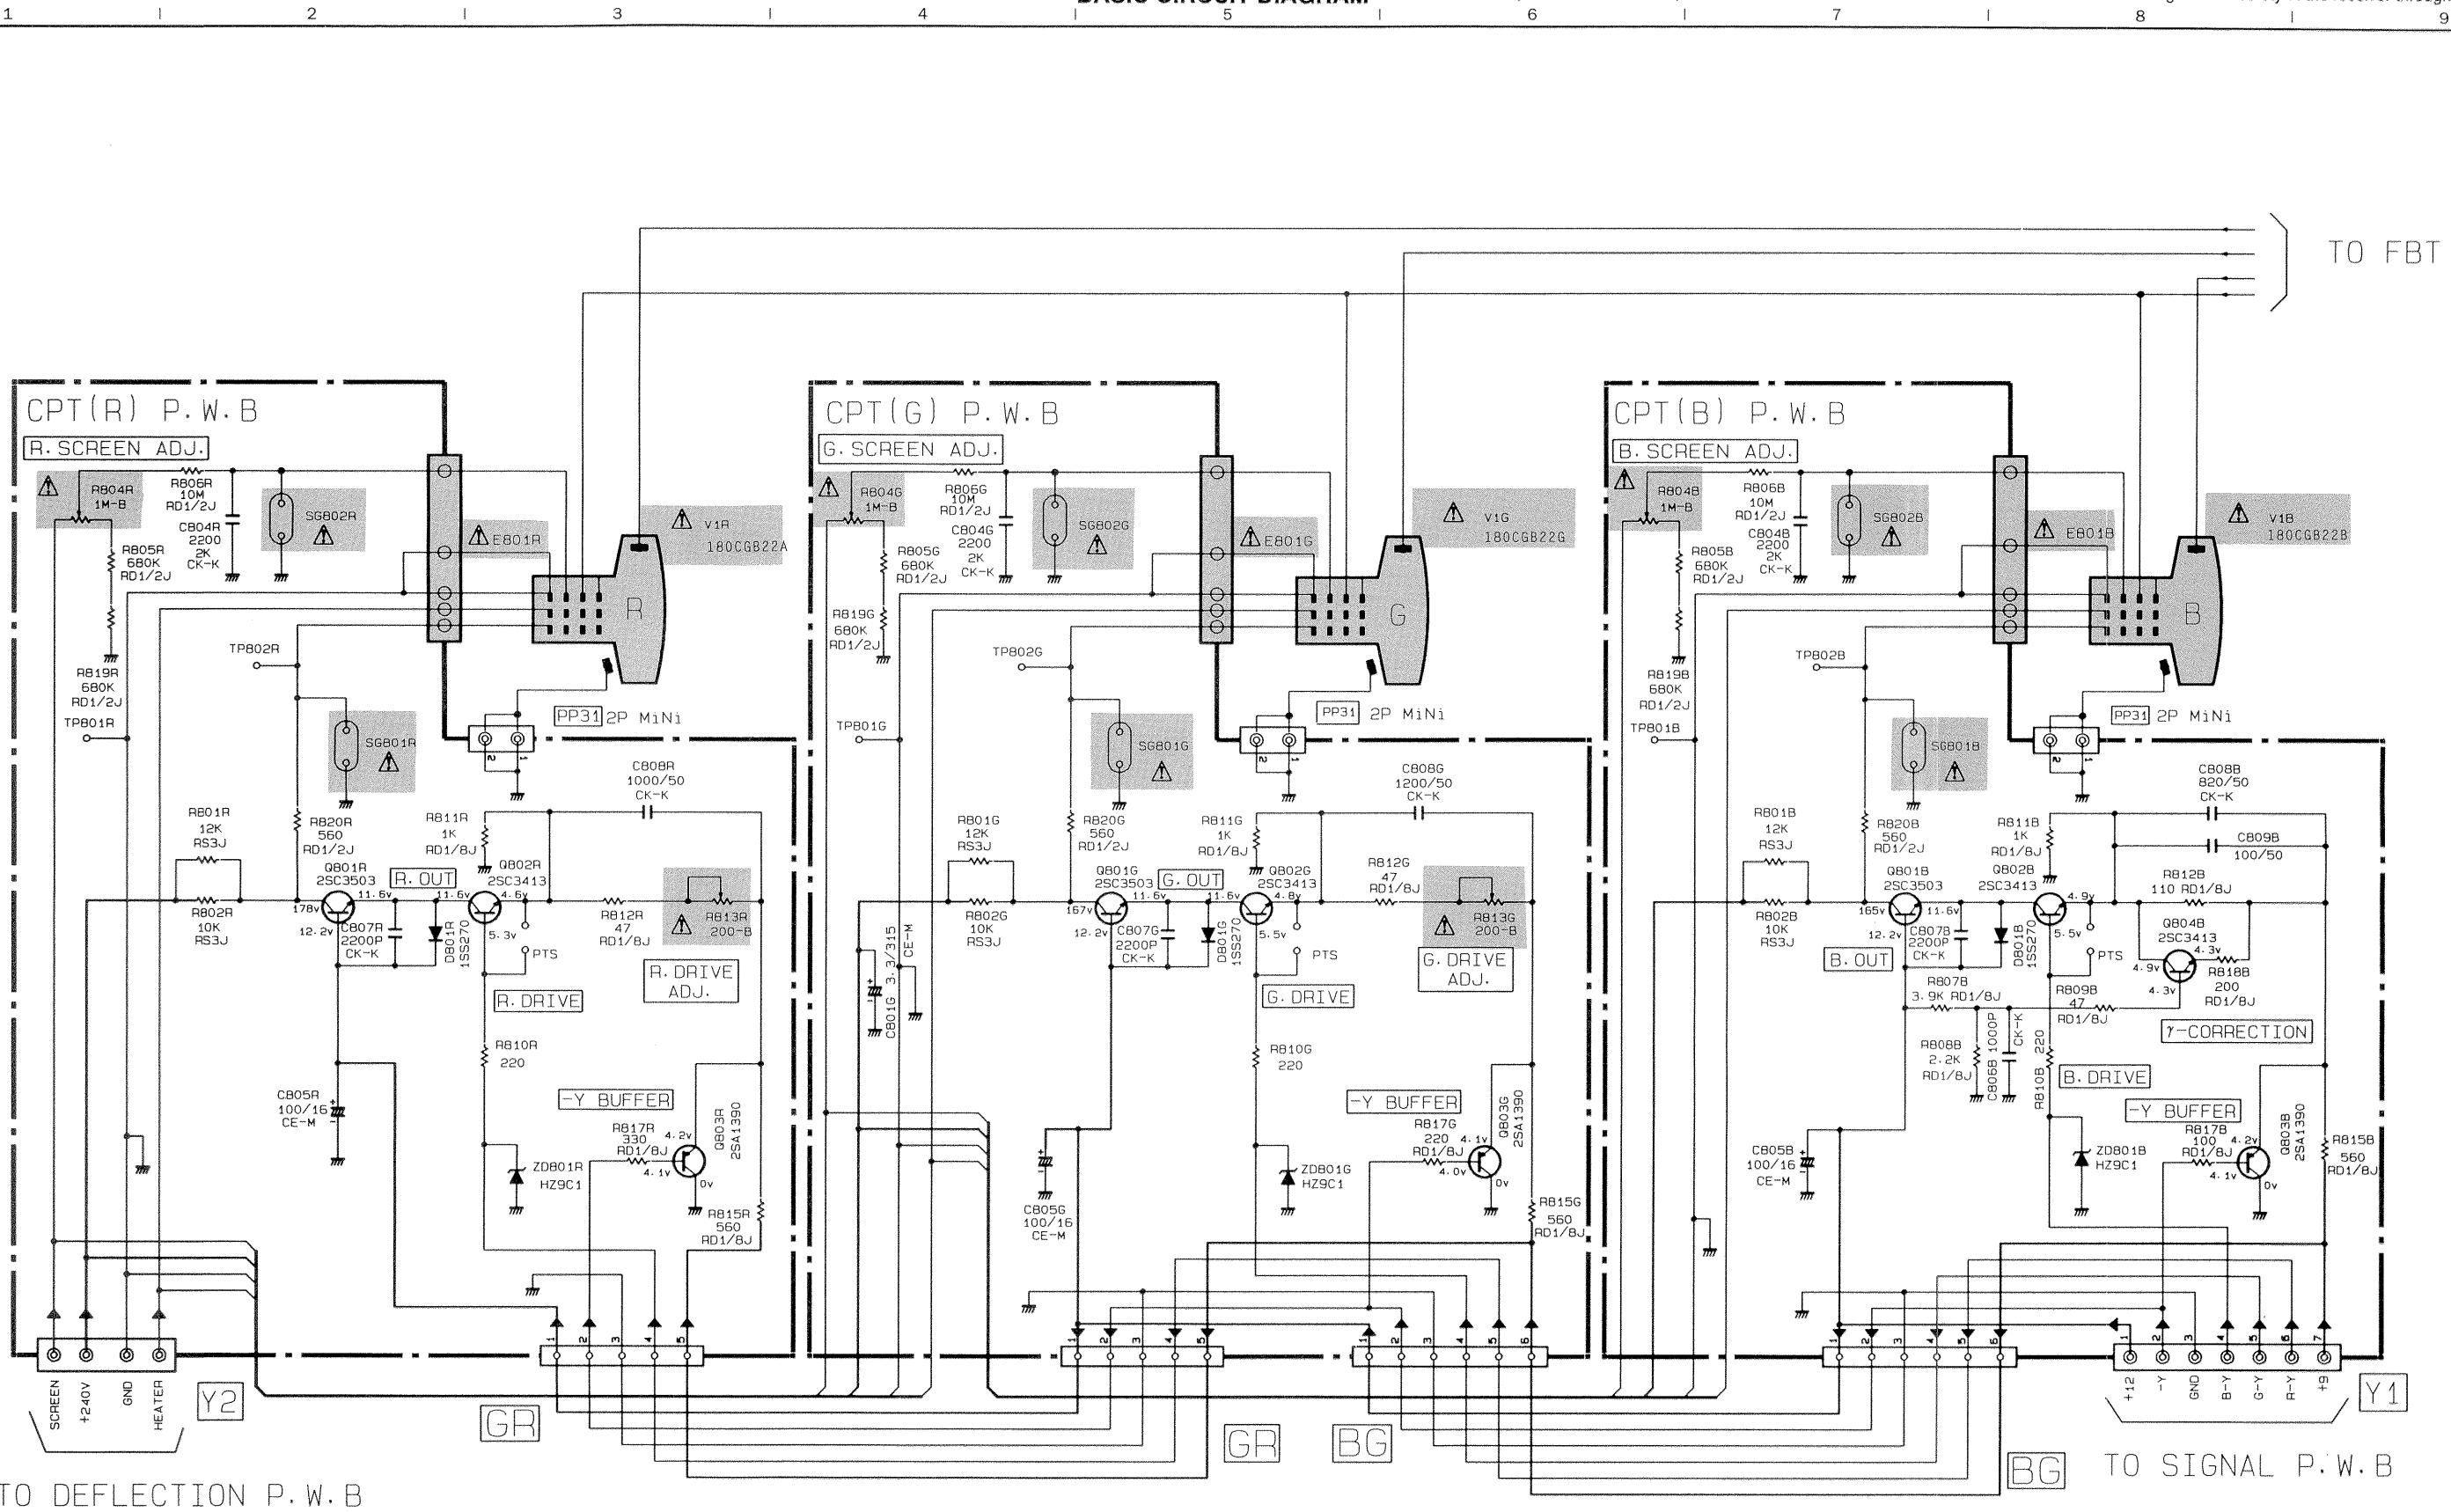


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

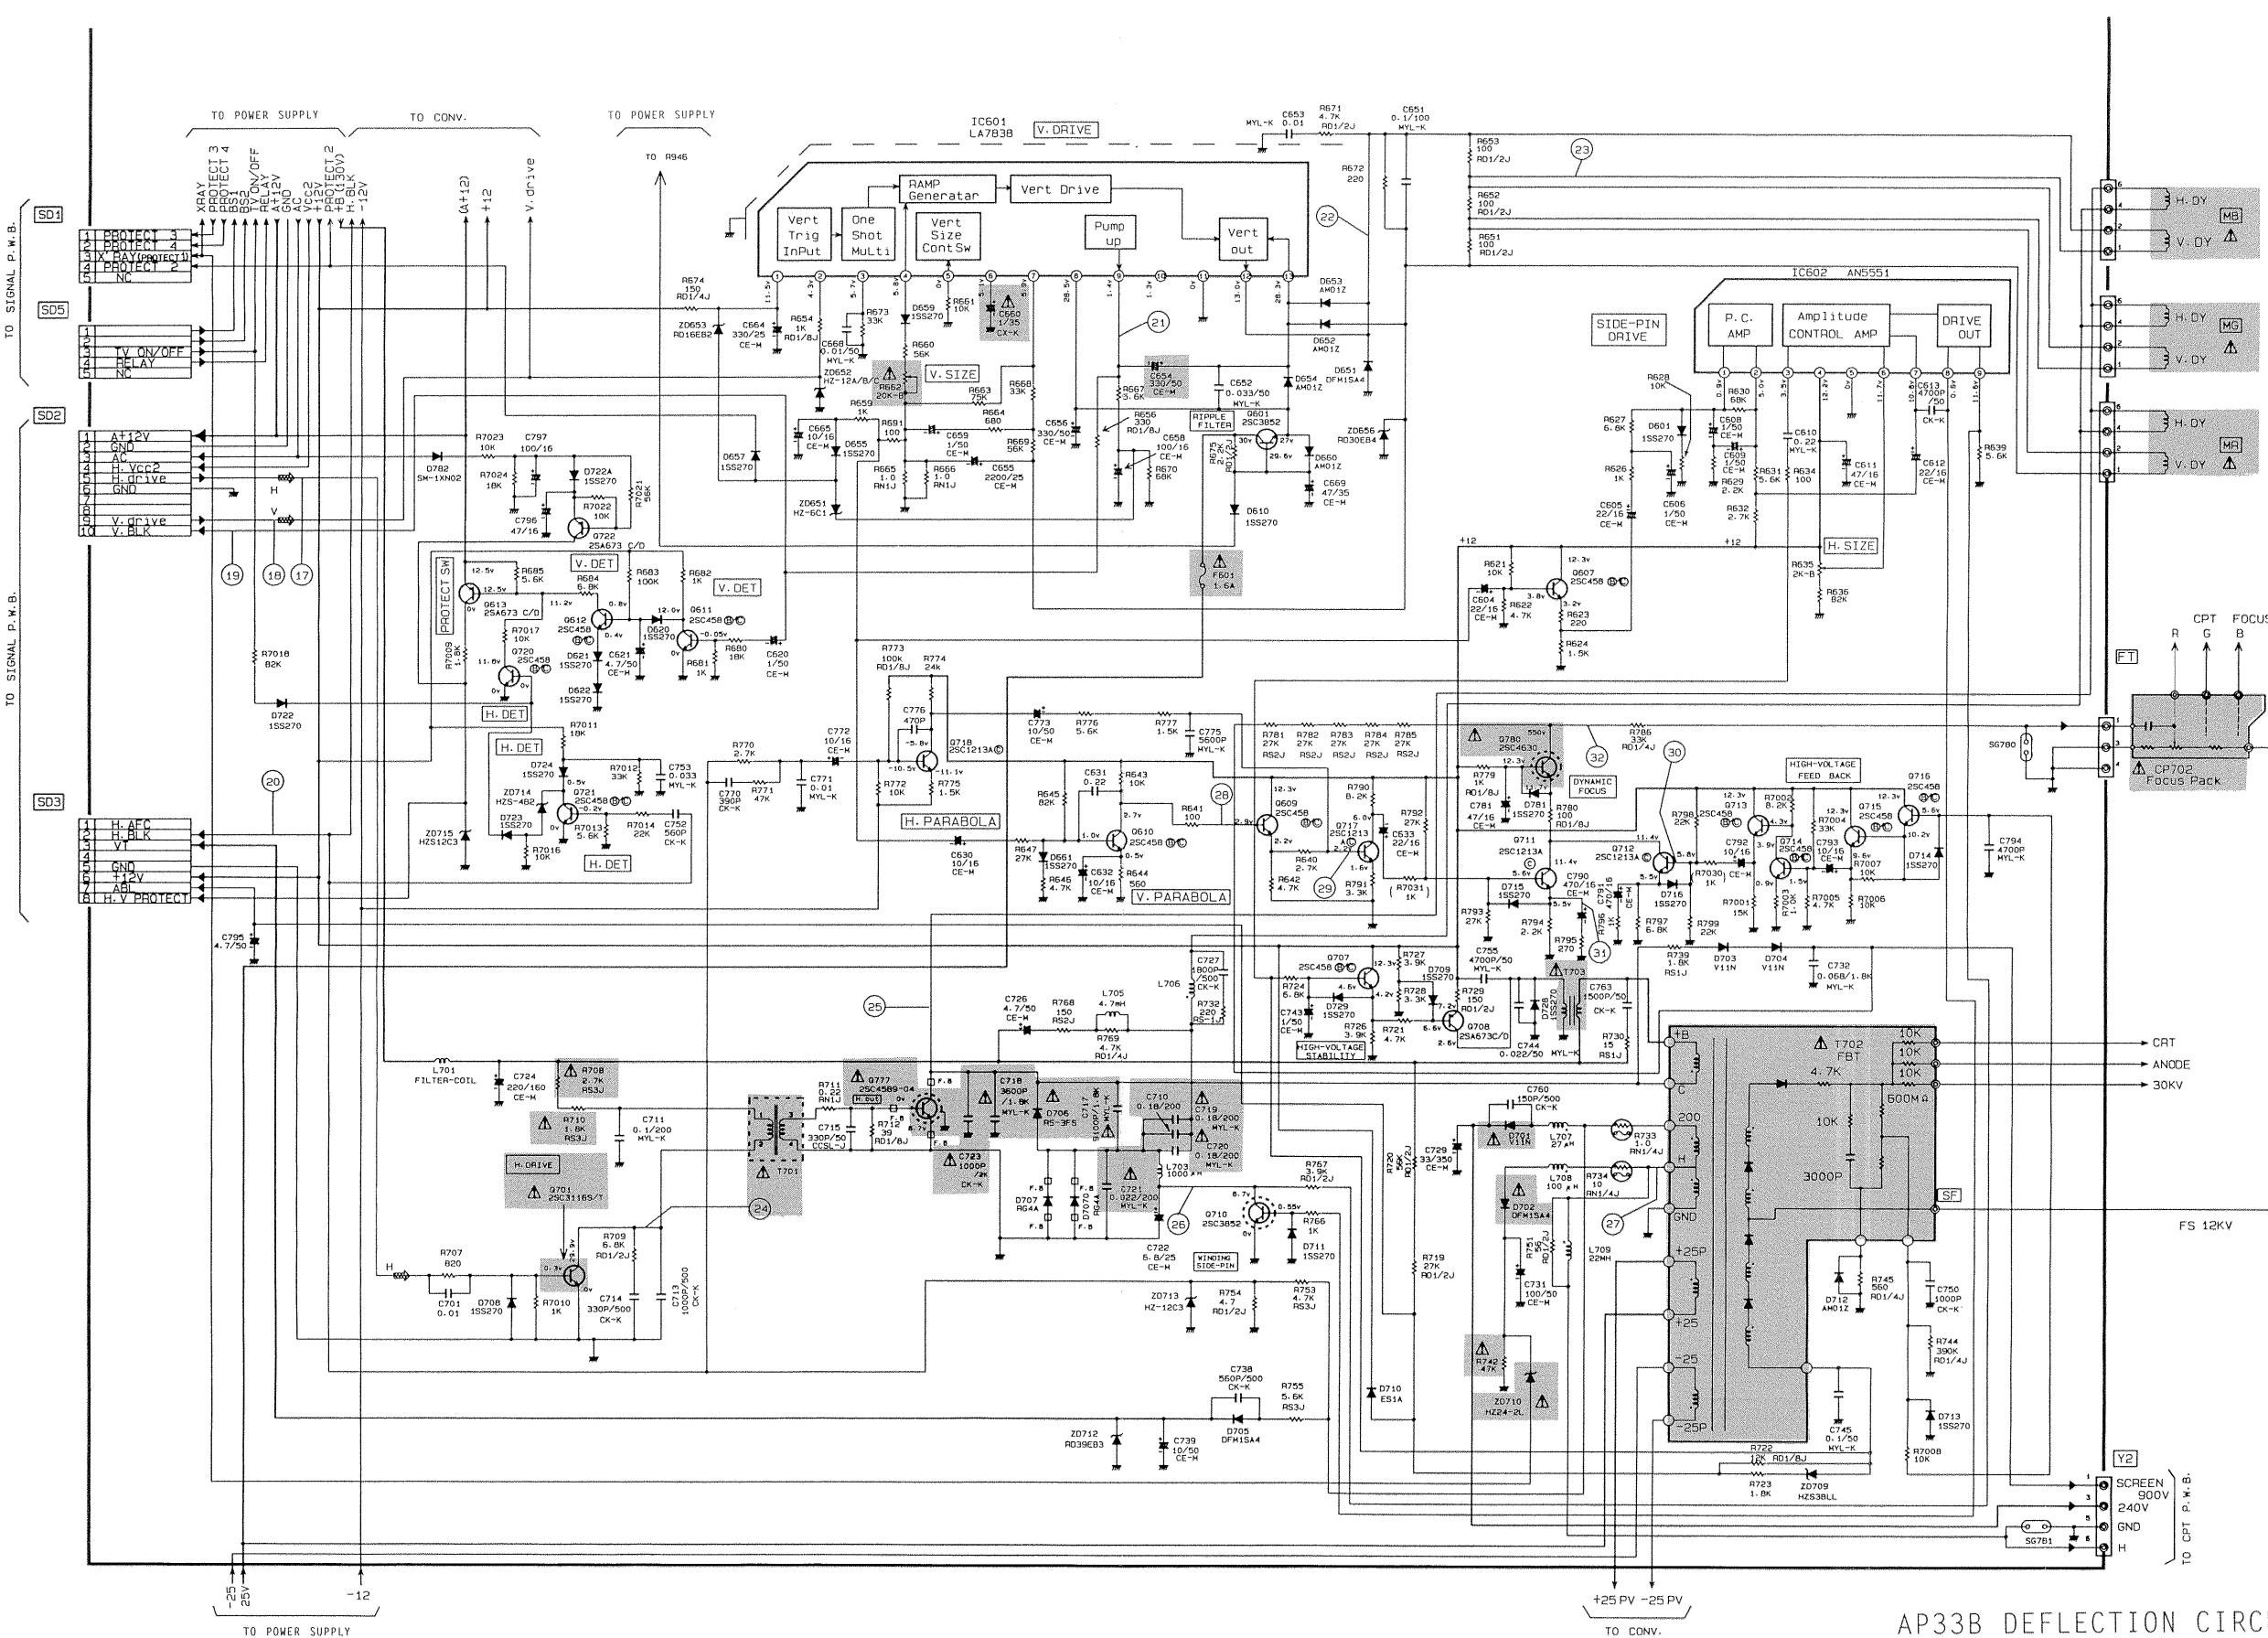


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

## **BASIC CIRCUIT DIAGRAM**

**PRODUCT SAFETY NOTE:** Components marked with a  and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

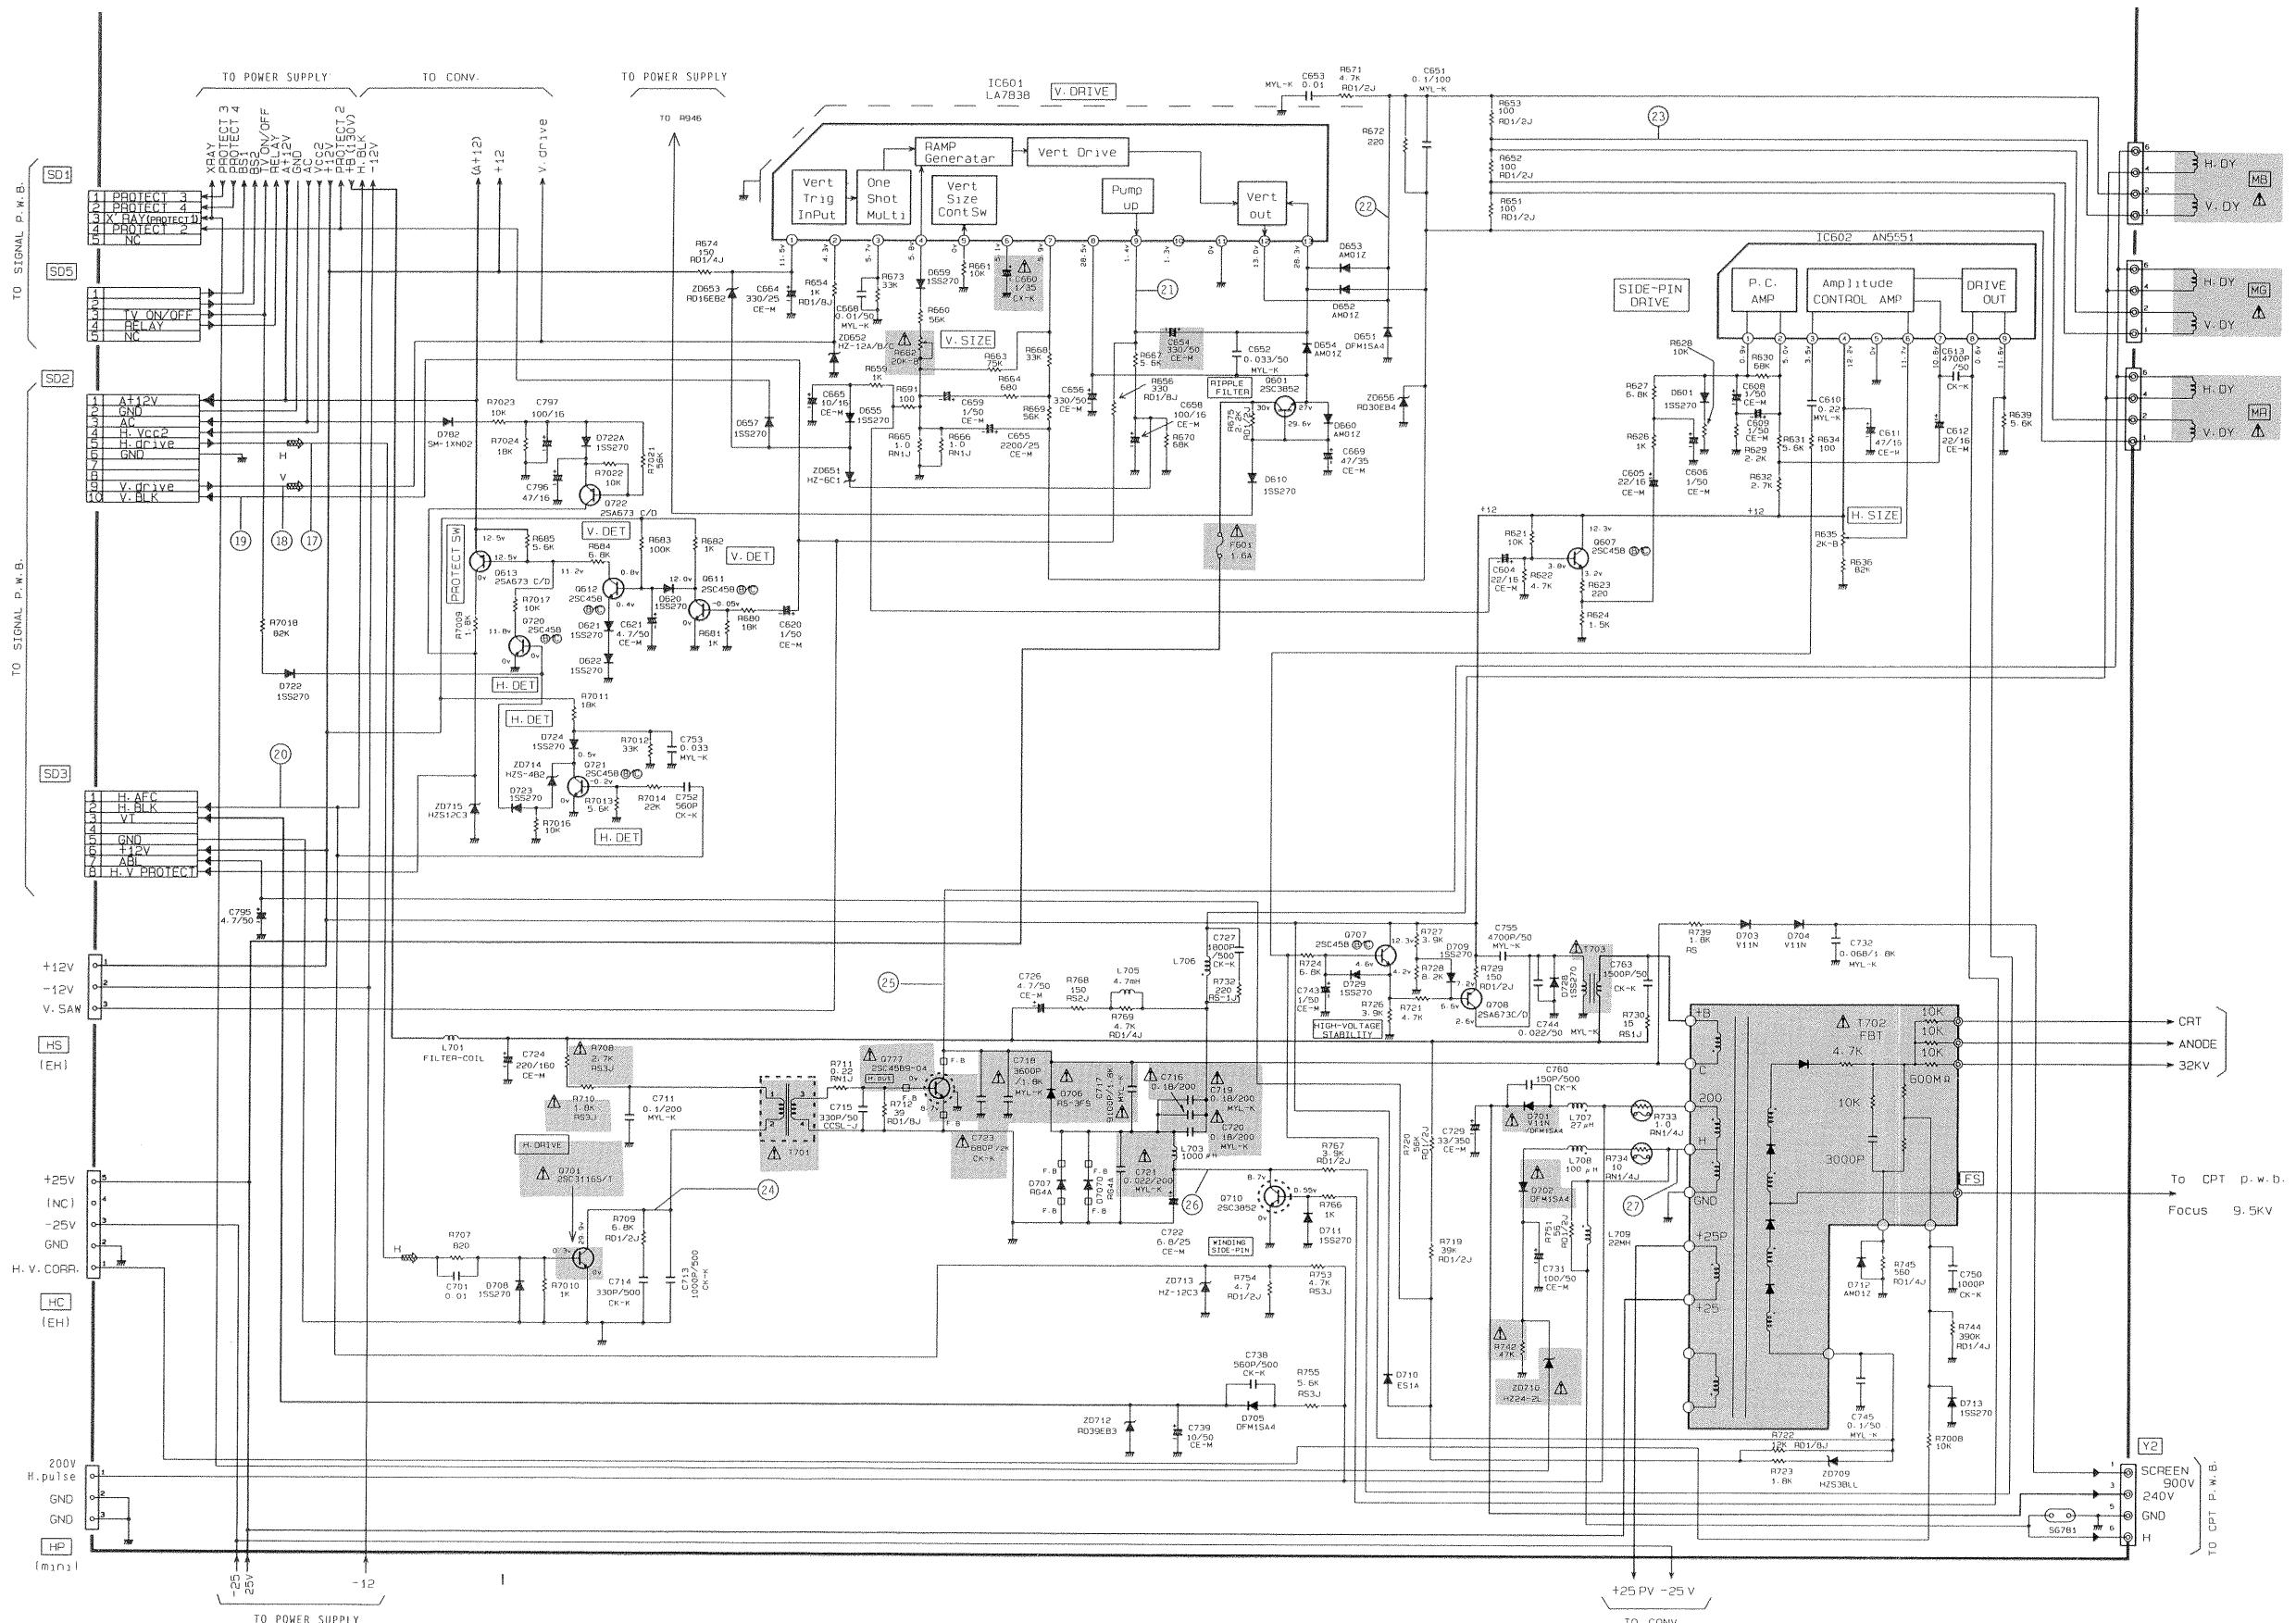


## P34 DEFLECTION CIRCUIT POWER/DEFLECTION P.W.B.)

- Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

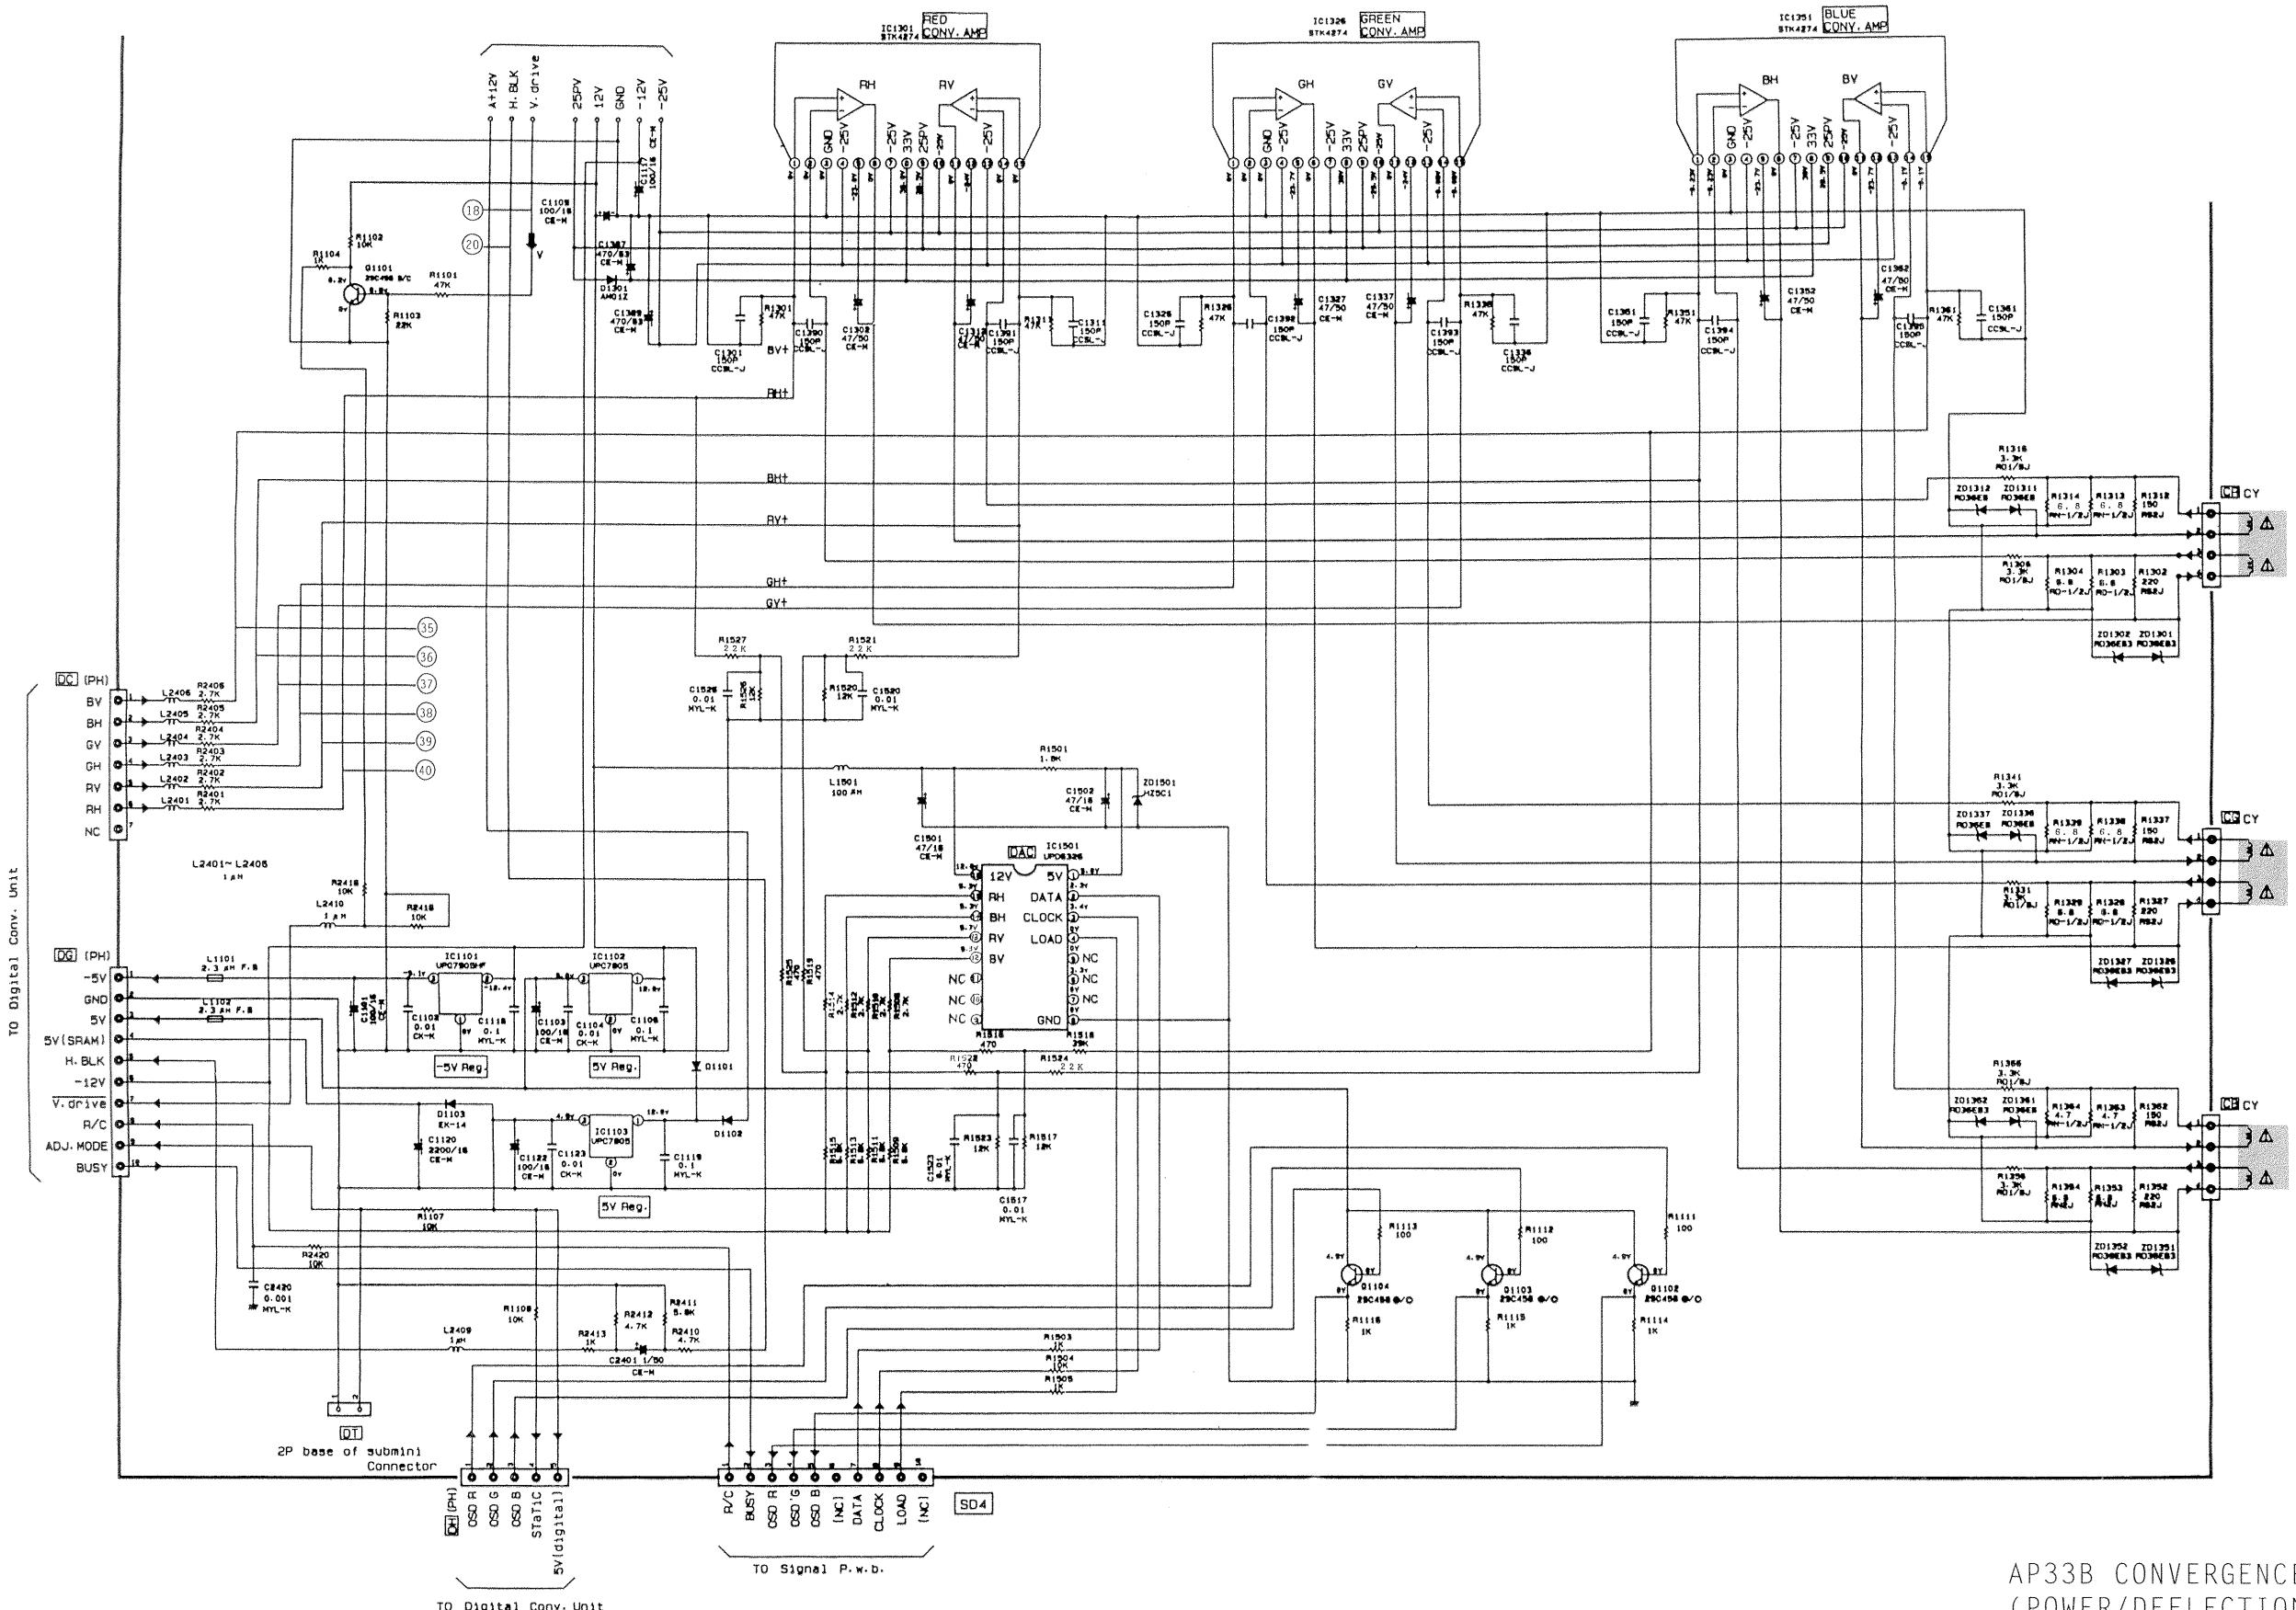


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

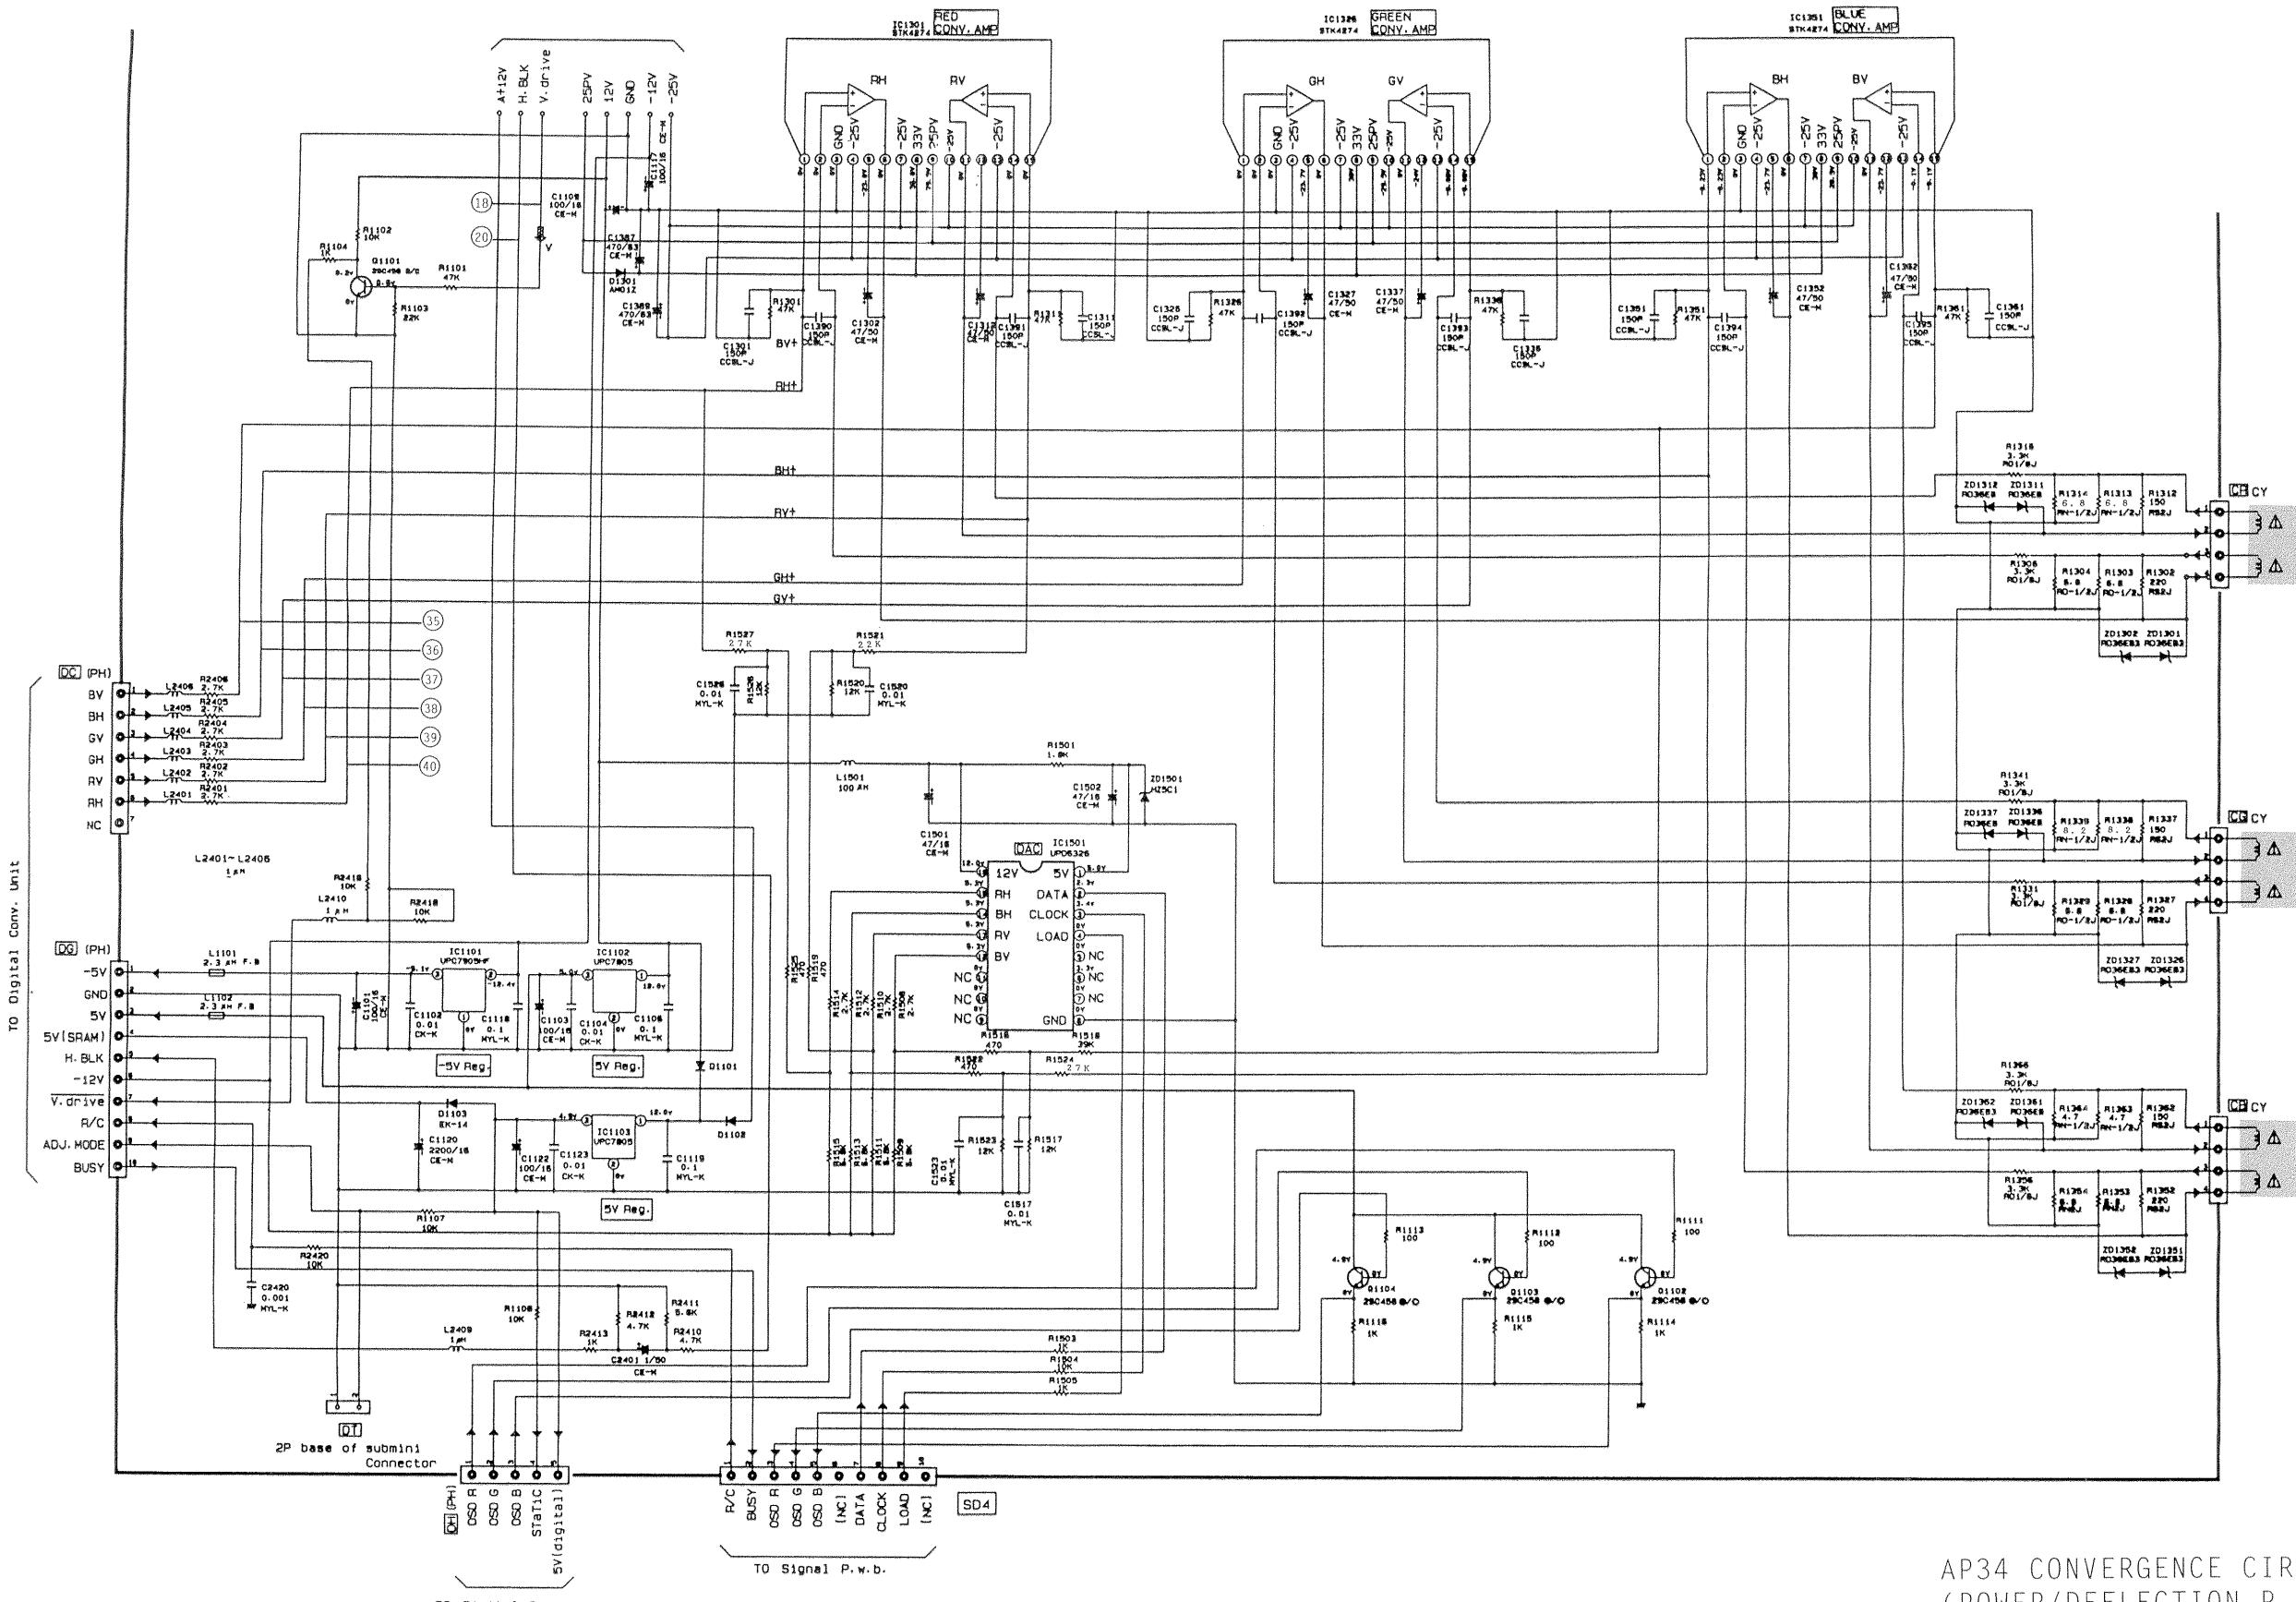


• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

• All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

PRODUCT SAFETY NOTE: Components marked with a and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

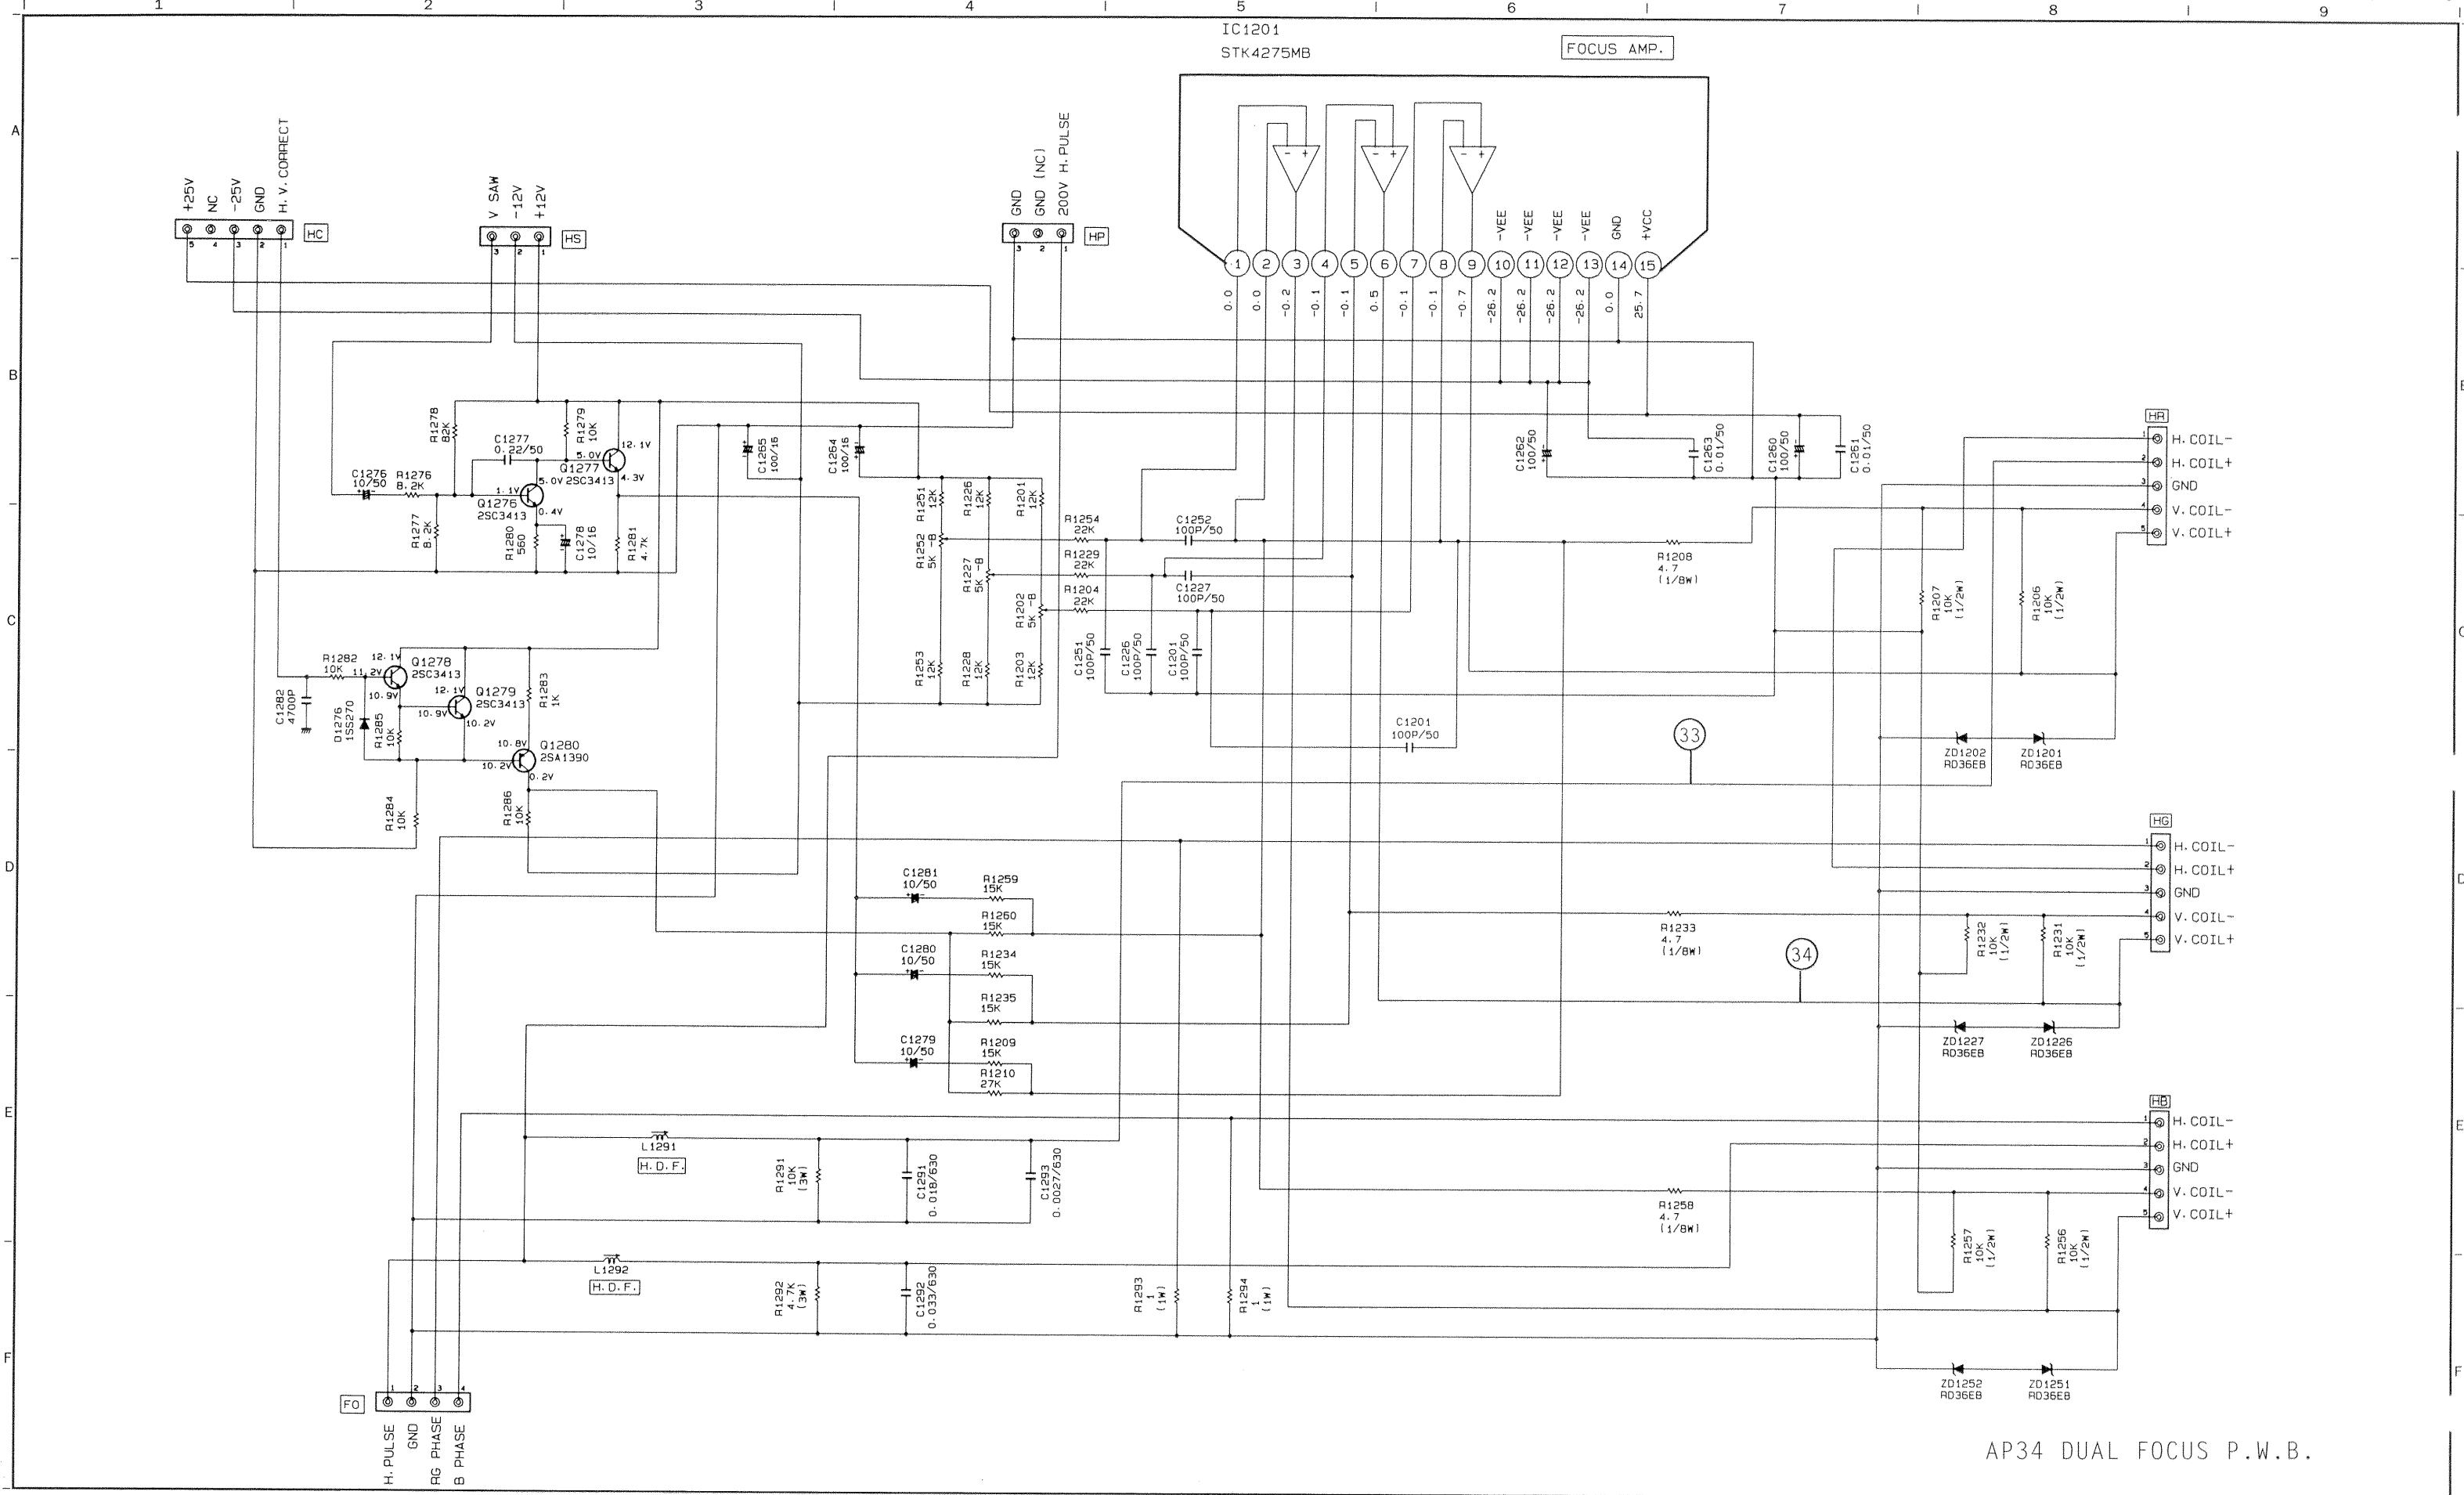


\* Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

\* All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.

# BASIC CIRCUIT DIAGRAM

**PRODUCT SAFETY NOTE:** Components marked with a and shaded have special characteristics important to safety. Before replacing any components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.


Components marked with a and shaded have special characteristics important to safety. Before replacing any components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

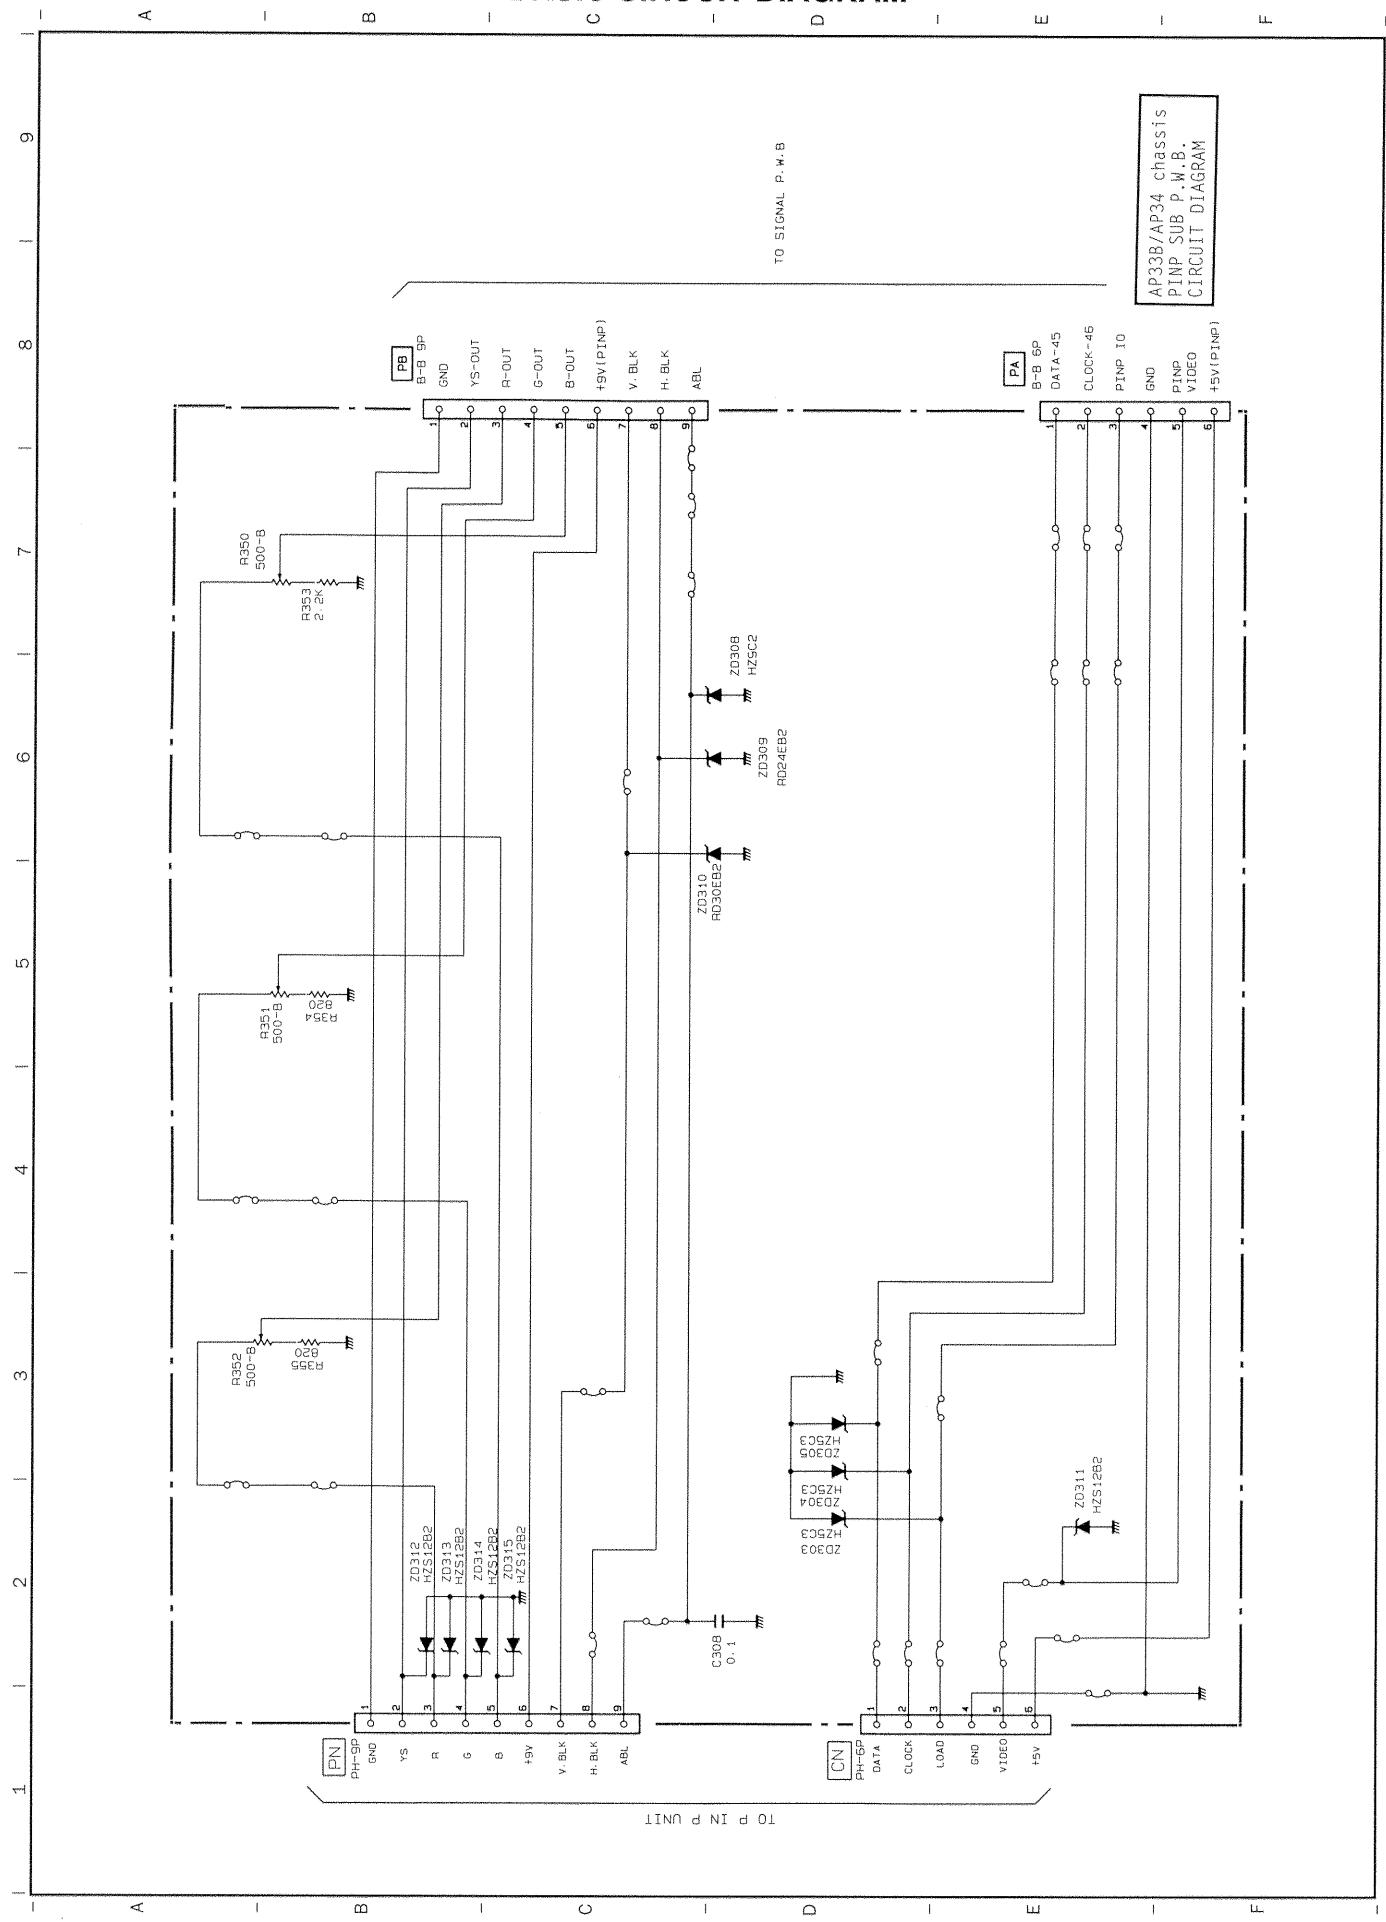

- All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.
- Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

# BASIC CIRCUIT DIAGRAM


**PRODUCT SAFETY NOTE:** Components marked with a  and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

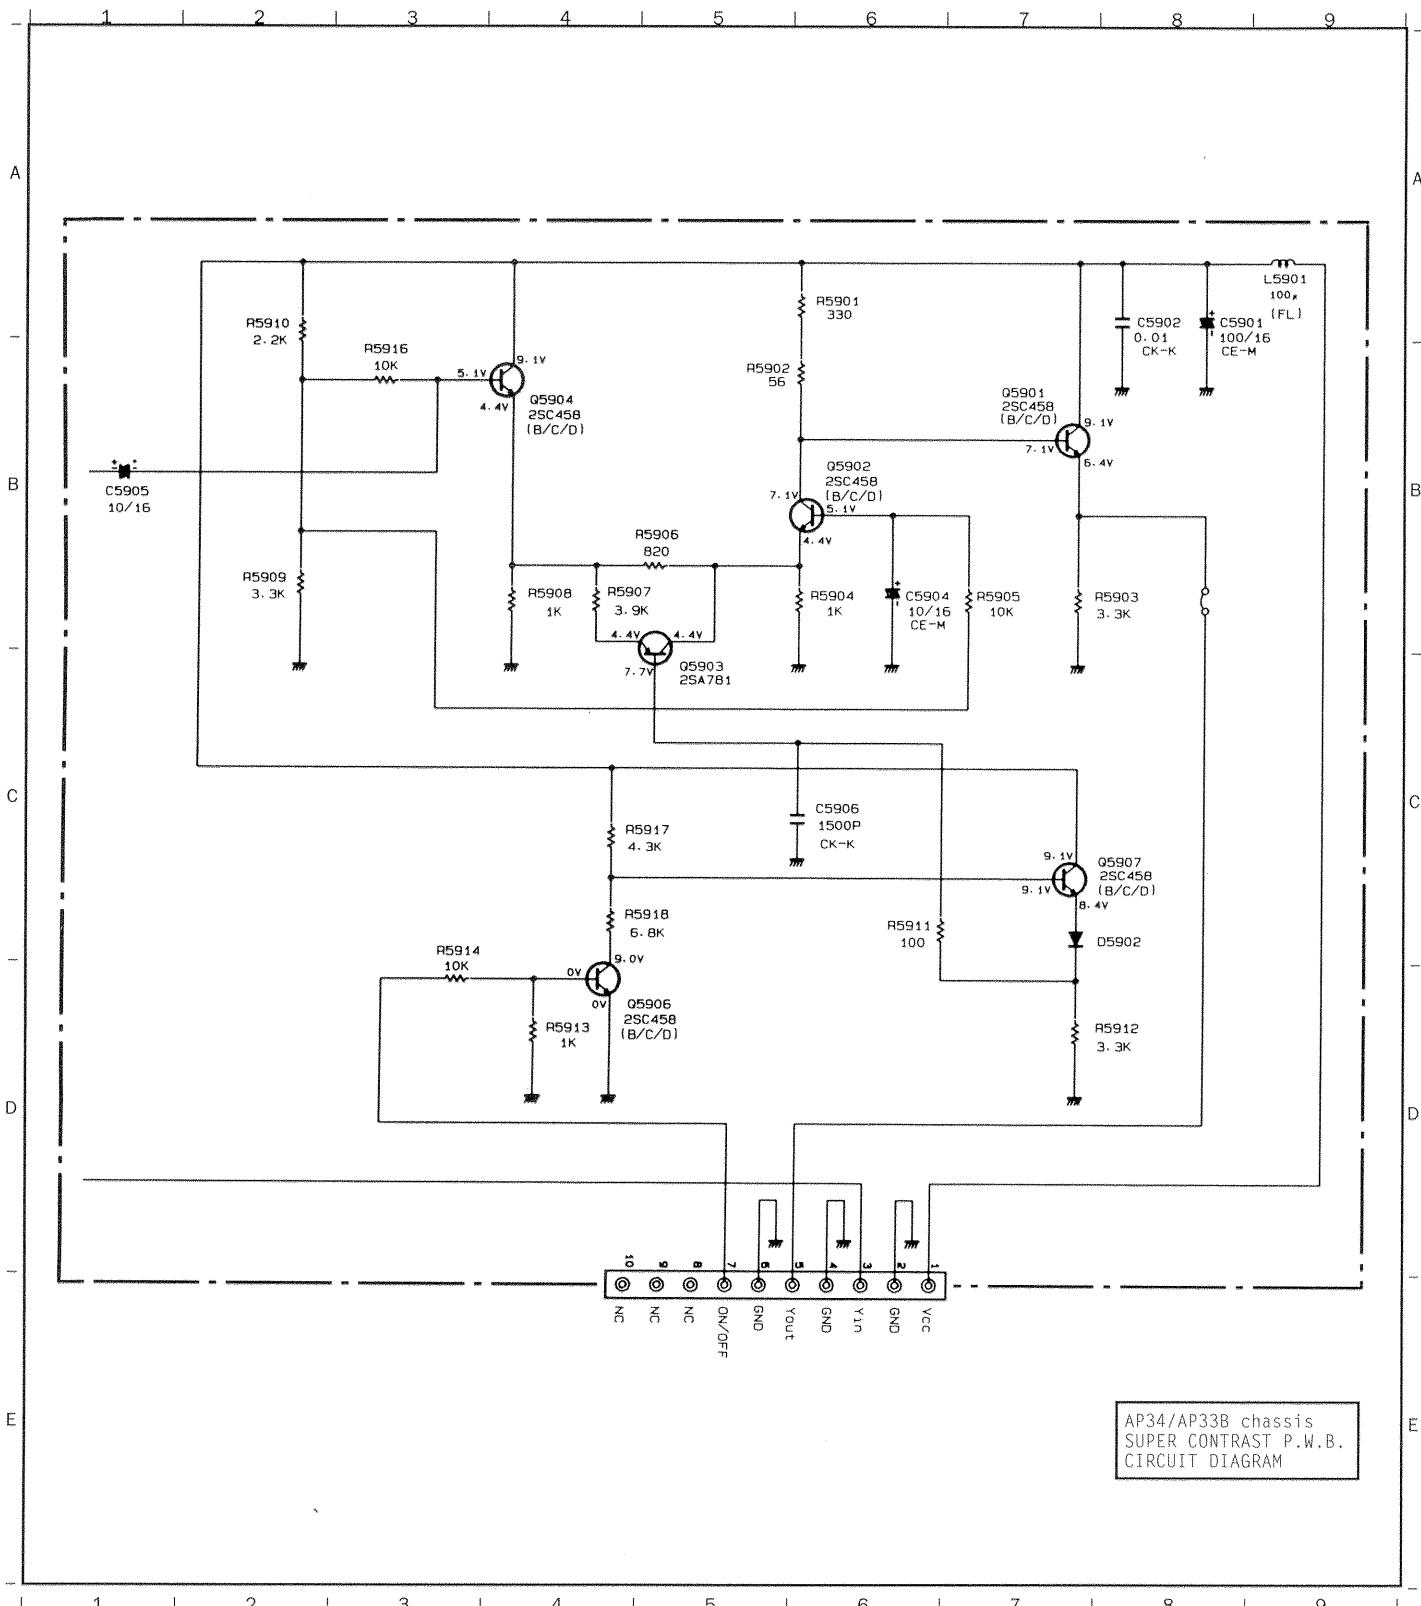

- All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.
- Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

# BASIC CIRCUIT DIAGRAM


**PRODUCT SAFETY NOTE:** Components marked with a  and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

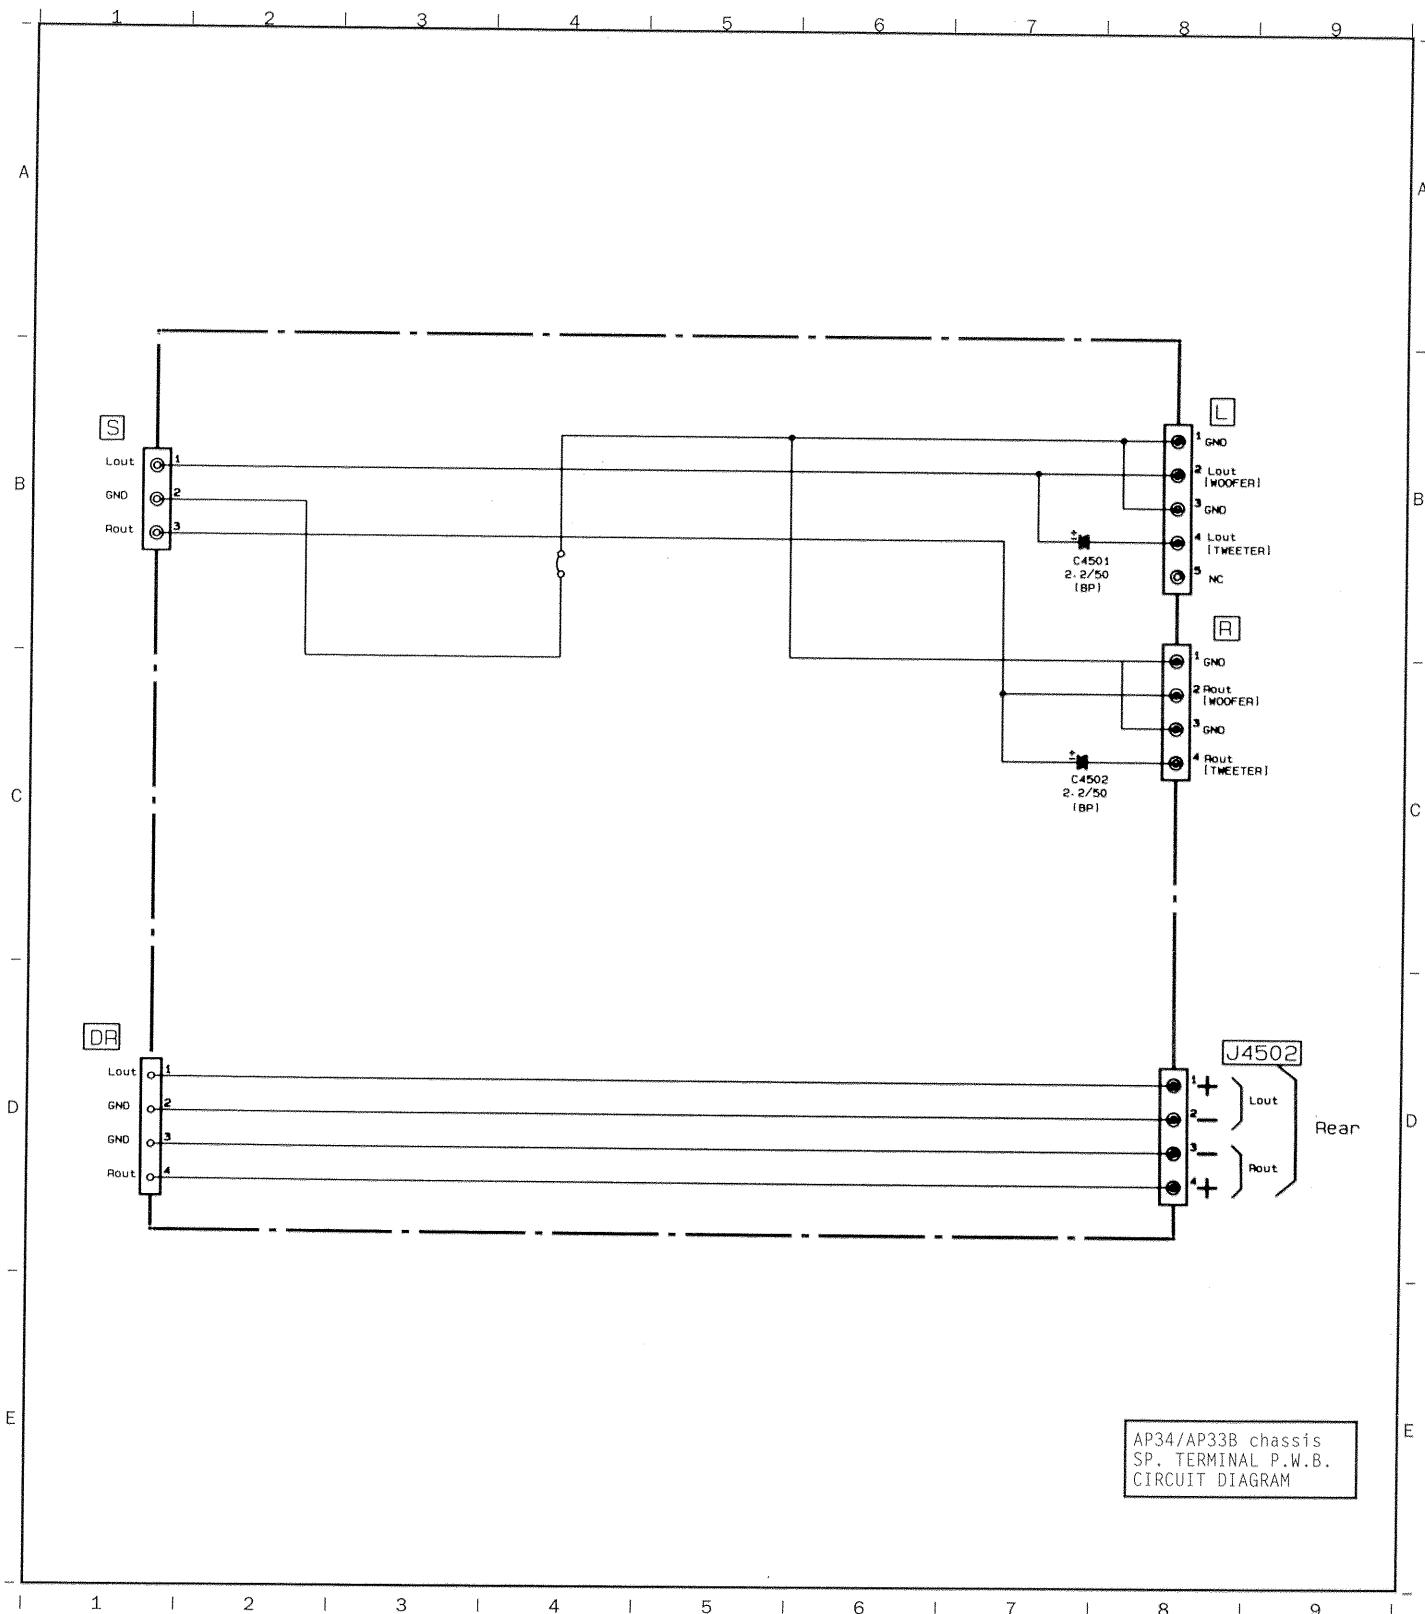

- All DC voltage to be measured with a tester (100kΩ/V). Voltage taken on a complex color bar signal including a standard color bar signal.
- Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.

# WAVEFORMS AT EACH SECTION


① M301 pin 2  
(Video in)

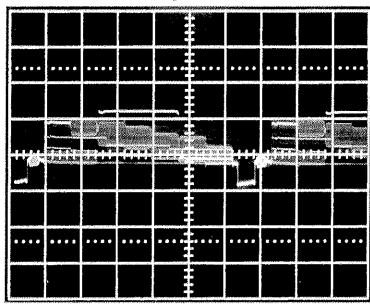

1V/div.  
→ 10μs/div.

← 0V


② M301 pin 6  
(C-out)

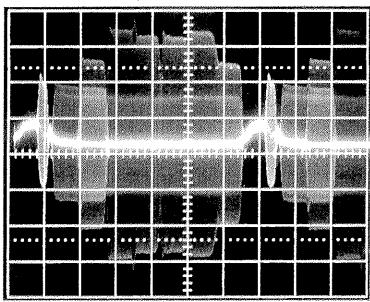

0.1V/div.  
→ 10μs/div.

← 0V


⑥ SC-connector pin 5  
(Super Contrast Y-out)

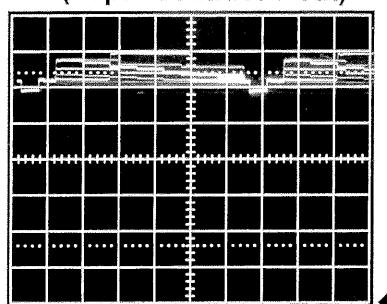

1V/div.  
→ 10μs/div.

← 0V


⑦ Q3504 emitter  
(C-buffer)

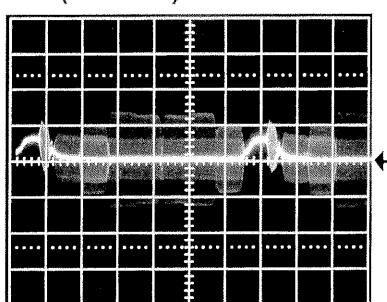

0.1V/div.  
→ 10μs/div.

← +3.7V


③ M301 pin 11  
(Y-out)

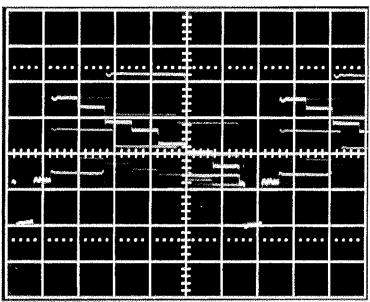

0.5V/div.  
→ 10μs/div.

← 0V


⑧ IC5501 pin 16  
(GTX in, PinP on)

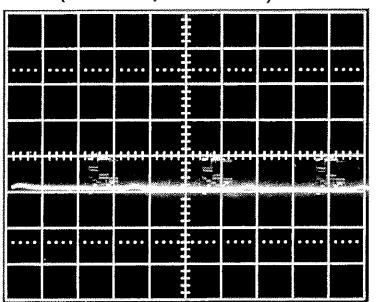

1V/div.  
→ 20μs/div.

← 0V


④ M301 pin 4  
(YCE-out)

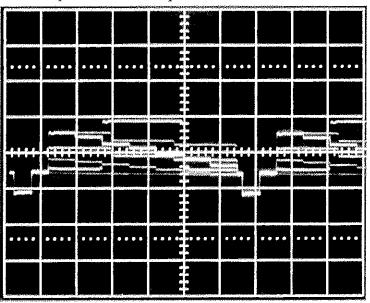

1V/div.  
→ 10μs/div.

← 0V


⑨ IC5501 pin 18  
(Ys-PinP with H.Blk. reference)

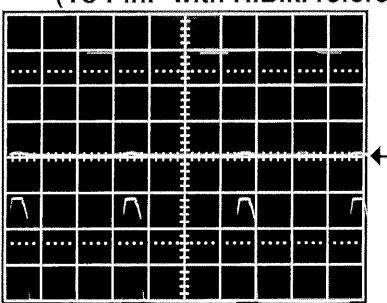

1V/div.  
→ 20μs/div.

← 0V


⑤ Q3503 Emitter  
(Y-buffer)

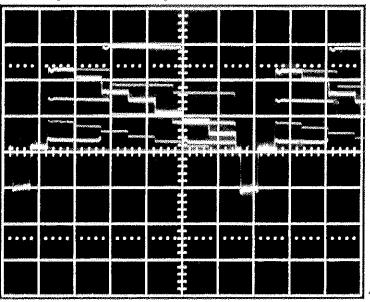

0.5V/div.  
→ 10μs/div.

← 0V

⑩ IC5501 pin 55  
(Y-in)

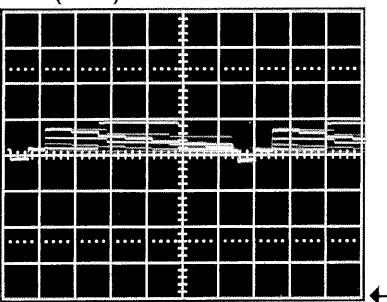


1V/div.  
→ 10μs/div.


← 0V

# WAVEFORMS AT EACH SECTION


⑪ IC5501 pin 13  
(-Y out)

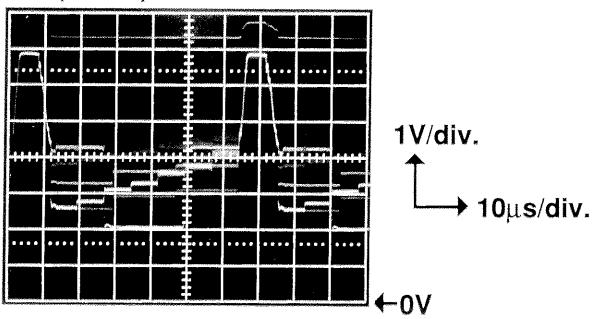


⑫ IC5501 pin 26  
(H-out)

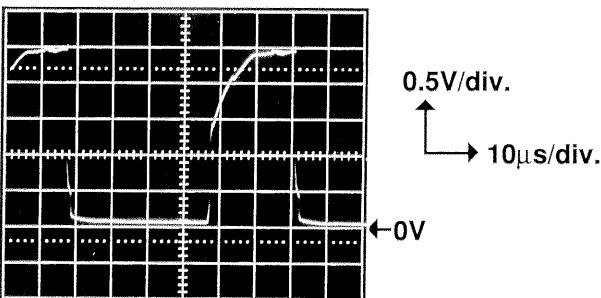


⑬ IC5501 pin 25  
(FB Pin)

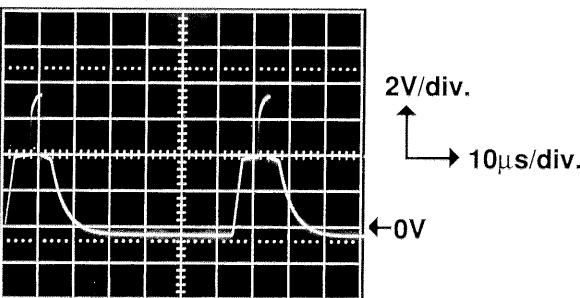


⑭ IC5501 pin 32  
(V out)

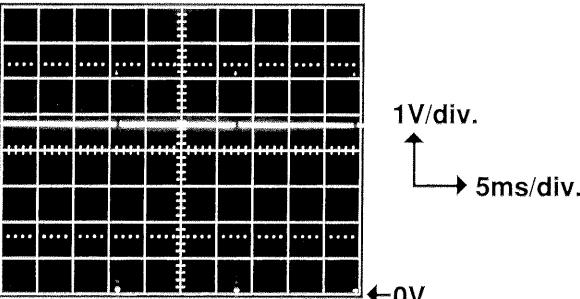


⑮ IC5501 pin 11  
(G-Y out)

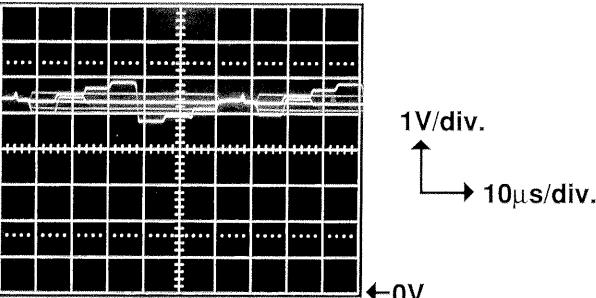


⑯ IC901 pin 1  
(Switching Regulator Output)

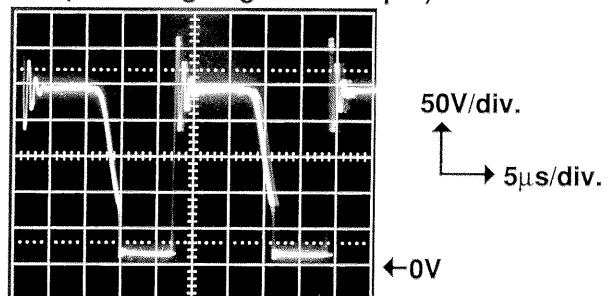


⑰ SD2 connector pin 5  
(H. Drive)

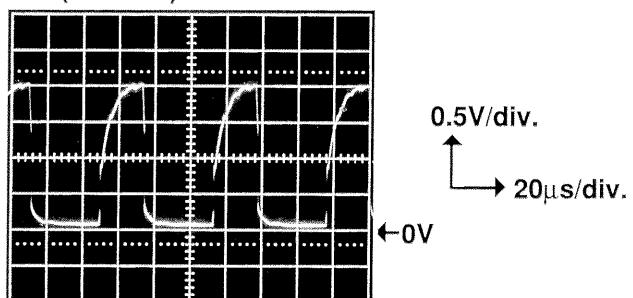


⑱ SD2 connector pin 9  
(V. Drive)

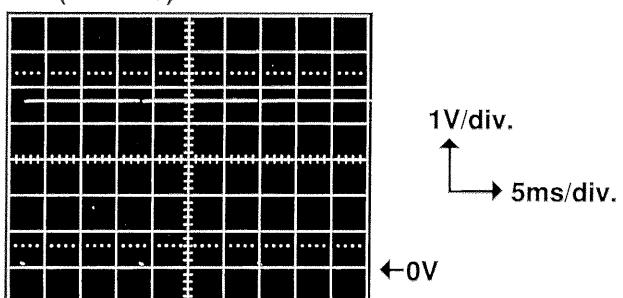

⑲ SD2 connector pin 10  
(V. Blanking)

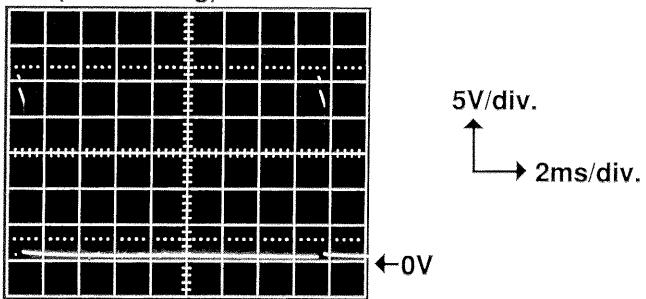


⑳ SD3 connector pin 2  
(H. Blanking)

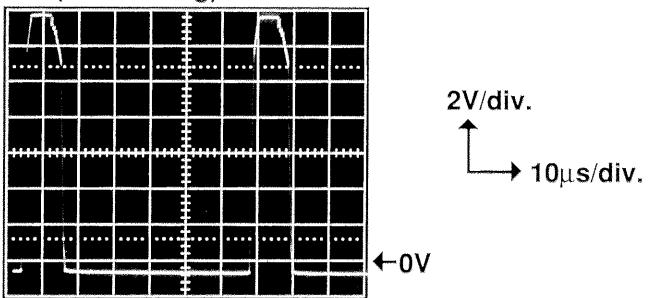


# WAVEFORMS AT EACH SECTION


**(21) IC601 pin 9  
(V. pump-up)**

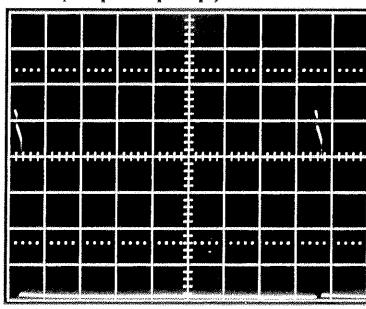


**(22) IC601 pin 12  
(V.-out)**

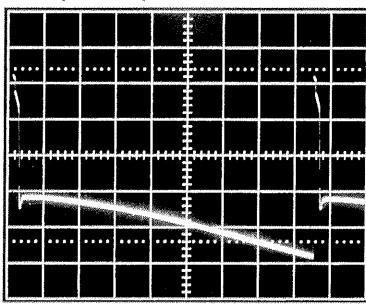


**(23) MB-connector pin 1  
(V.DY-Blue)**

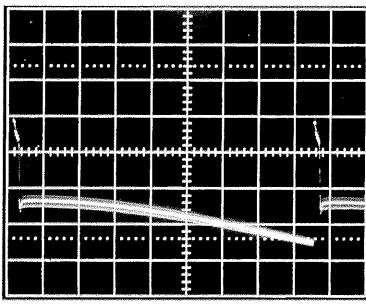


**(24) Q701 Collector  
(H. Drive)**

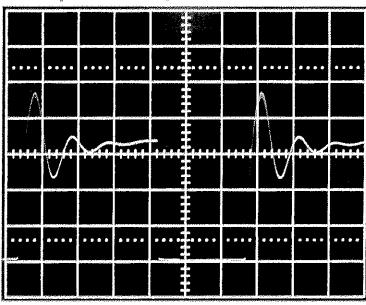


**(25) Q777 Collector  
(H. Output)**

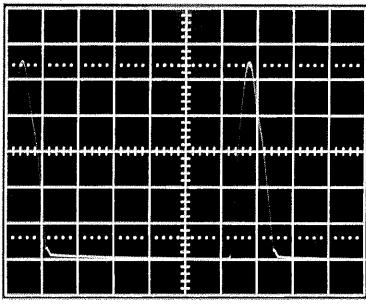


**(26) Q710 Collector**

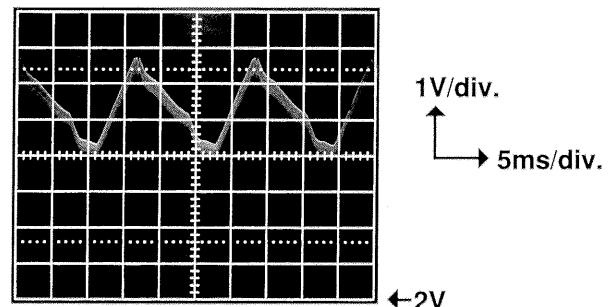


**(27) FBT pin H  
(CPT Heater)**

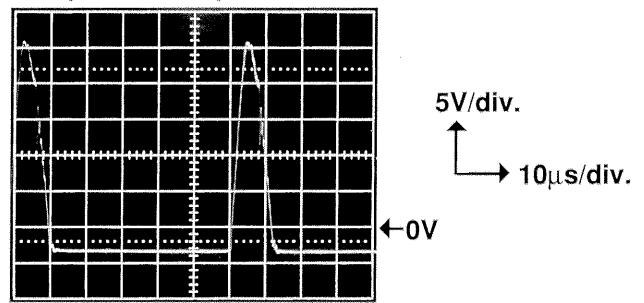


**(28) Q609 Base (AP33B Only)**

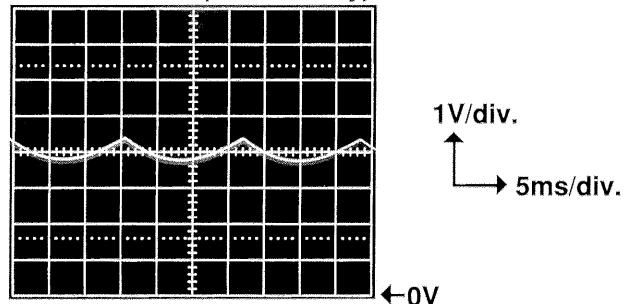

**(29) Q717 Base (AP33B Only)**

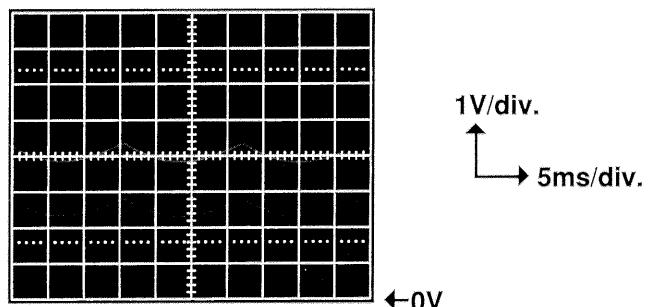


**(30) Q712 Base (AP33B Only)**

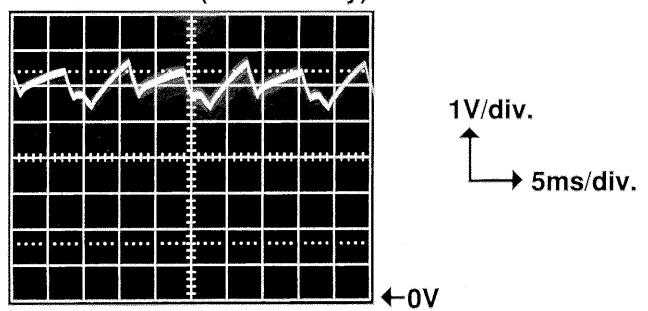


# WAVEFORMS AT EACH SECTION


③① Q711 Emitter (AP33B Only)

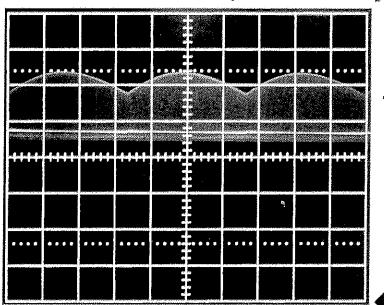


③② Q780 Collector (AP33B Only)  
(Dynamic Focus)

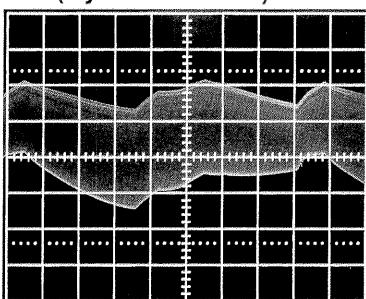


③③ HR connector pin 2  
(AP34 Only)

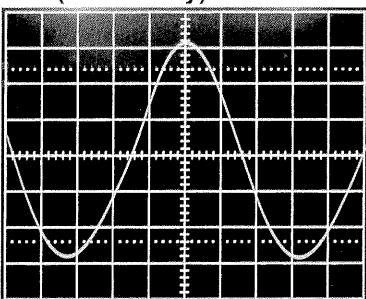


③④ HG connector pin 5  
(AP34 Only)

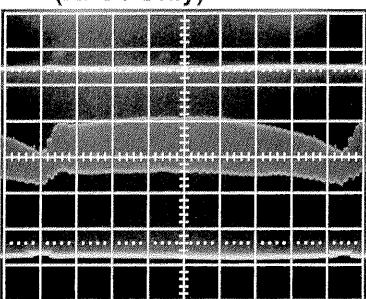


③⑤ IC1351 pin 15  
(BV+)

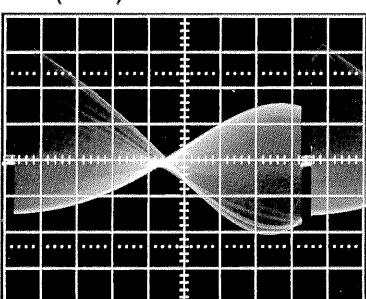


③⑥ IC1351 pin 1  
(BH+)

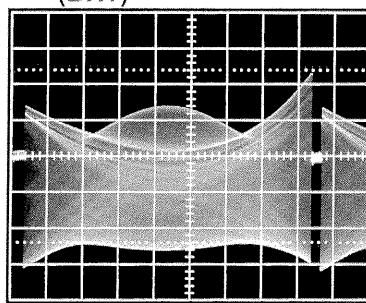


③⑦ IC1326 pin 15  
(GV+)

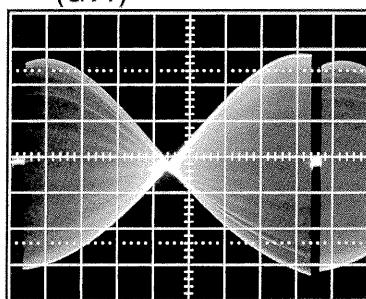


③⑧ IC1326 pin 1  
(GH+)

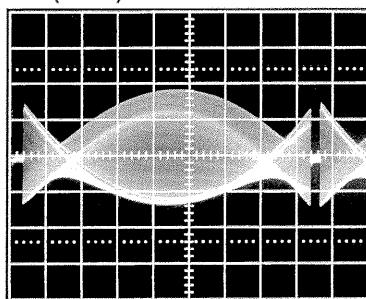

③⑨ IC1301 pin 15  
(RV+)

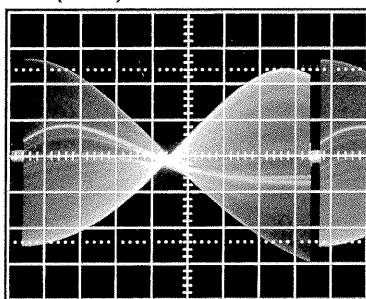


③⑩ IC1301 pin 1  
(RH+)

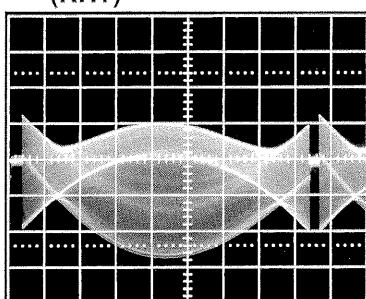


## PRINTED CIRCUIT BOARD


**P IN P SUB P.C.B.**

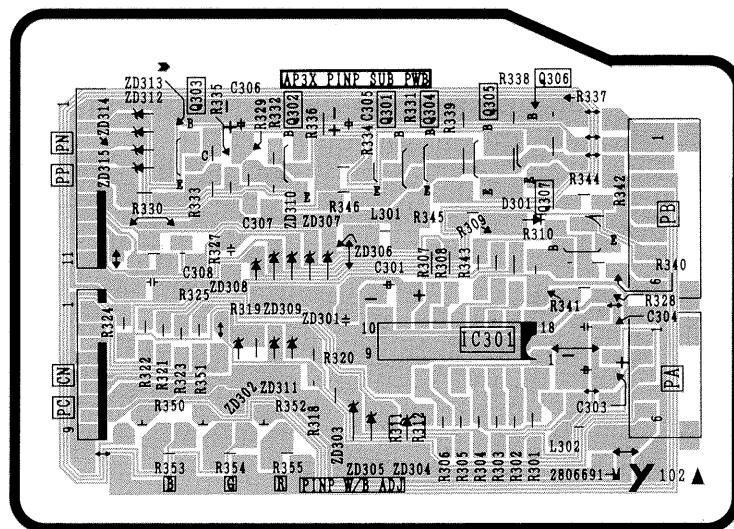

**SUPER CONTRAST P.C.B.**

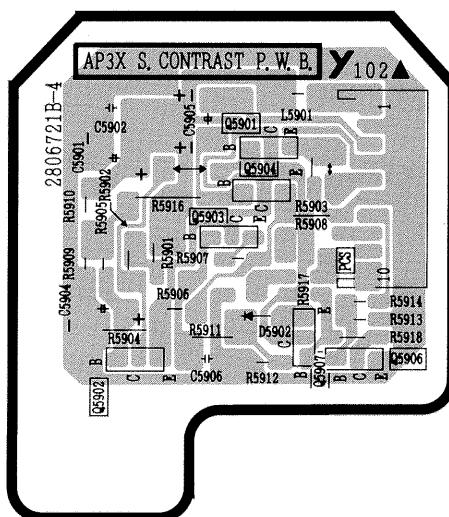


## SPEAKER TERMINAL P.C.B.

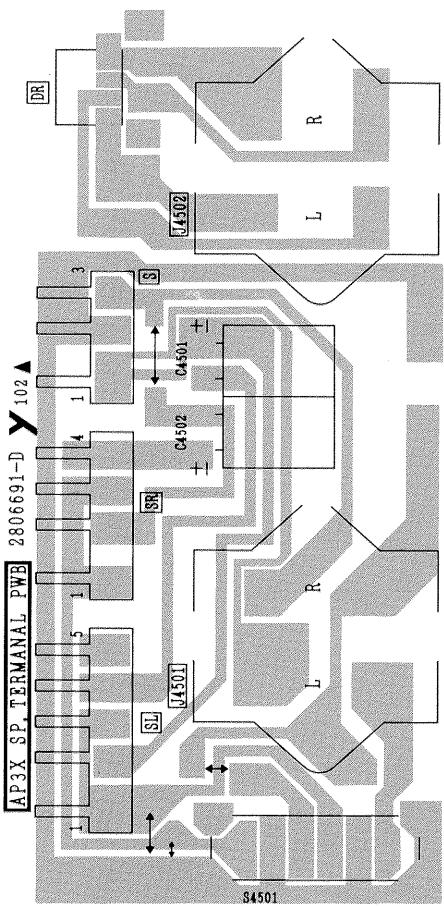


V CUT 4

CONTROL P.C.B.

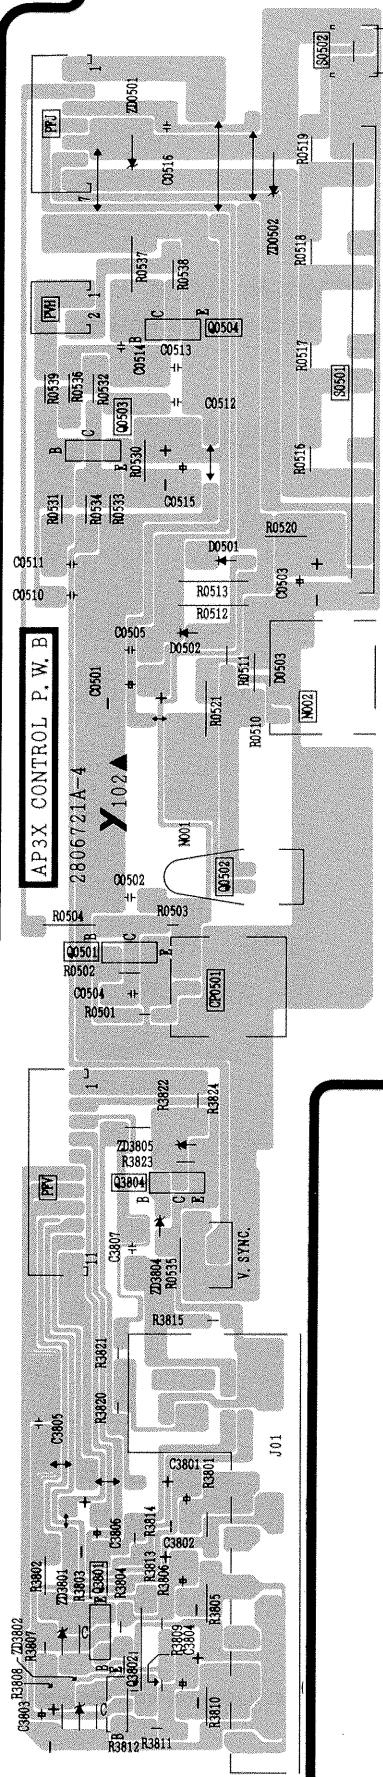

# PRINTED CIRCUIT BOARD


## TERMINAL P.C.B.

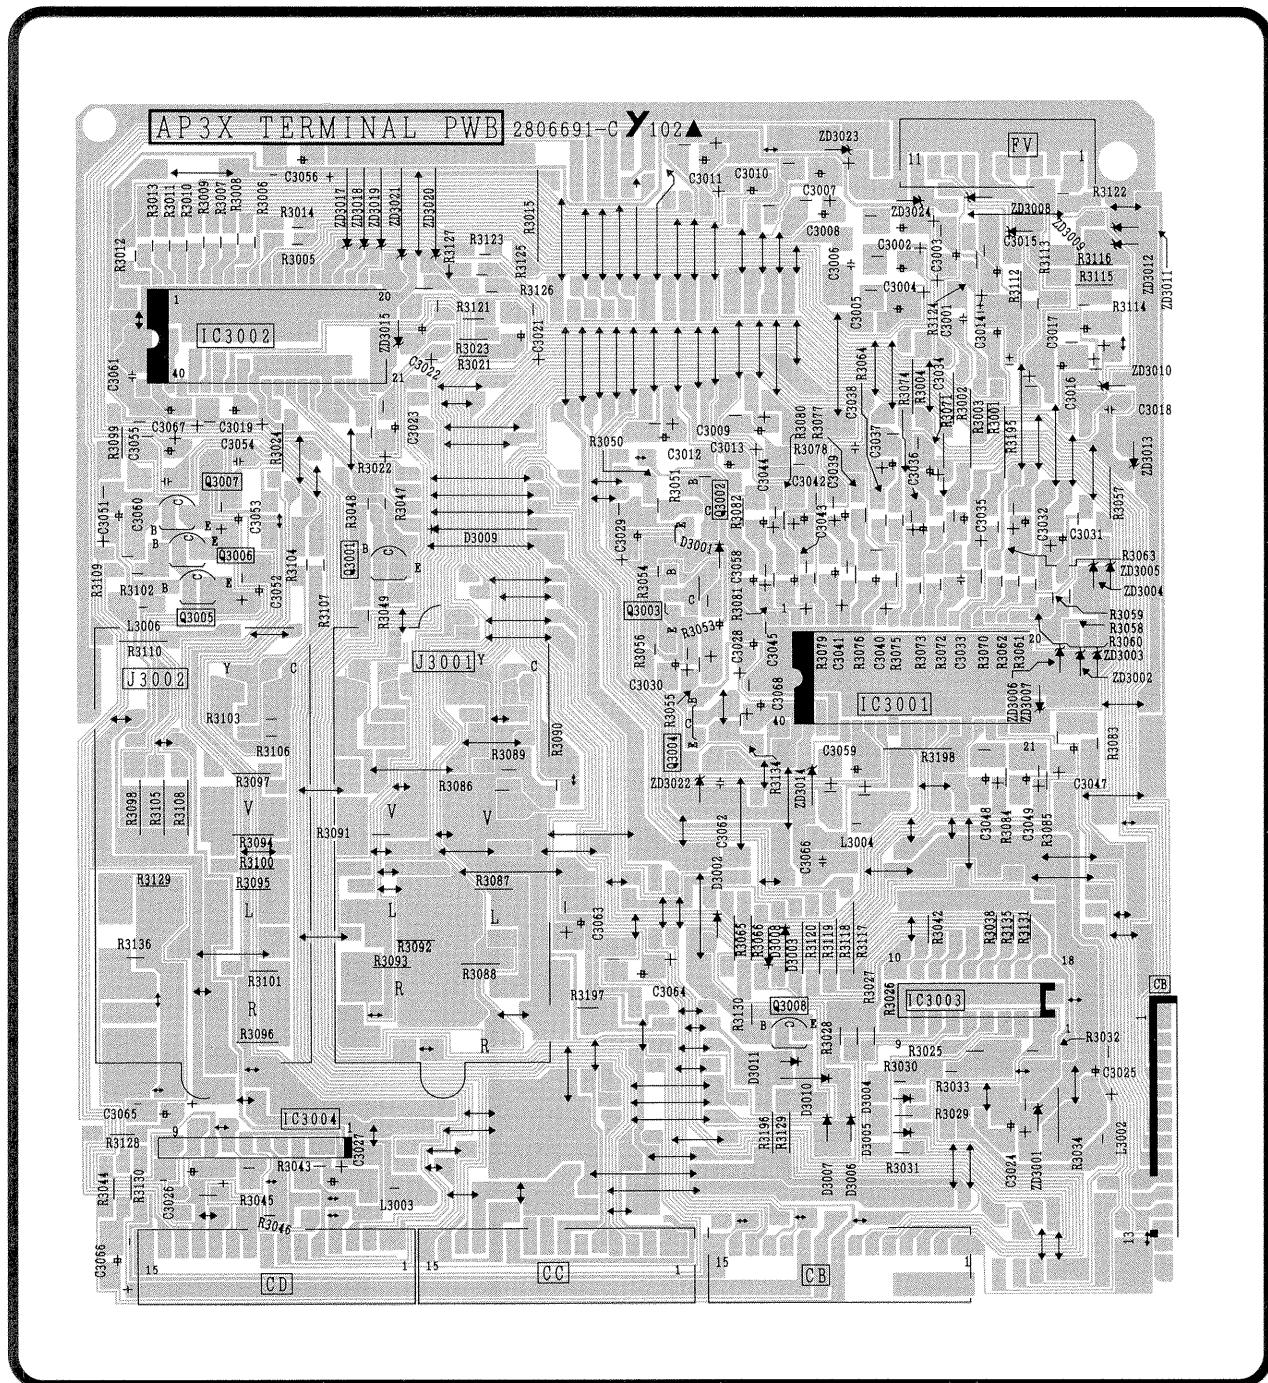




# PRINTED CIRCUIT BOARD

MTS P.C.B.

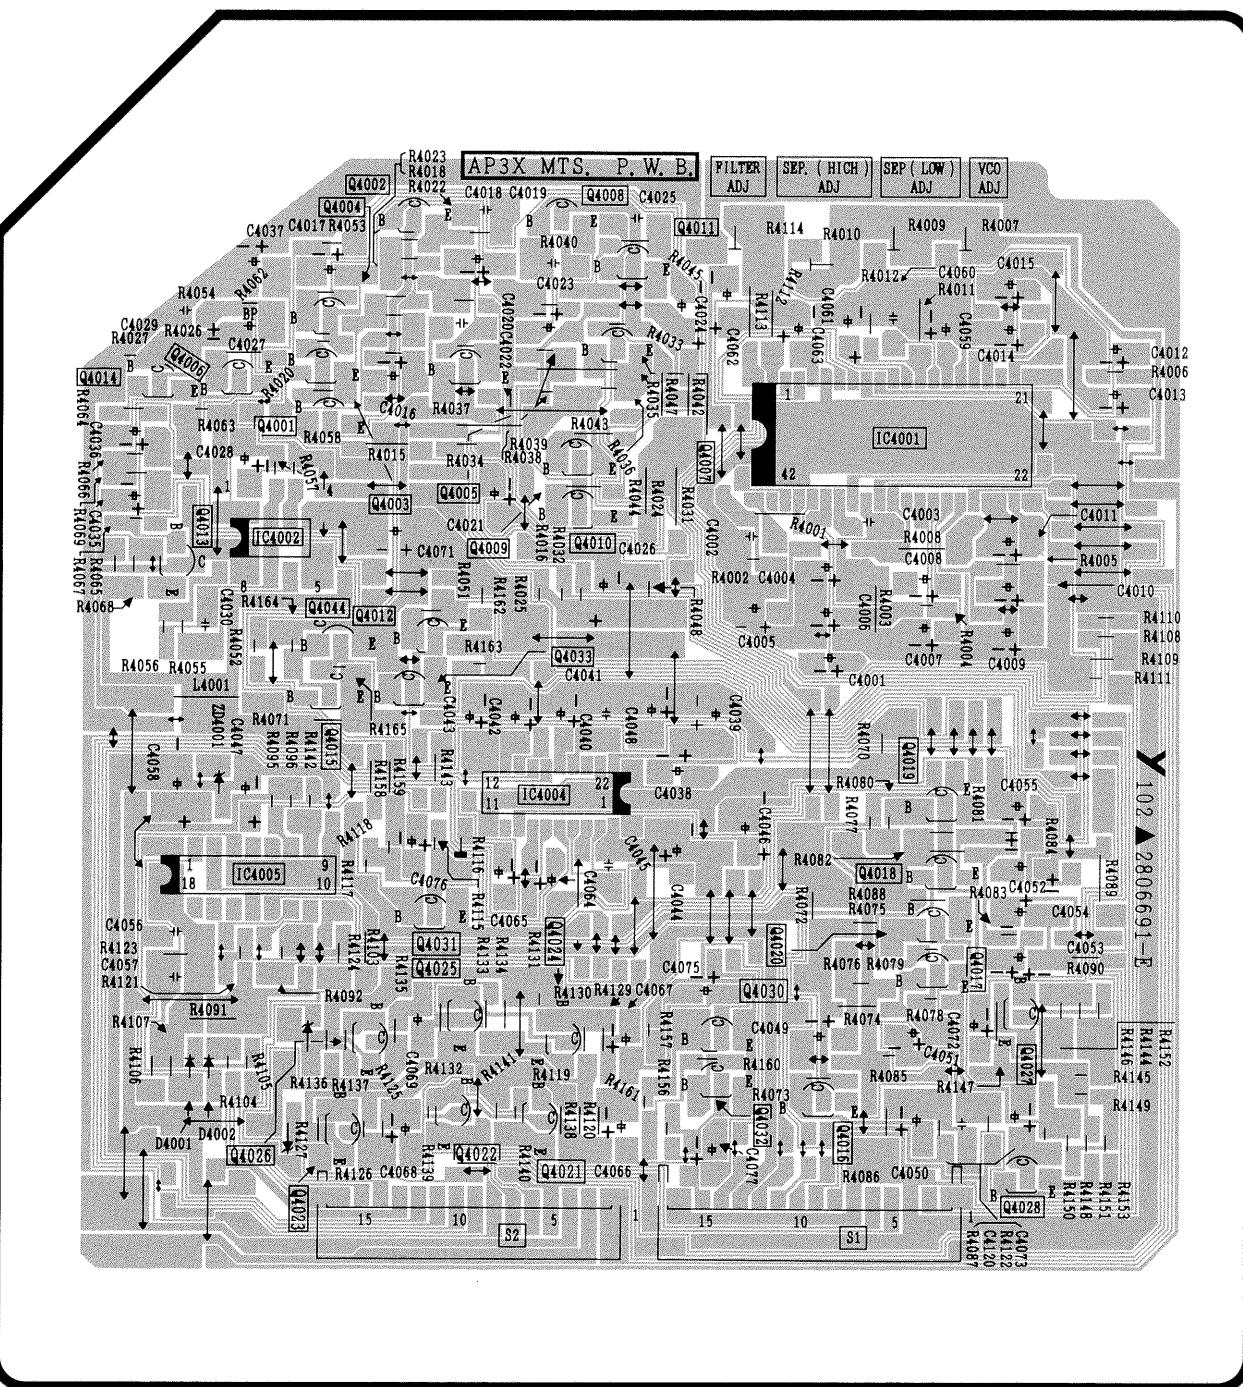


## PRINTED CIRCUIT BOARD


### RED C.P.T. P.C.B.

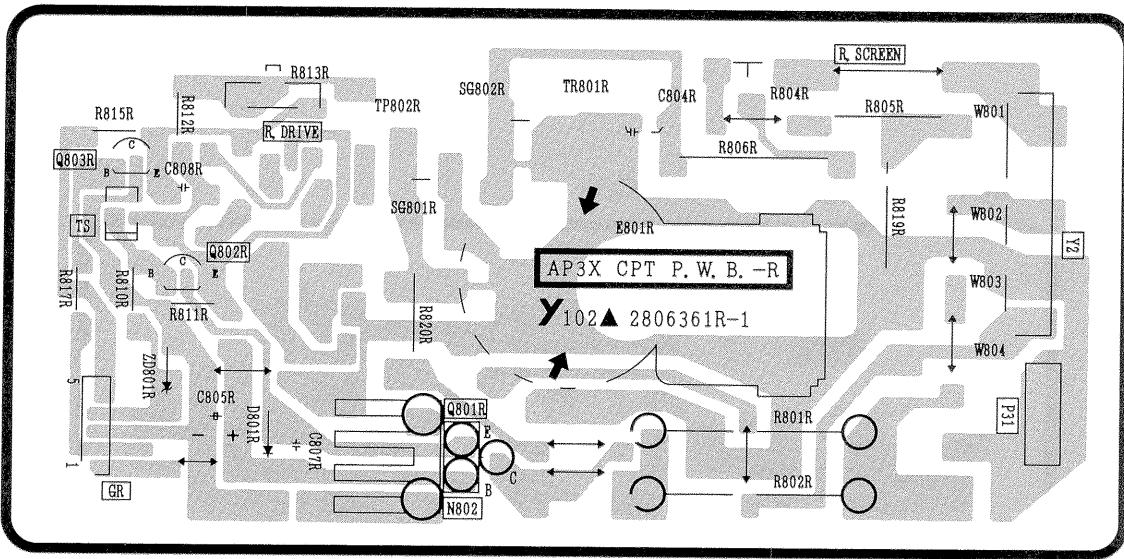

### GREEN C.P.T. P.C.B.

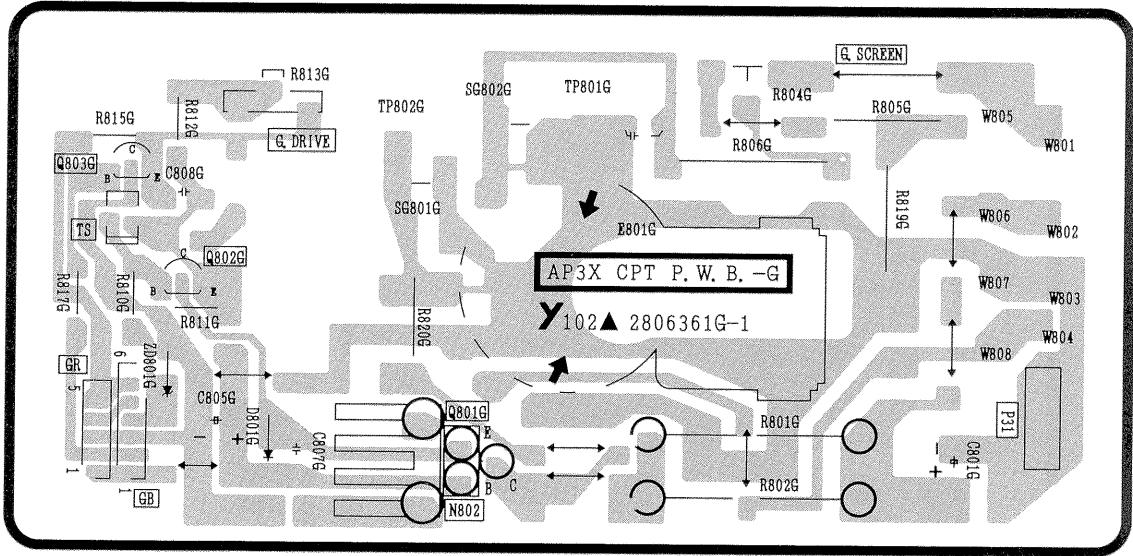


### BLUE C.P.T. P.C.B.

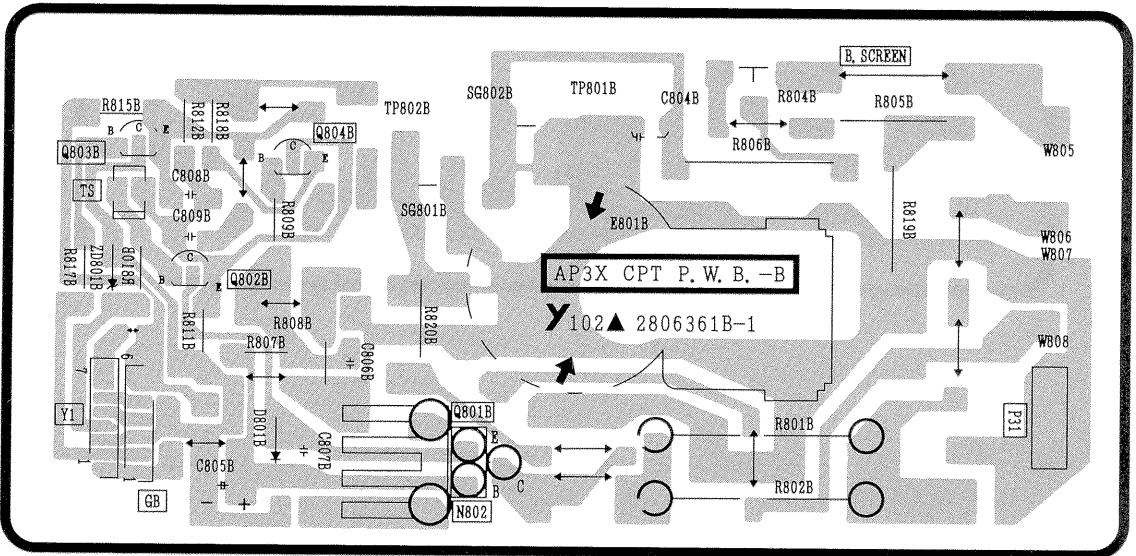


# PRINTED CIRCUIT BOARD

## DUAL FOCUS P.C.B. (AP34 ONLY)

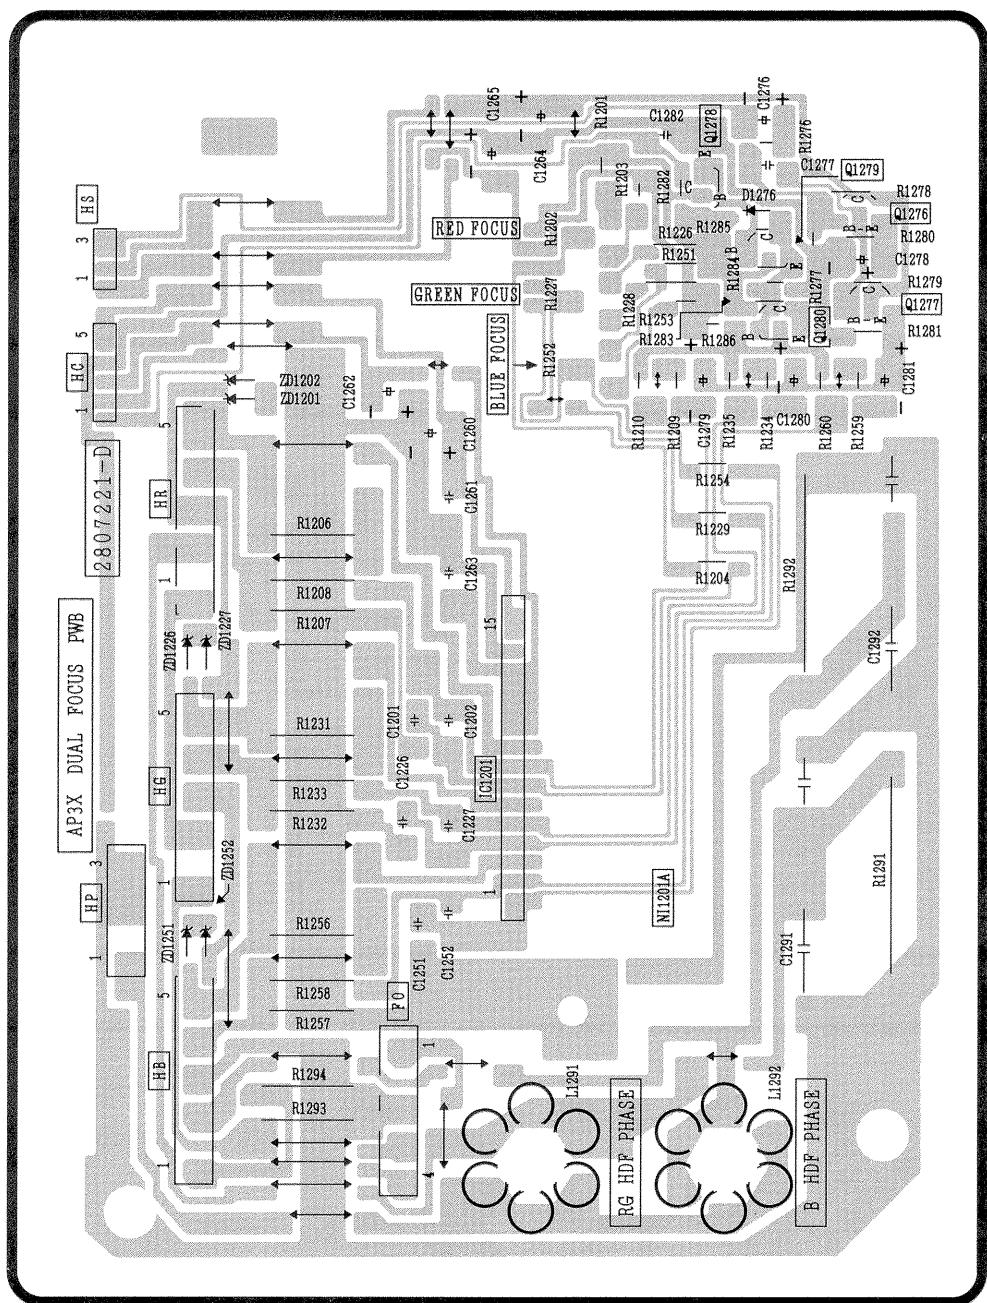


PRINTED CIRCUIT BOARD

SIGNAL P.C.B.

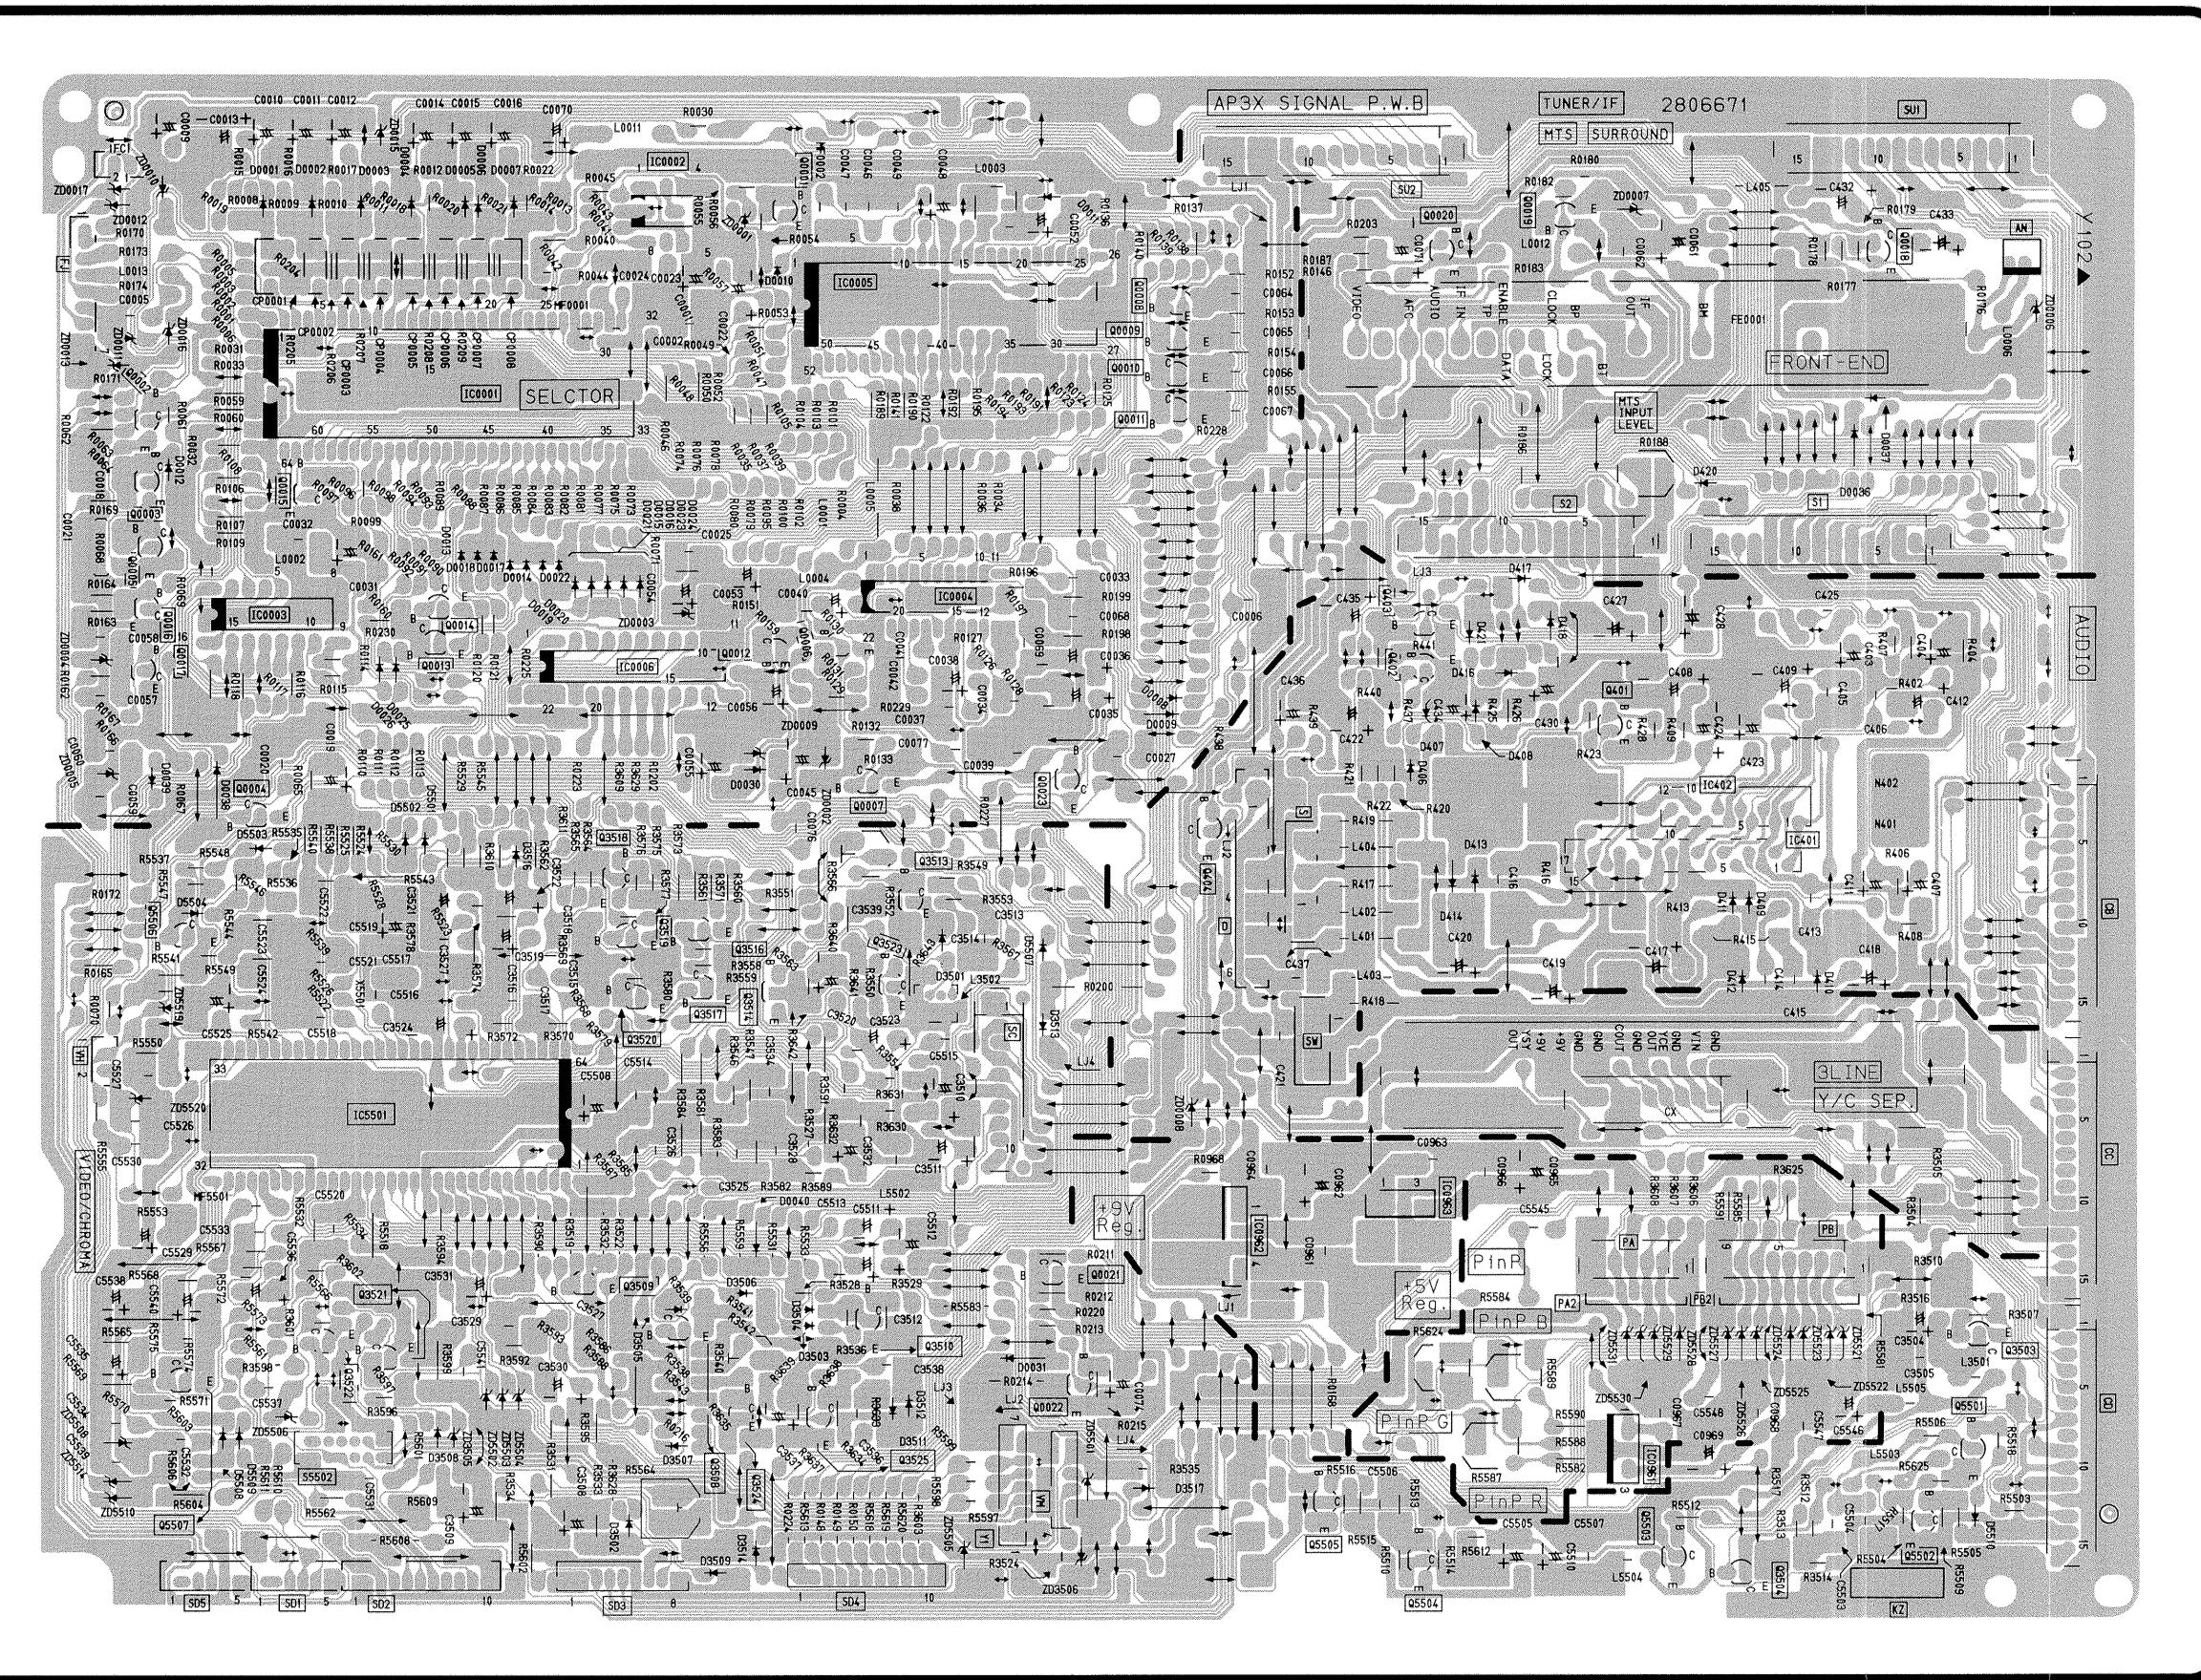


PRINTED CIRCUIT BOARD

POWER/DEFLECTION P.C.B.

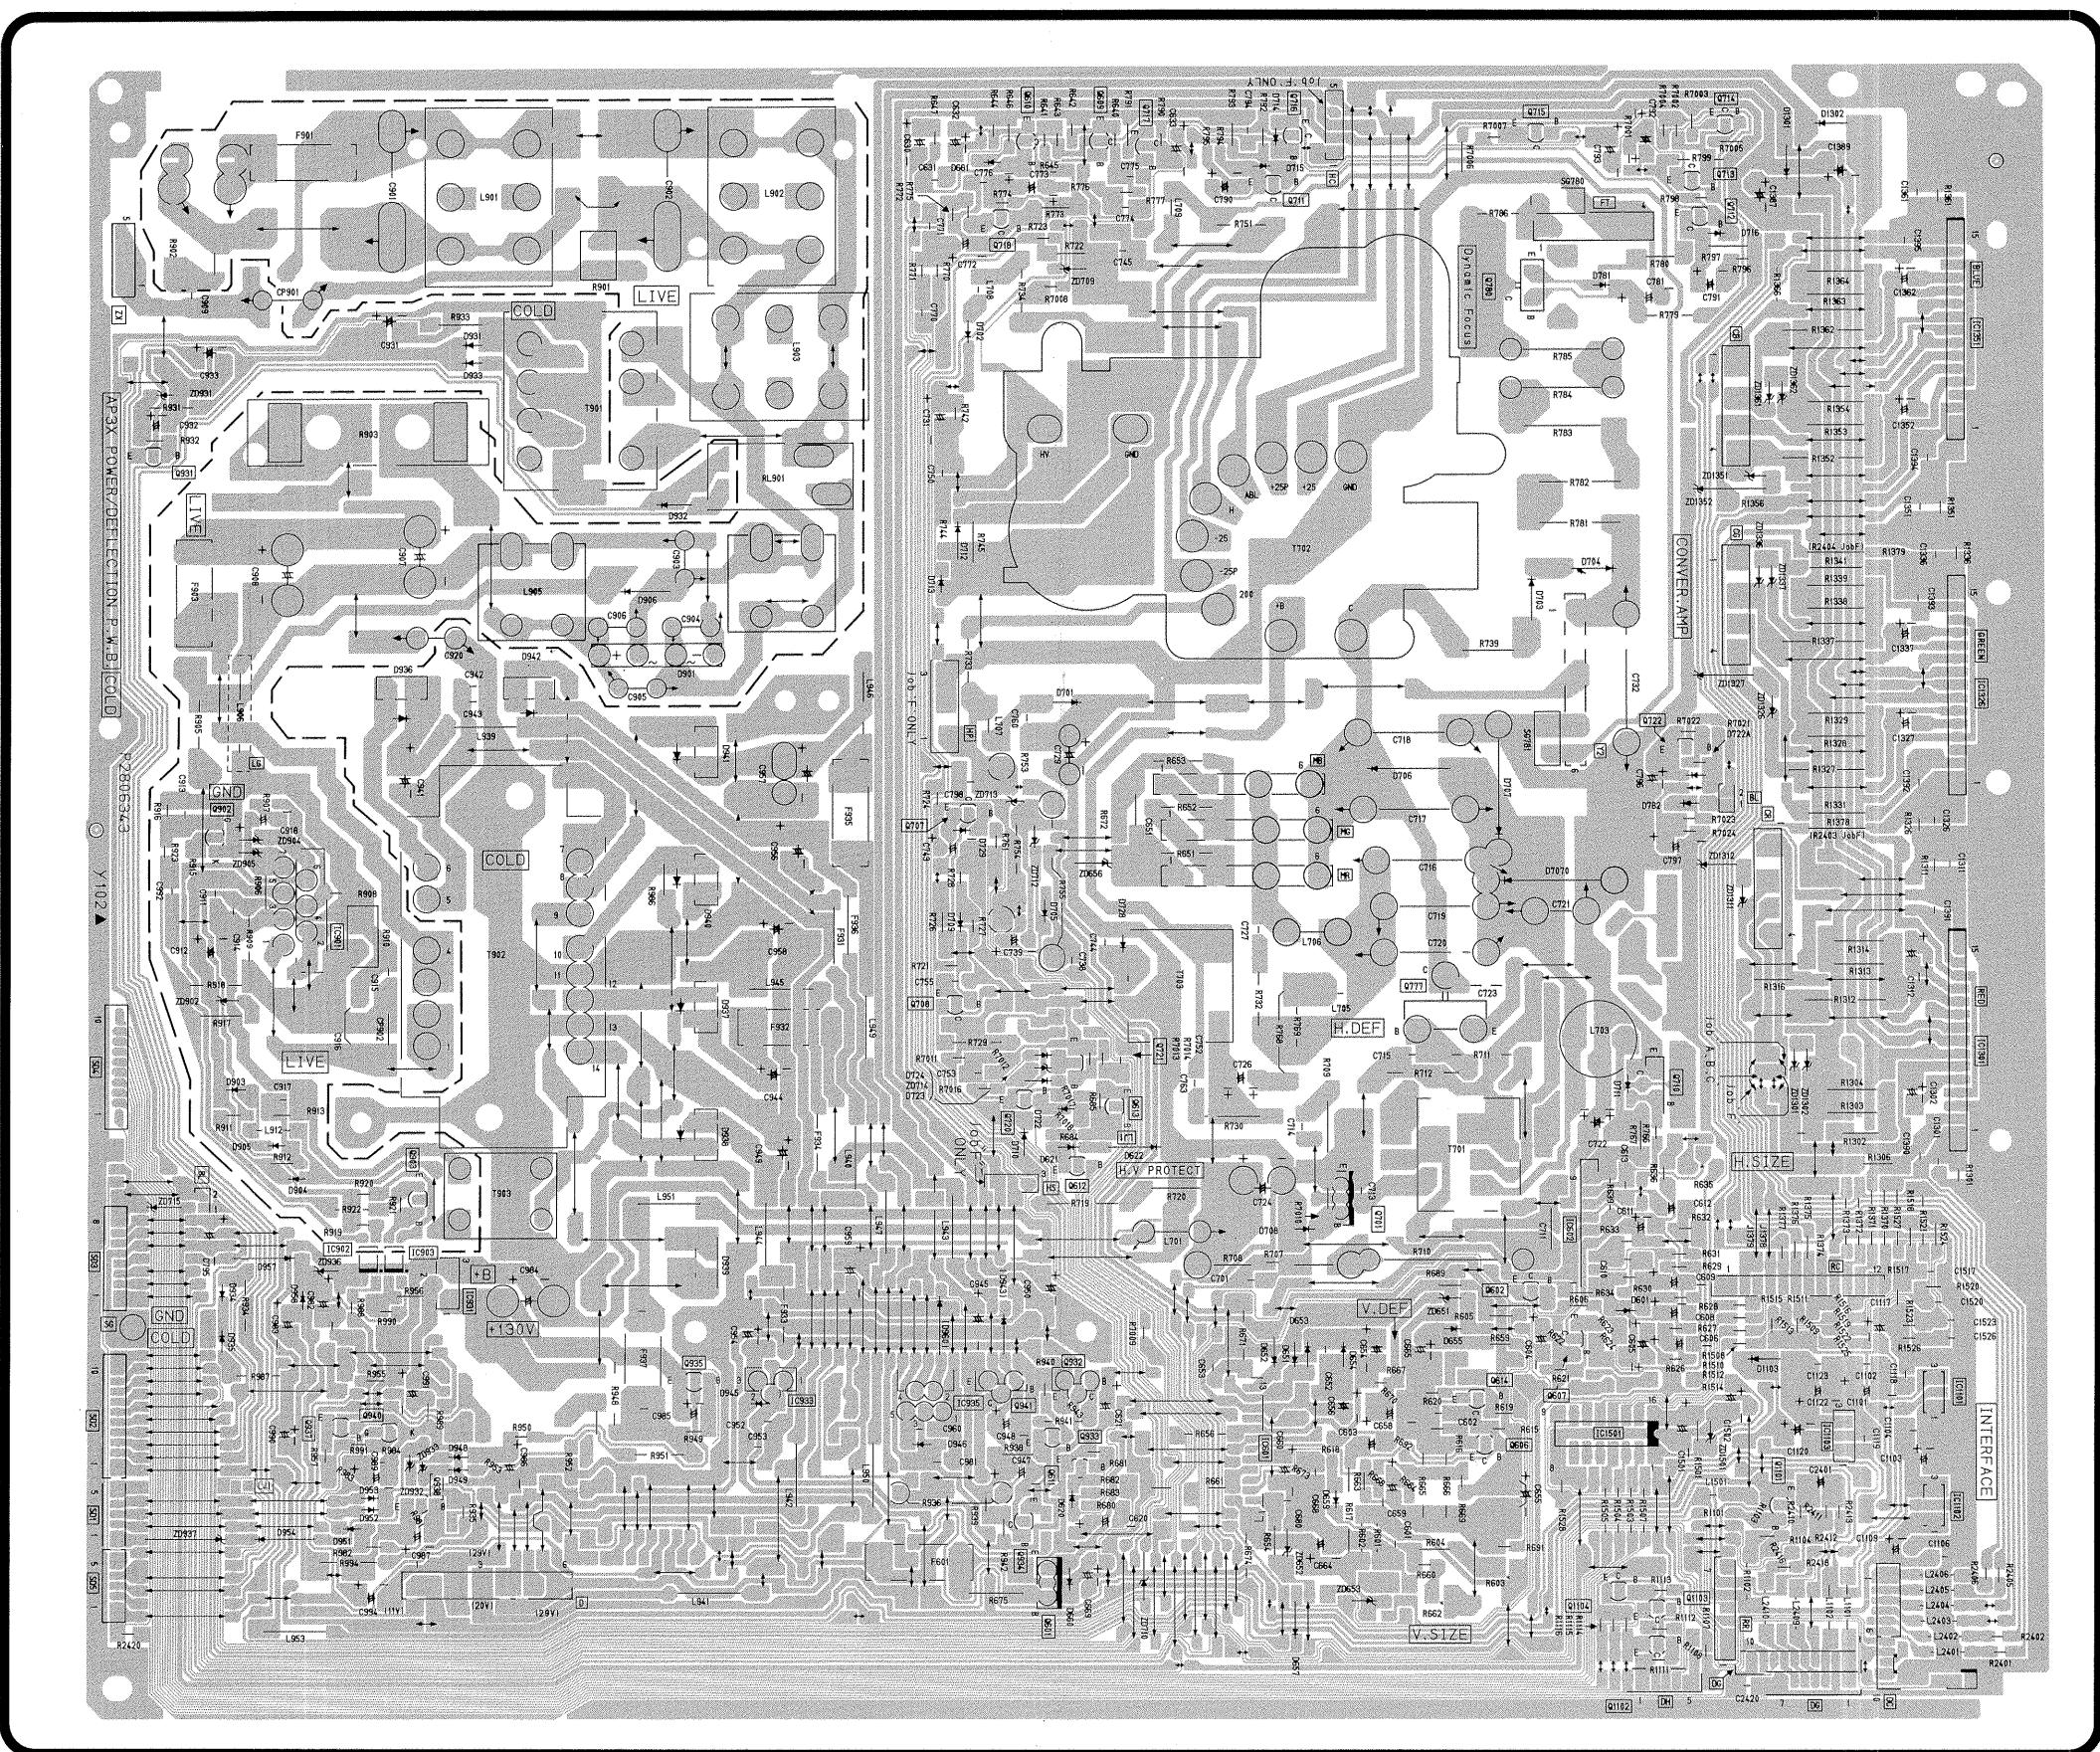


# WIRING DIAGRAM

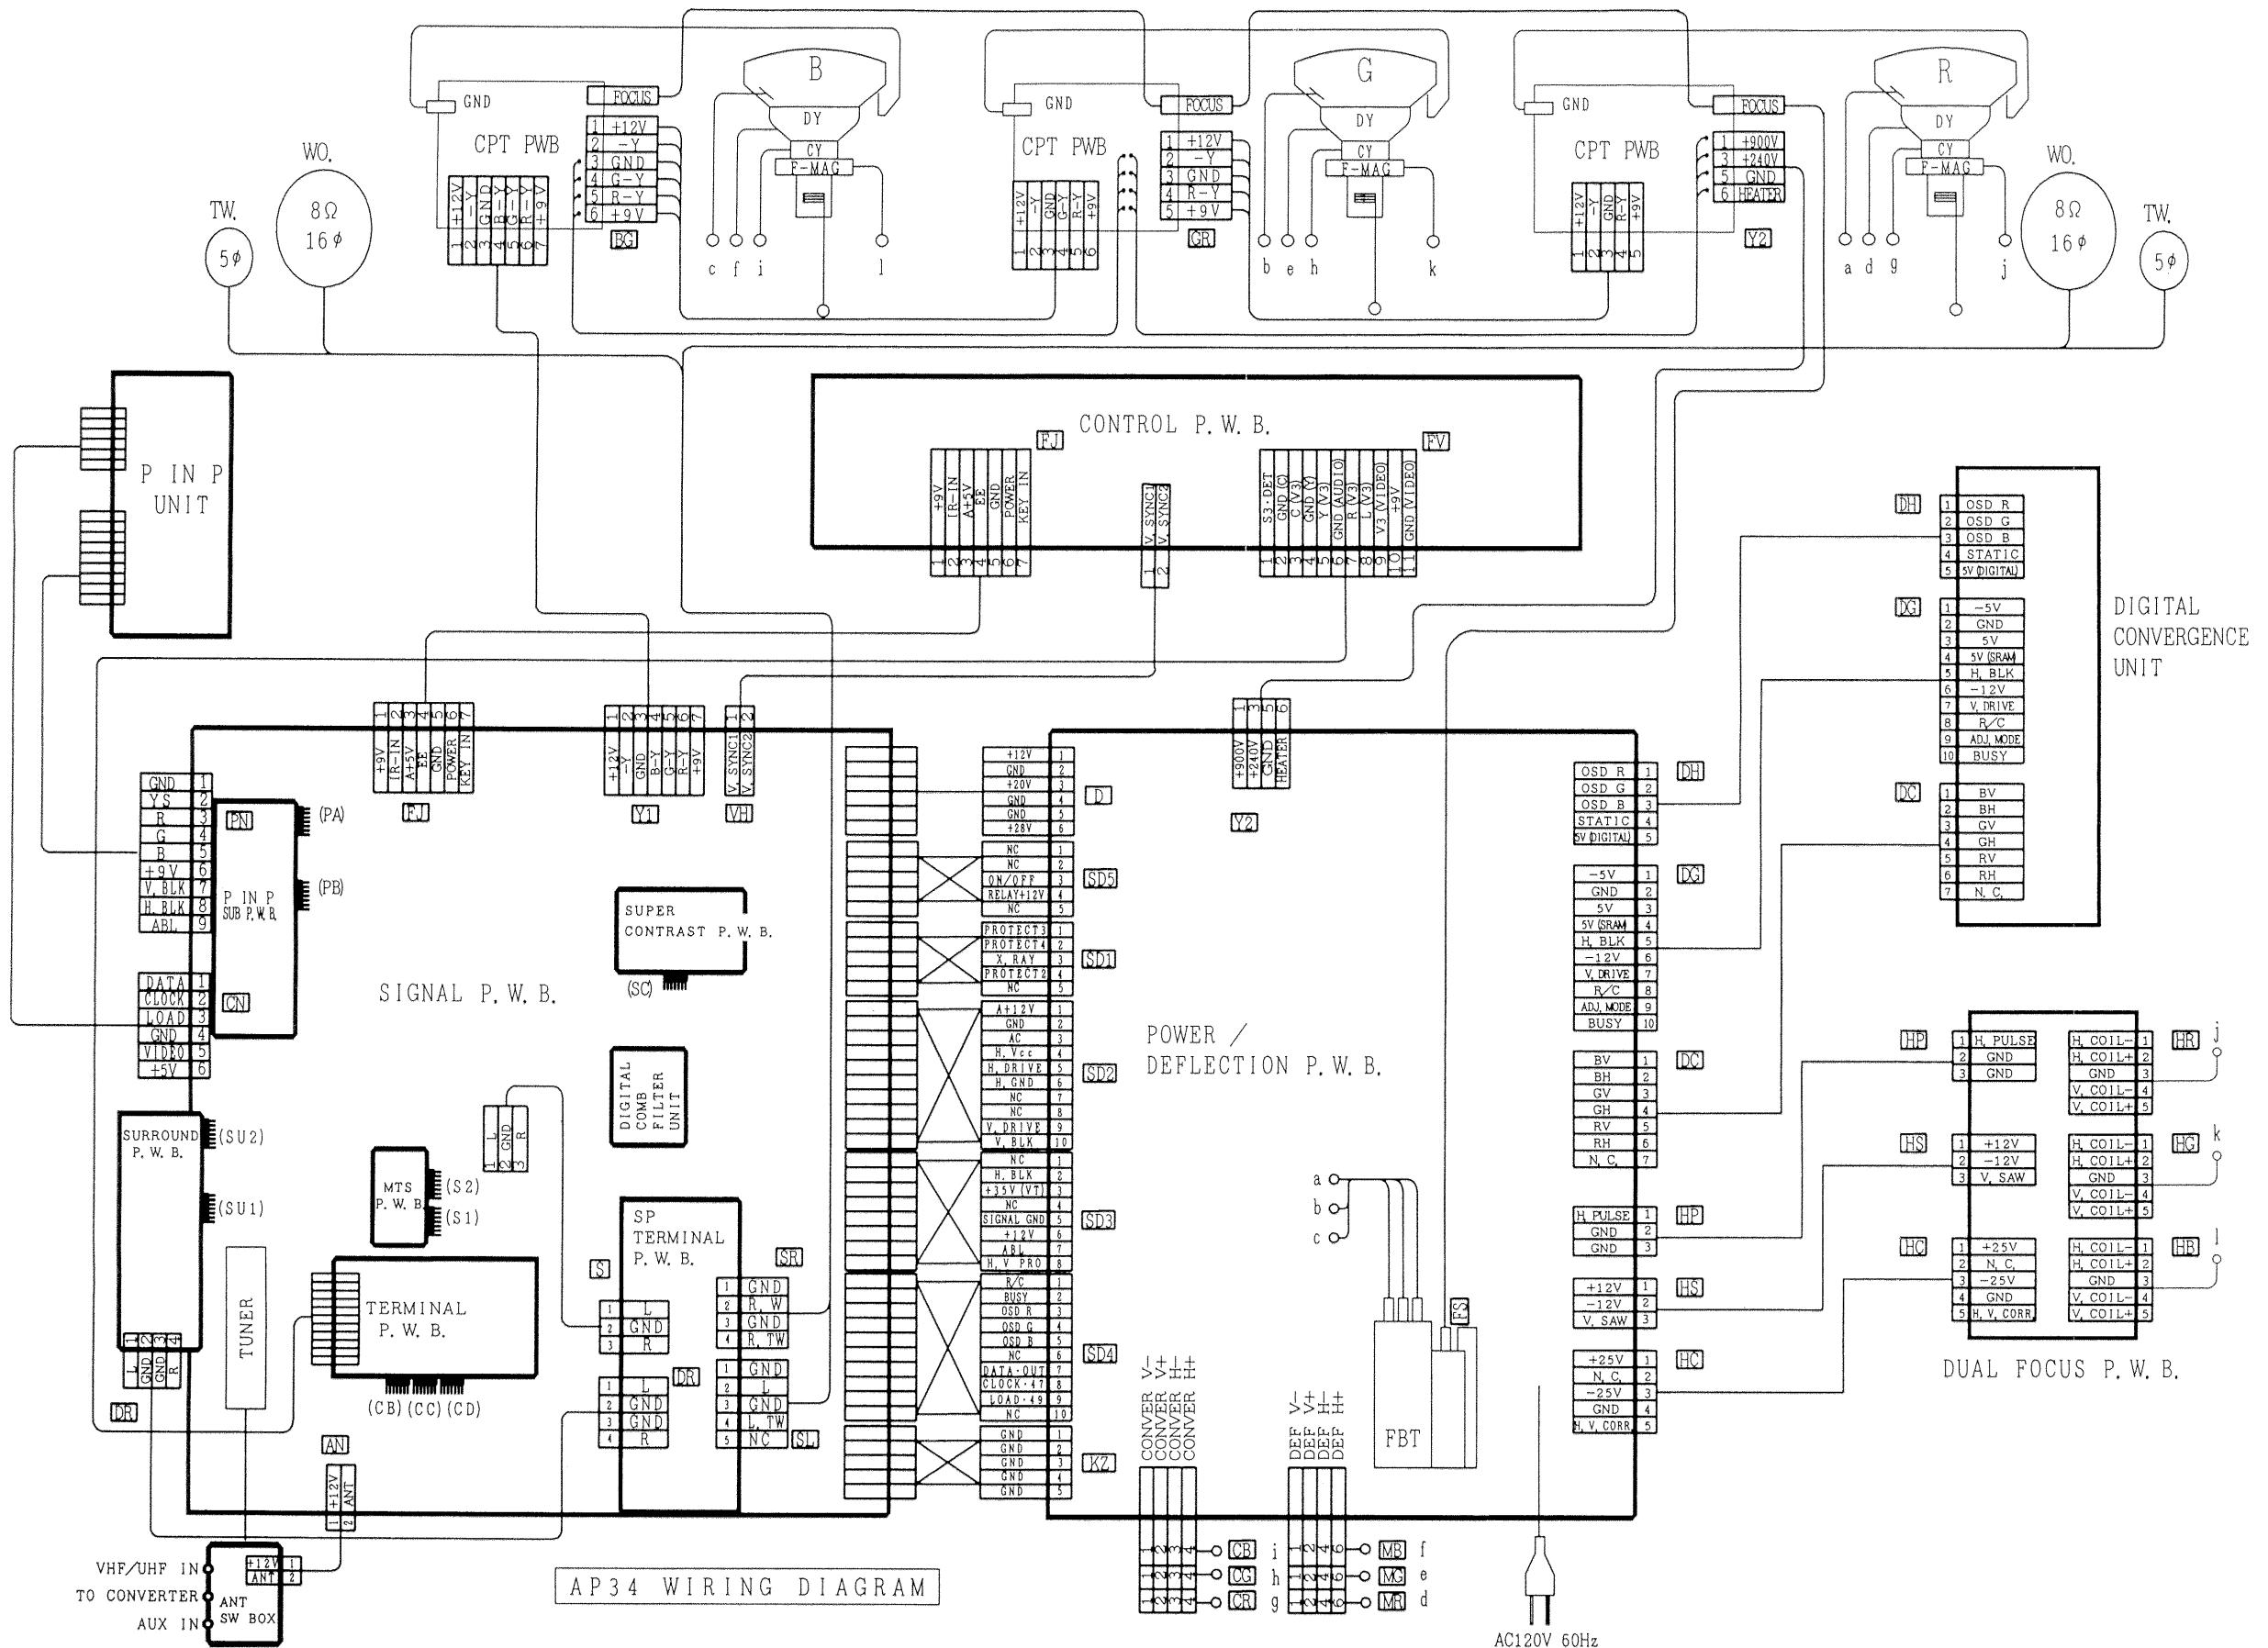


AP 34 WIRING DIAGRAM


# WIRING DIAGRAM

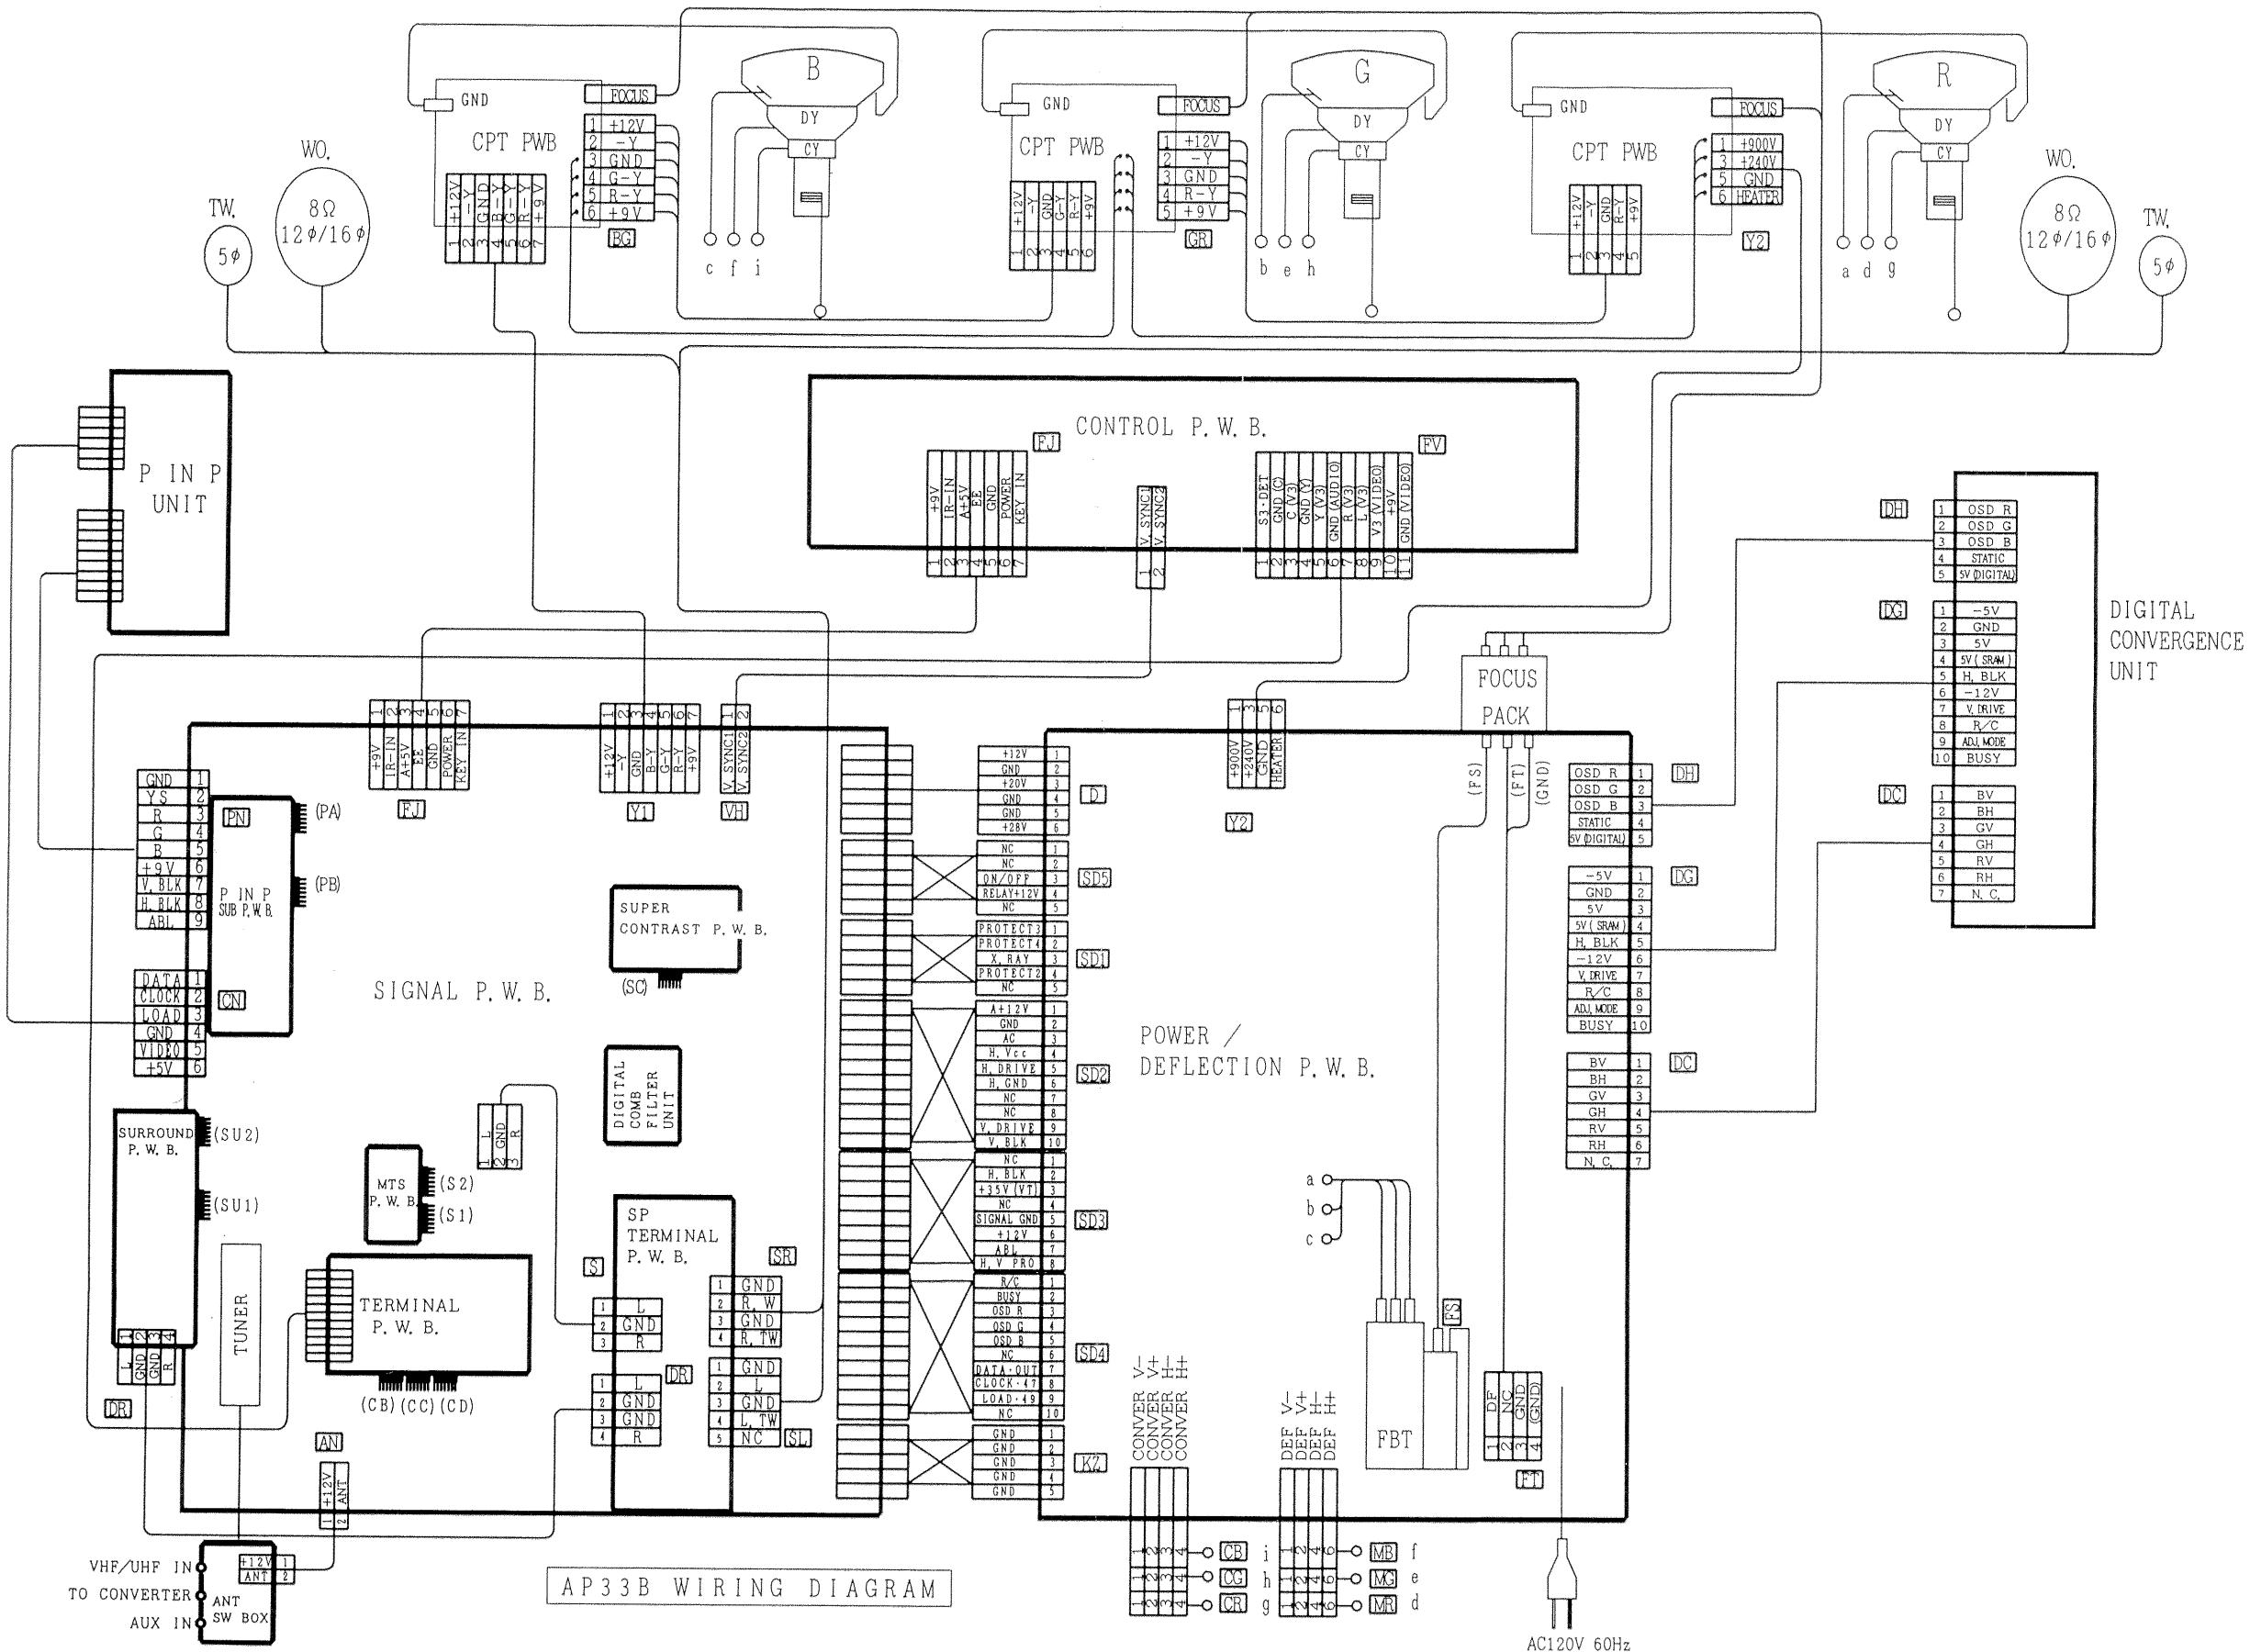


# WIRING DIAGRAM — AP34 CHASSIS

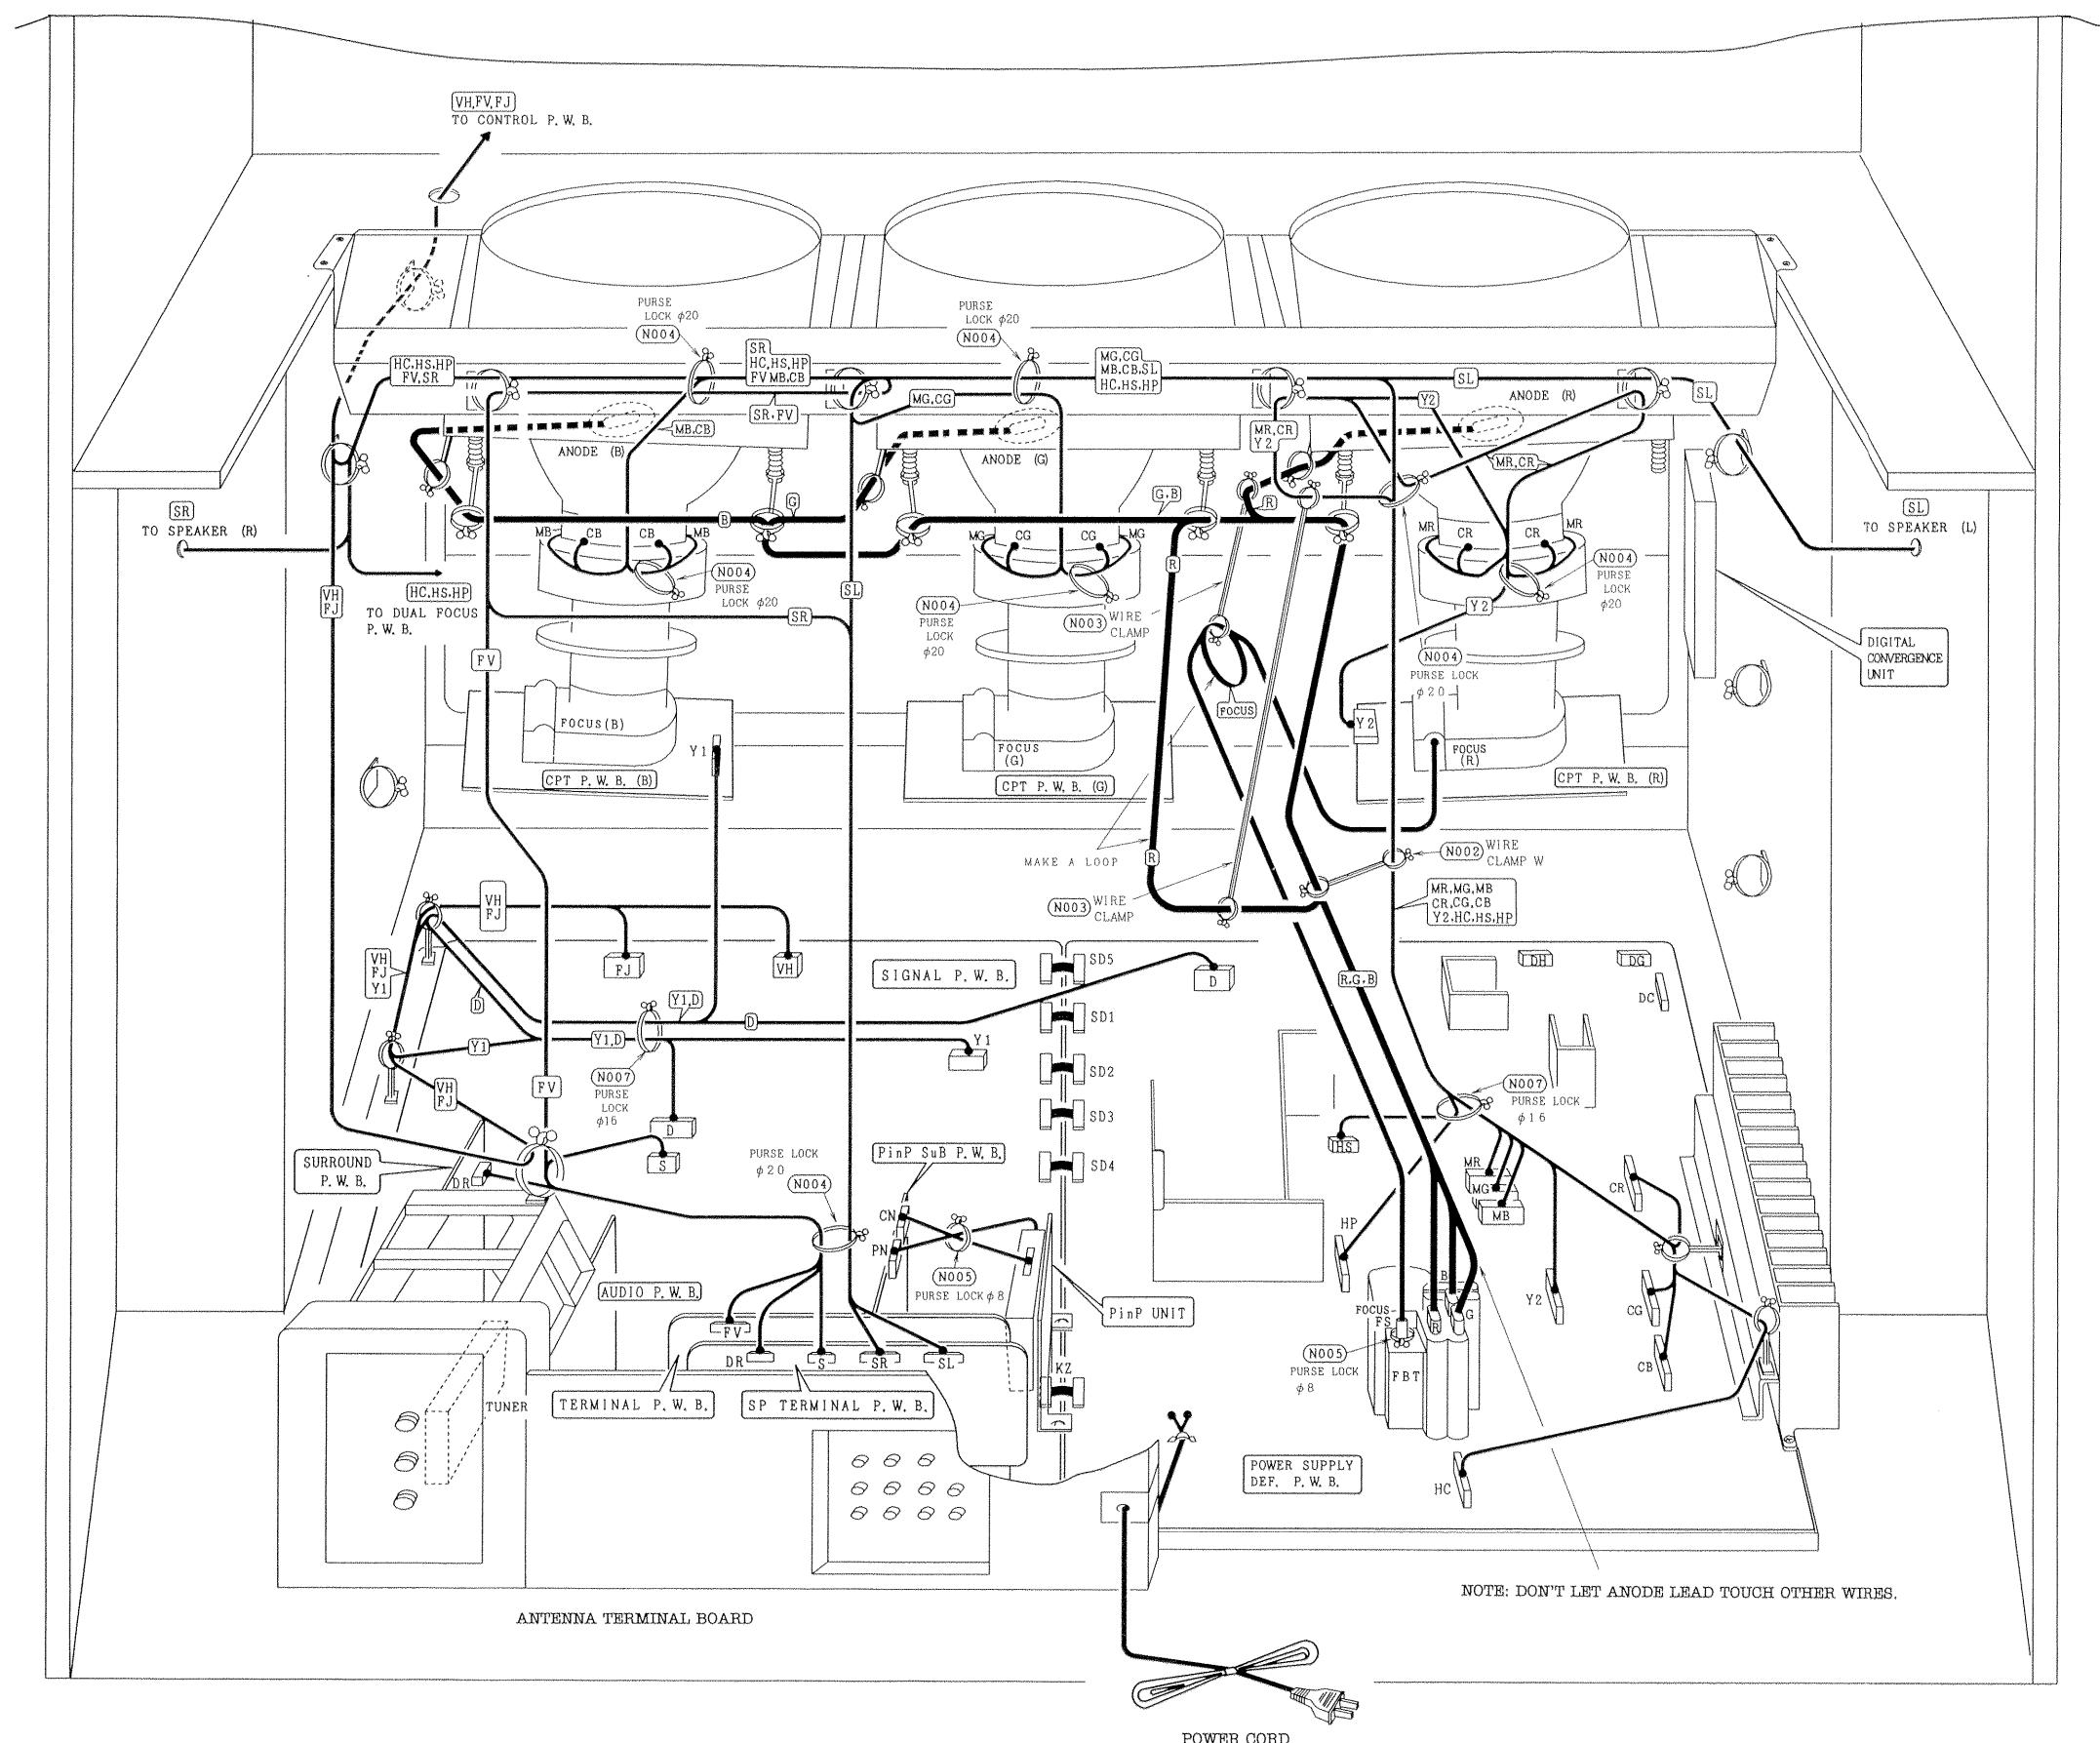


# WIRING DIAGRAM — AP34 CHASSIS

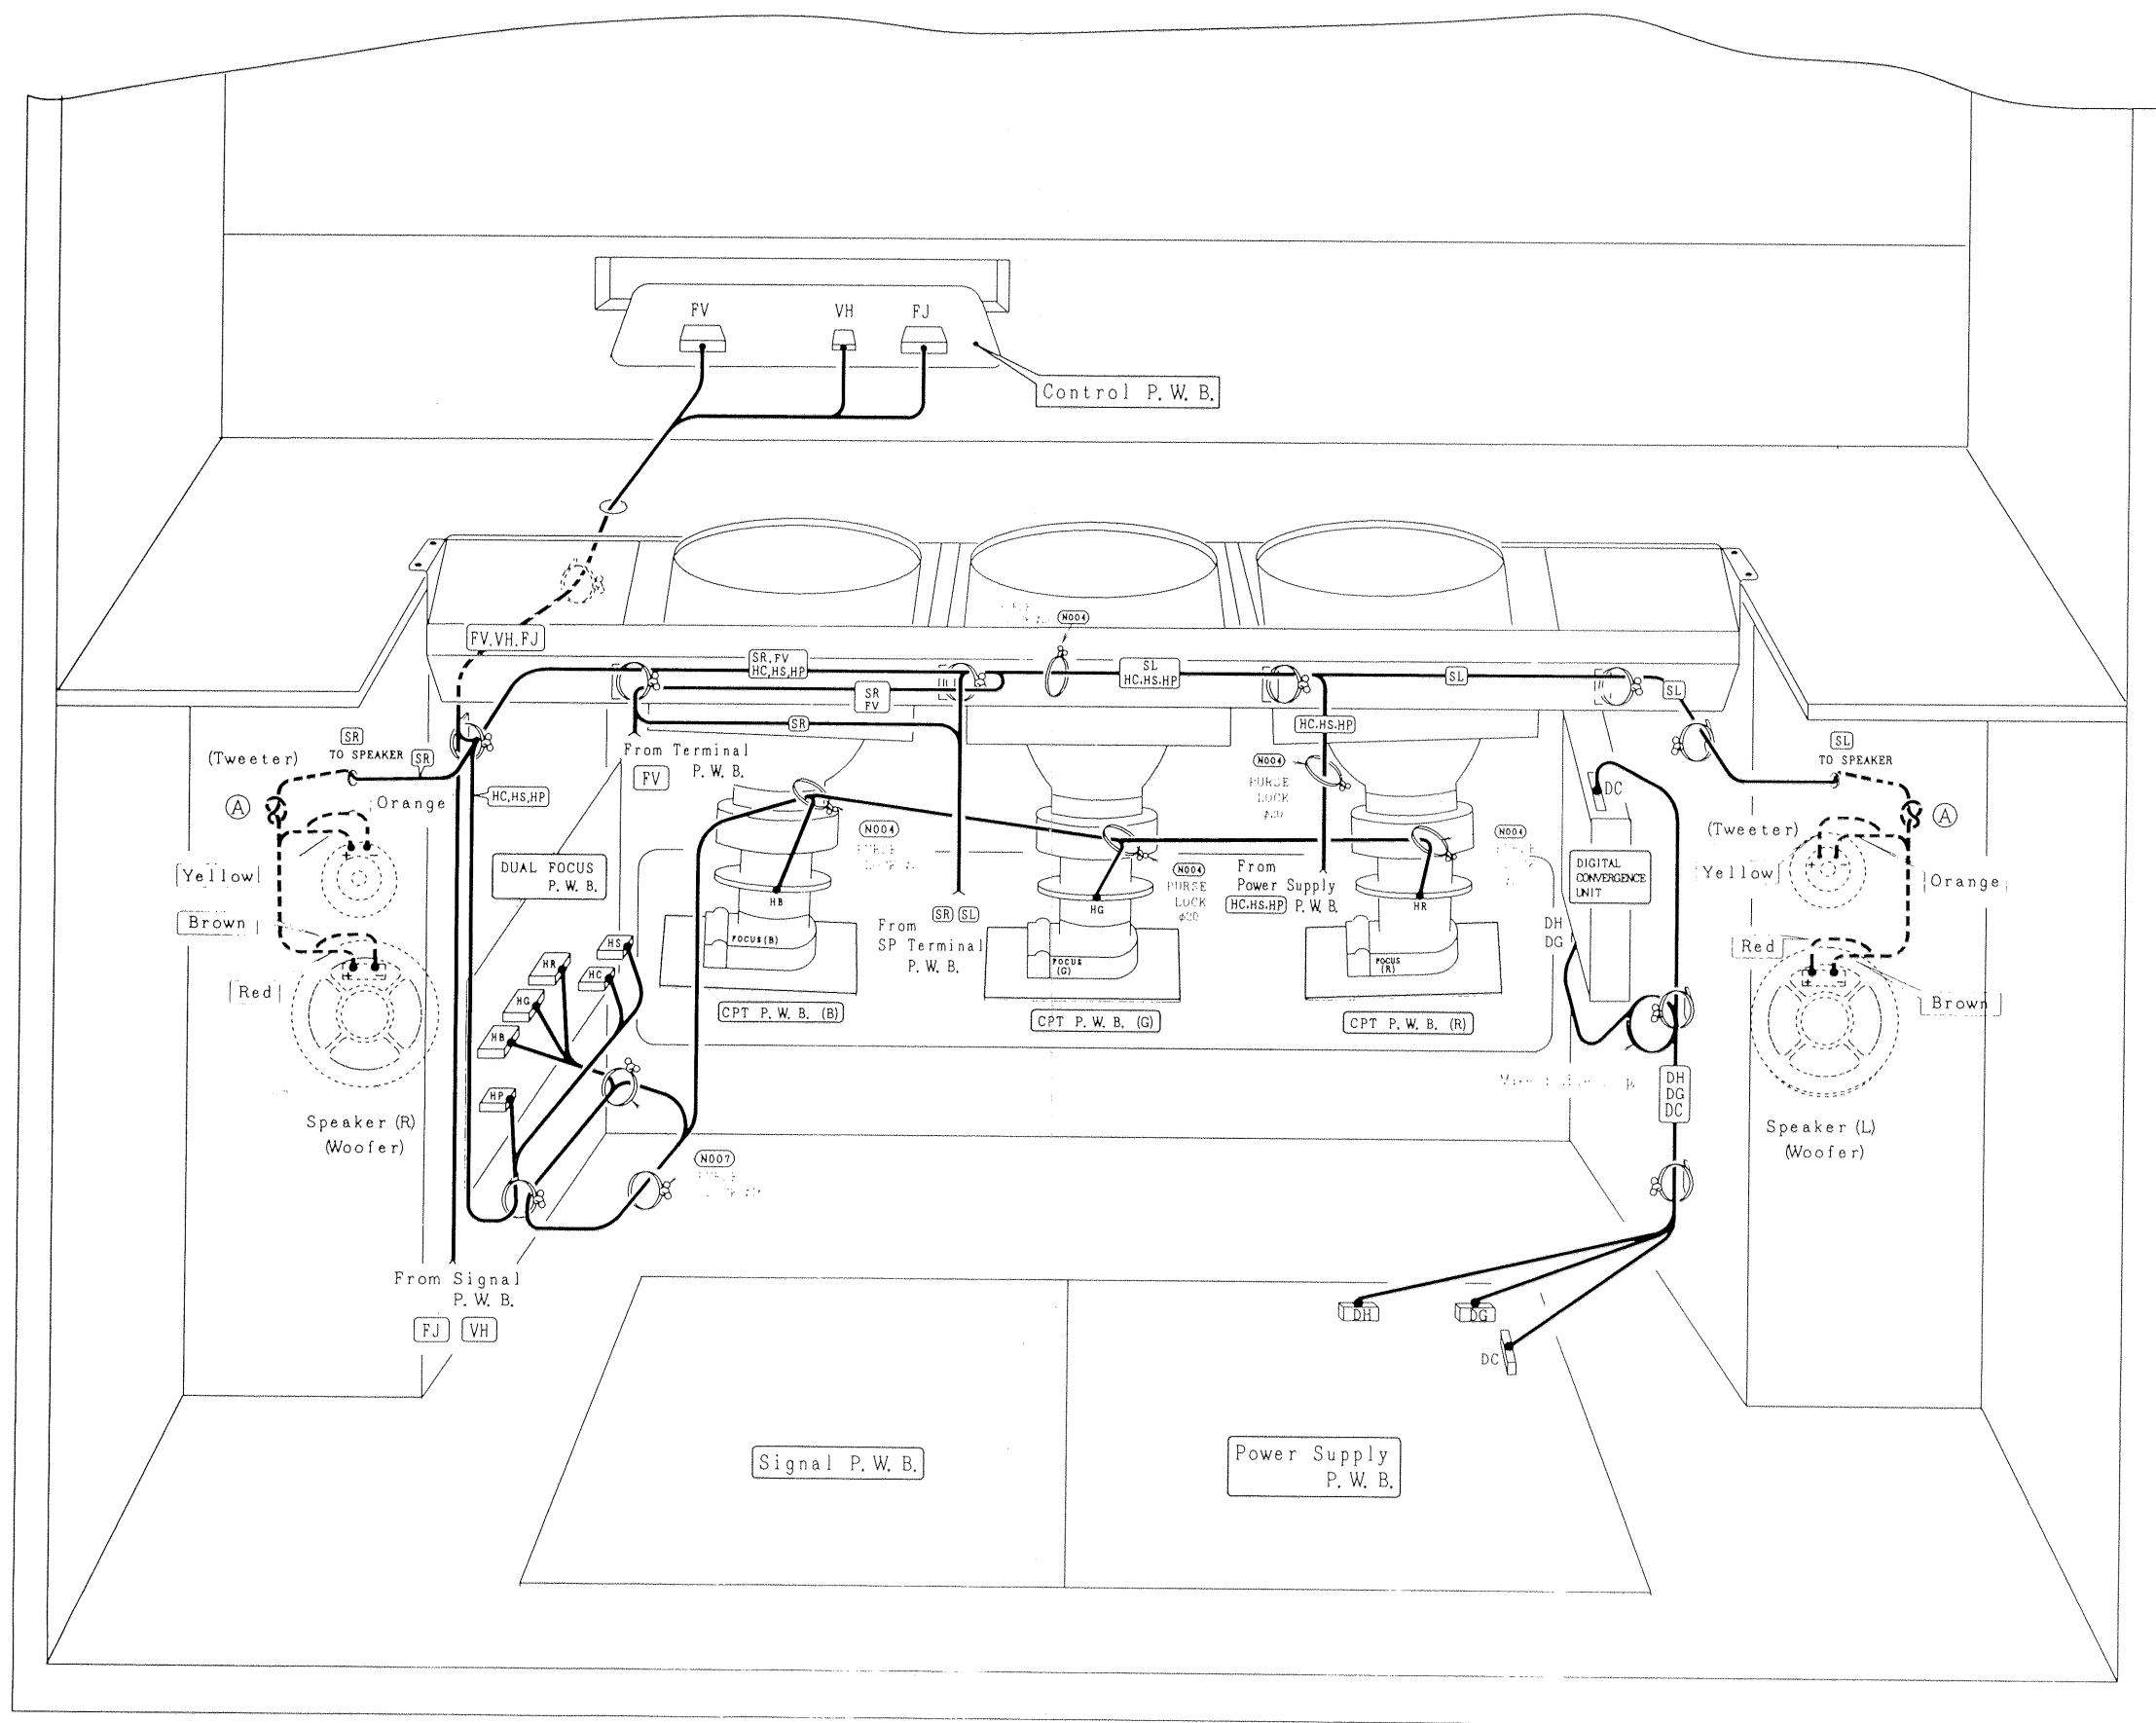


# WIRING DIAGRAM — AP33B CHASSIS

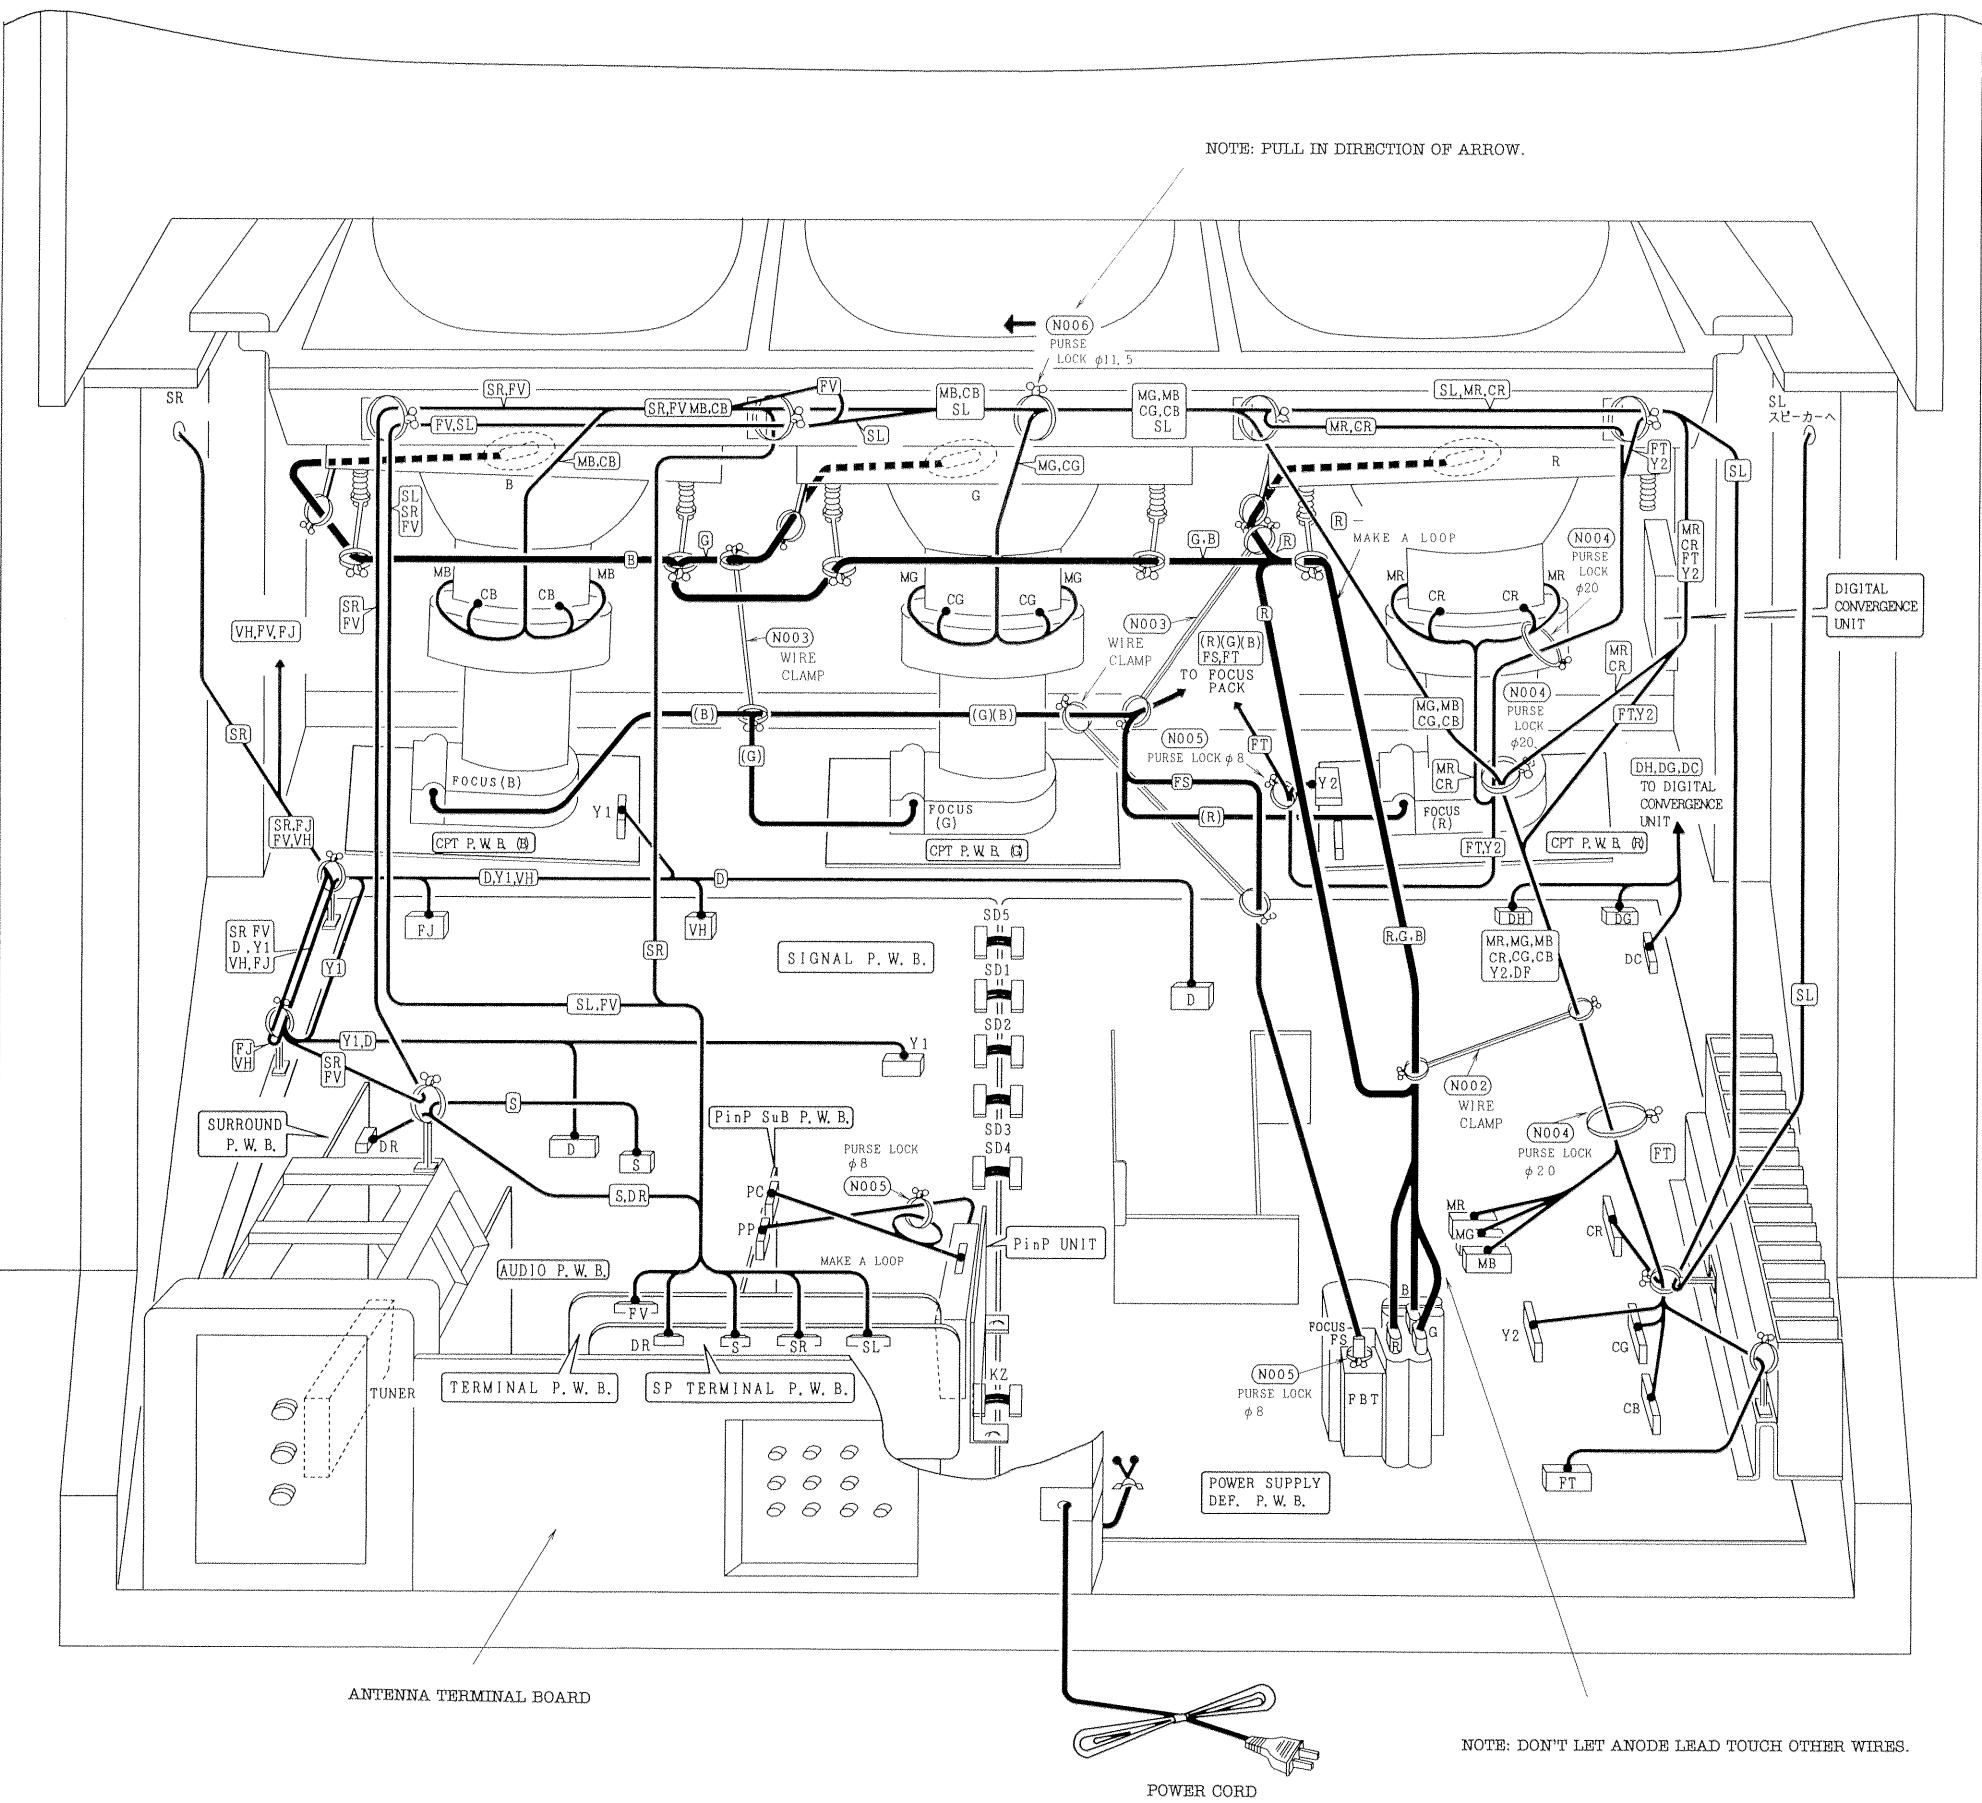

WIRING DIAGRAM — AP33B CHASSIS

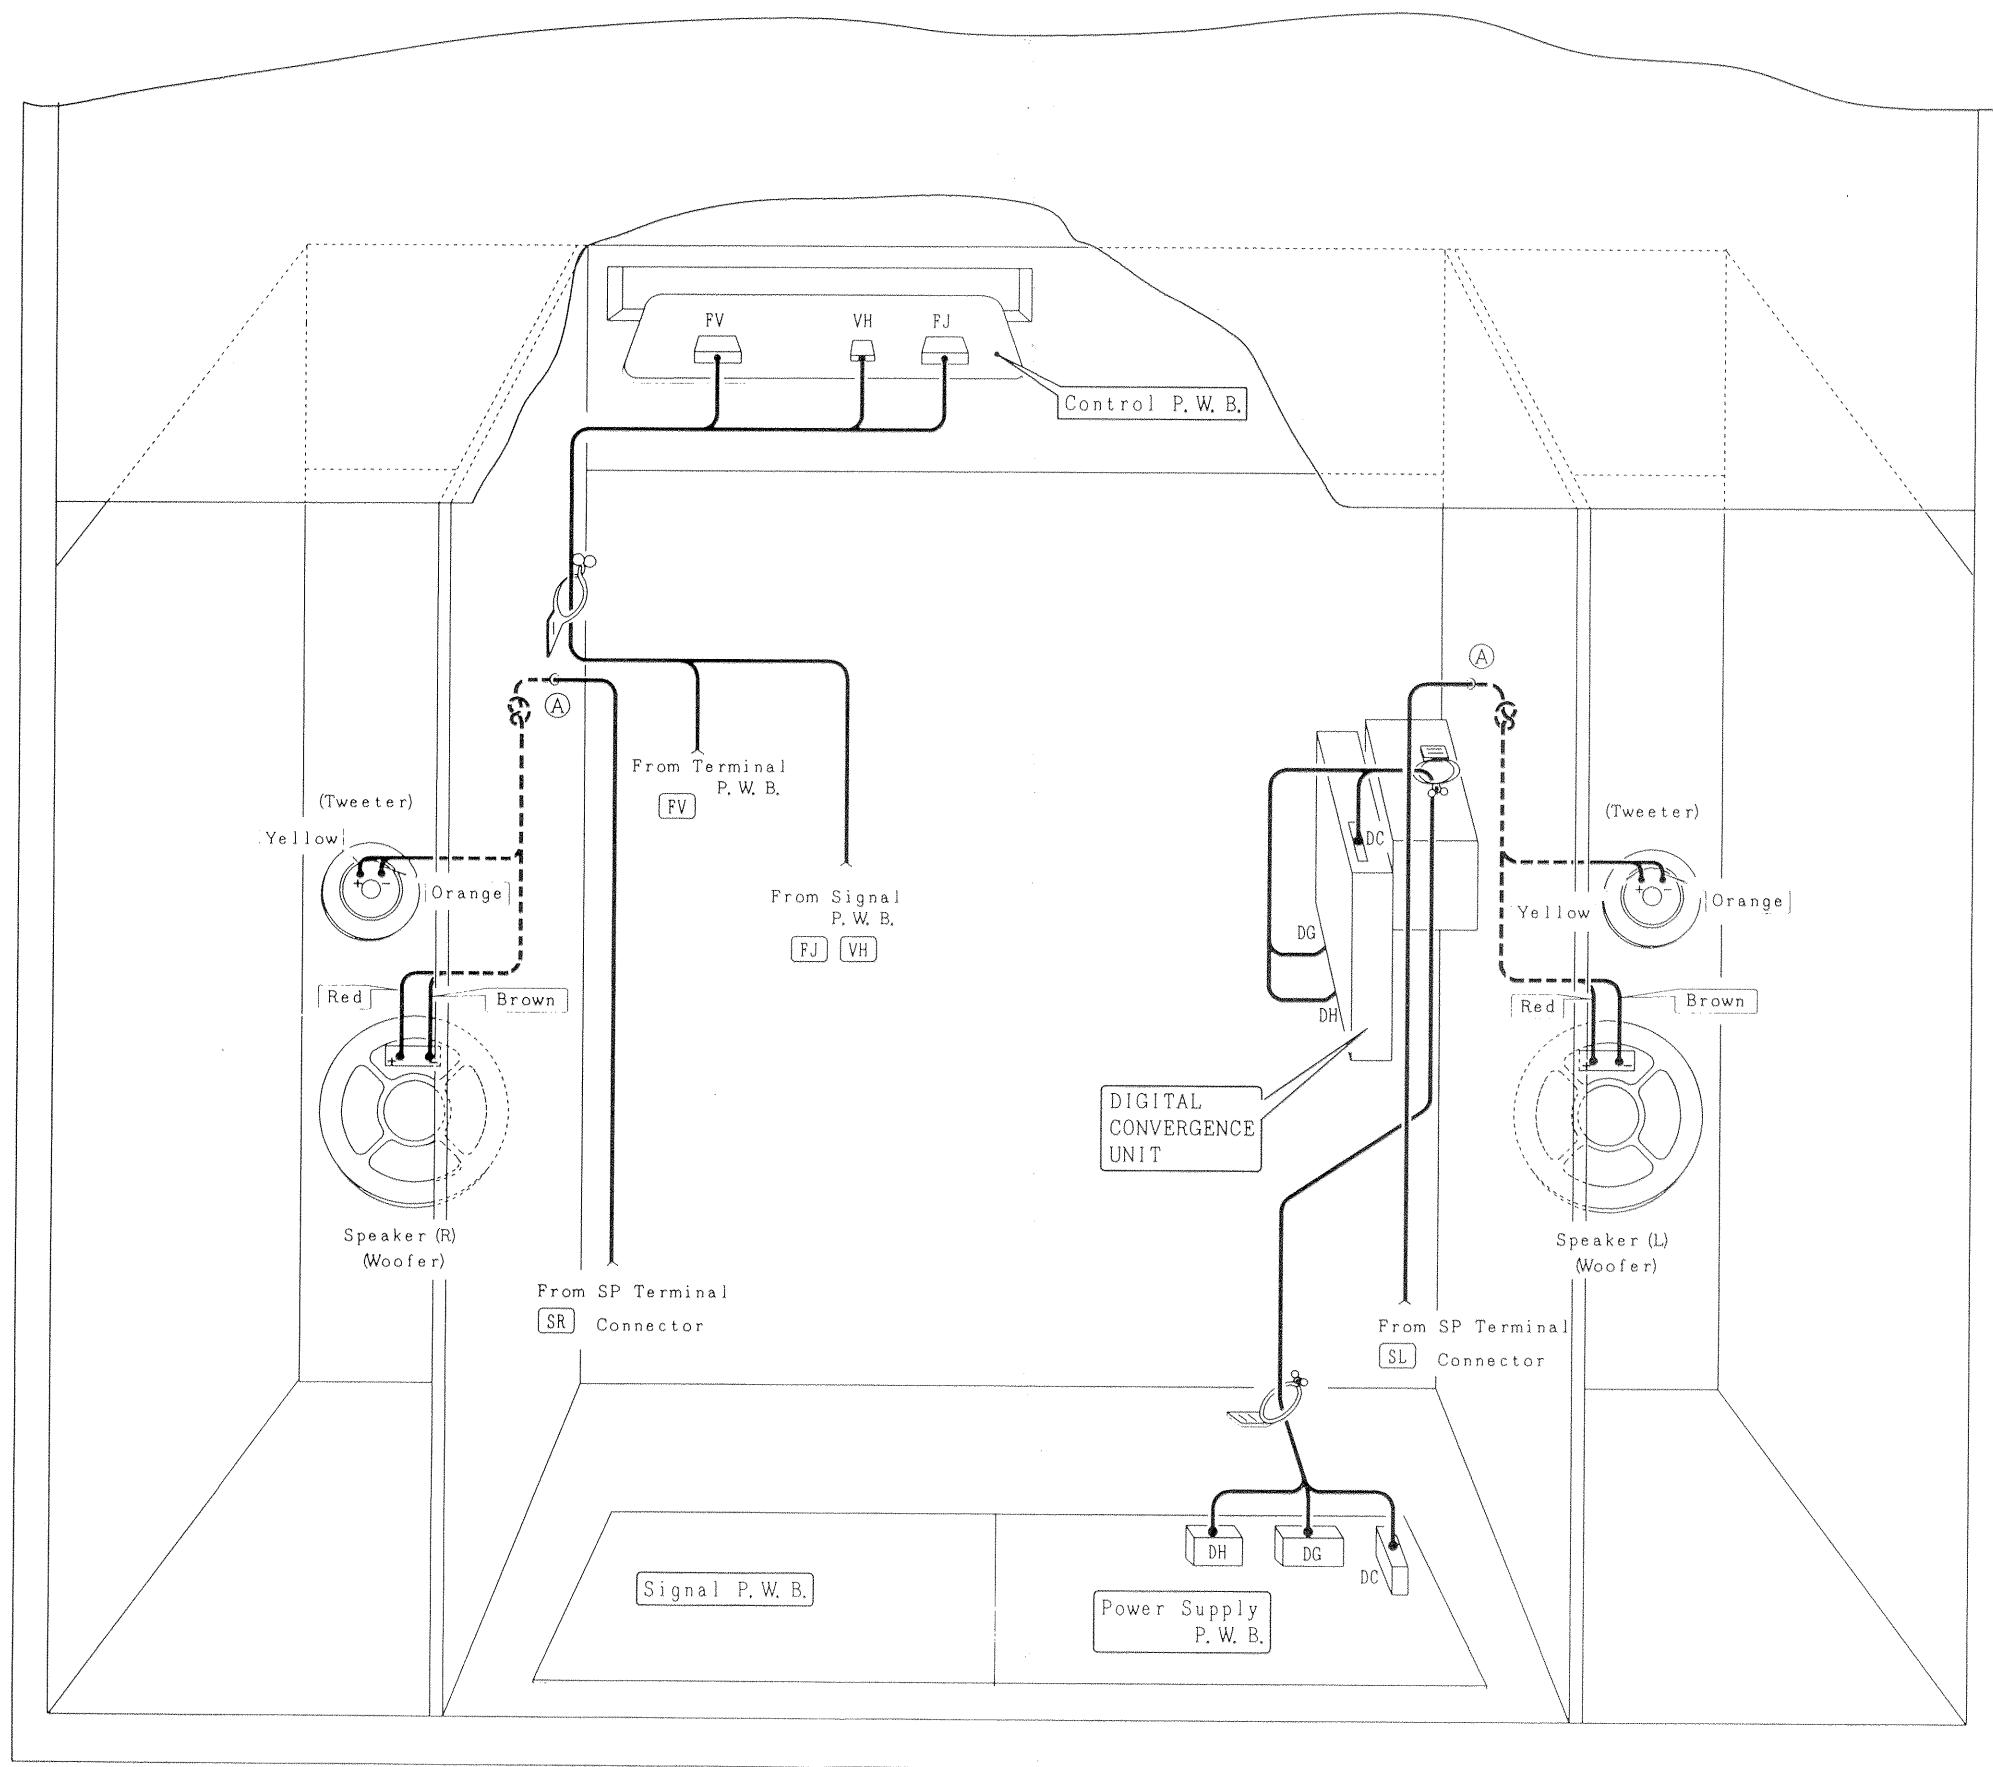


**EXPLODED VIEW  
(60SX3B, 60SX4K)**

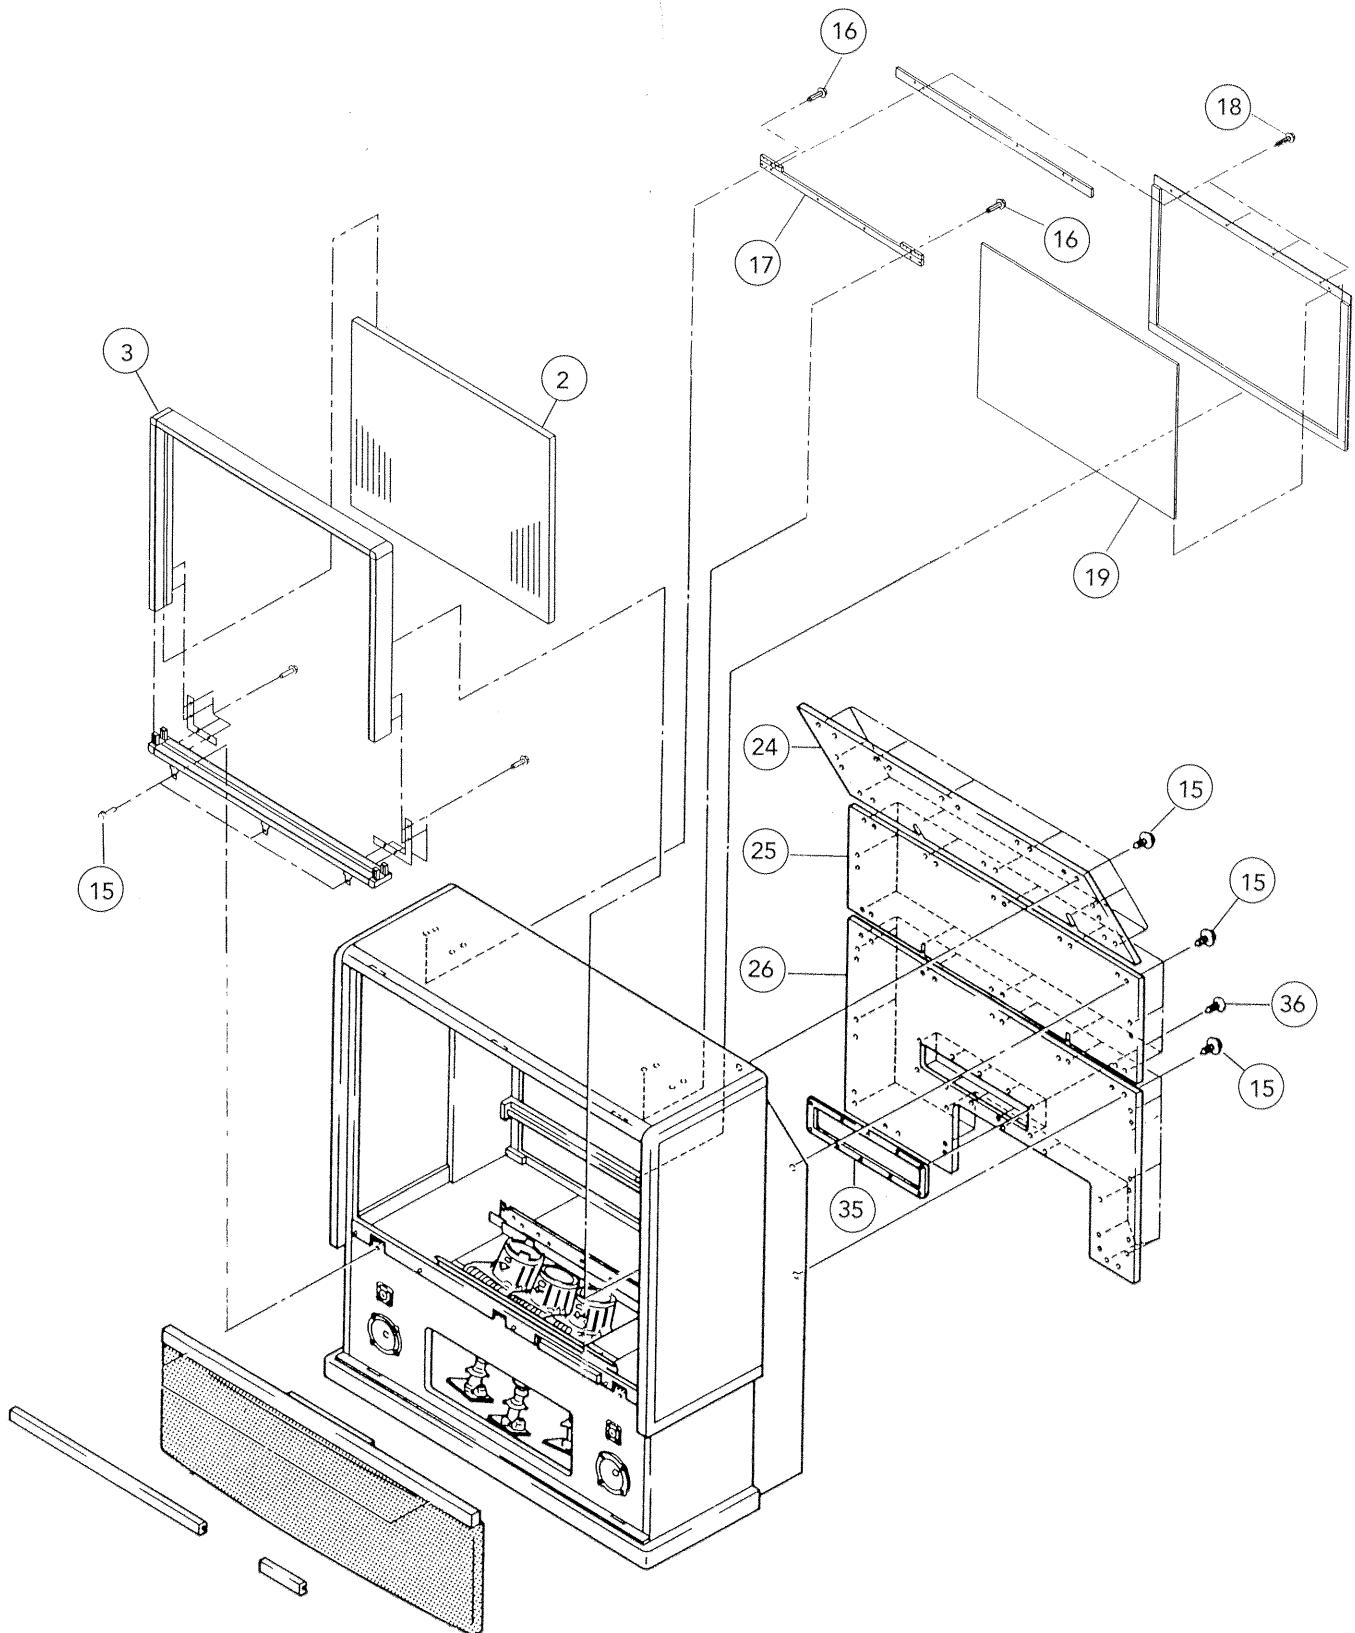


**Note:** Some parts may appear different than those shown in the exploded view. When ordering, refer to the REPLACEMENT PARTS LIST for correct part number. Since this Service Manual covers several models, use care to select the correct part for the model being serviced.

**EXPLODED VIEW (1 / 3)**  
**(50SX5P)**

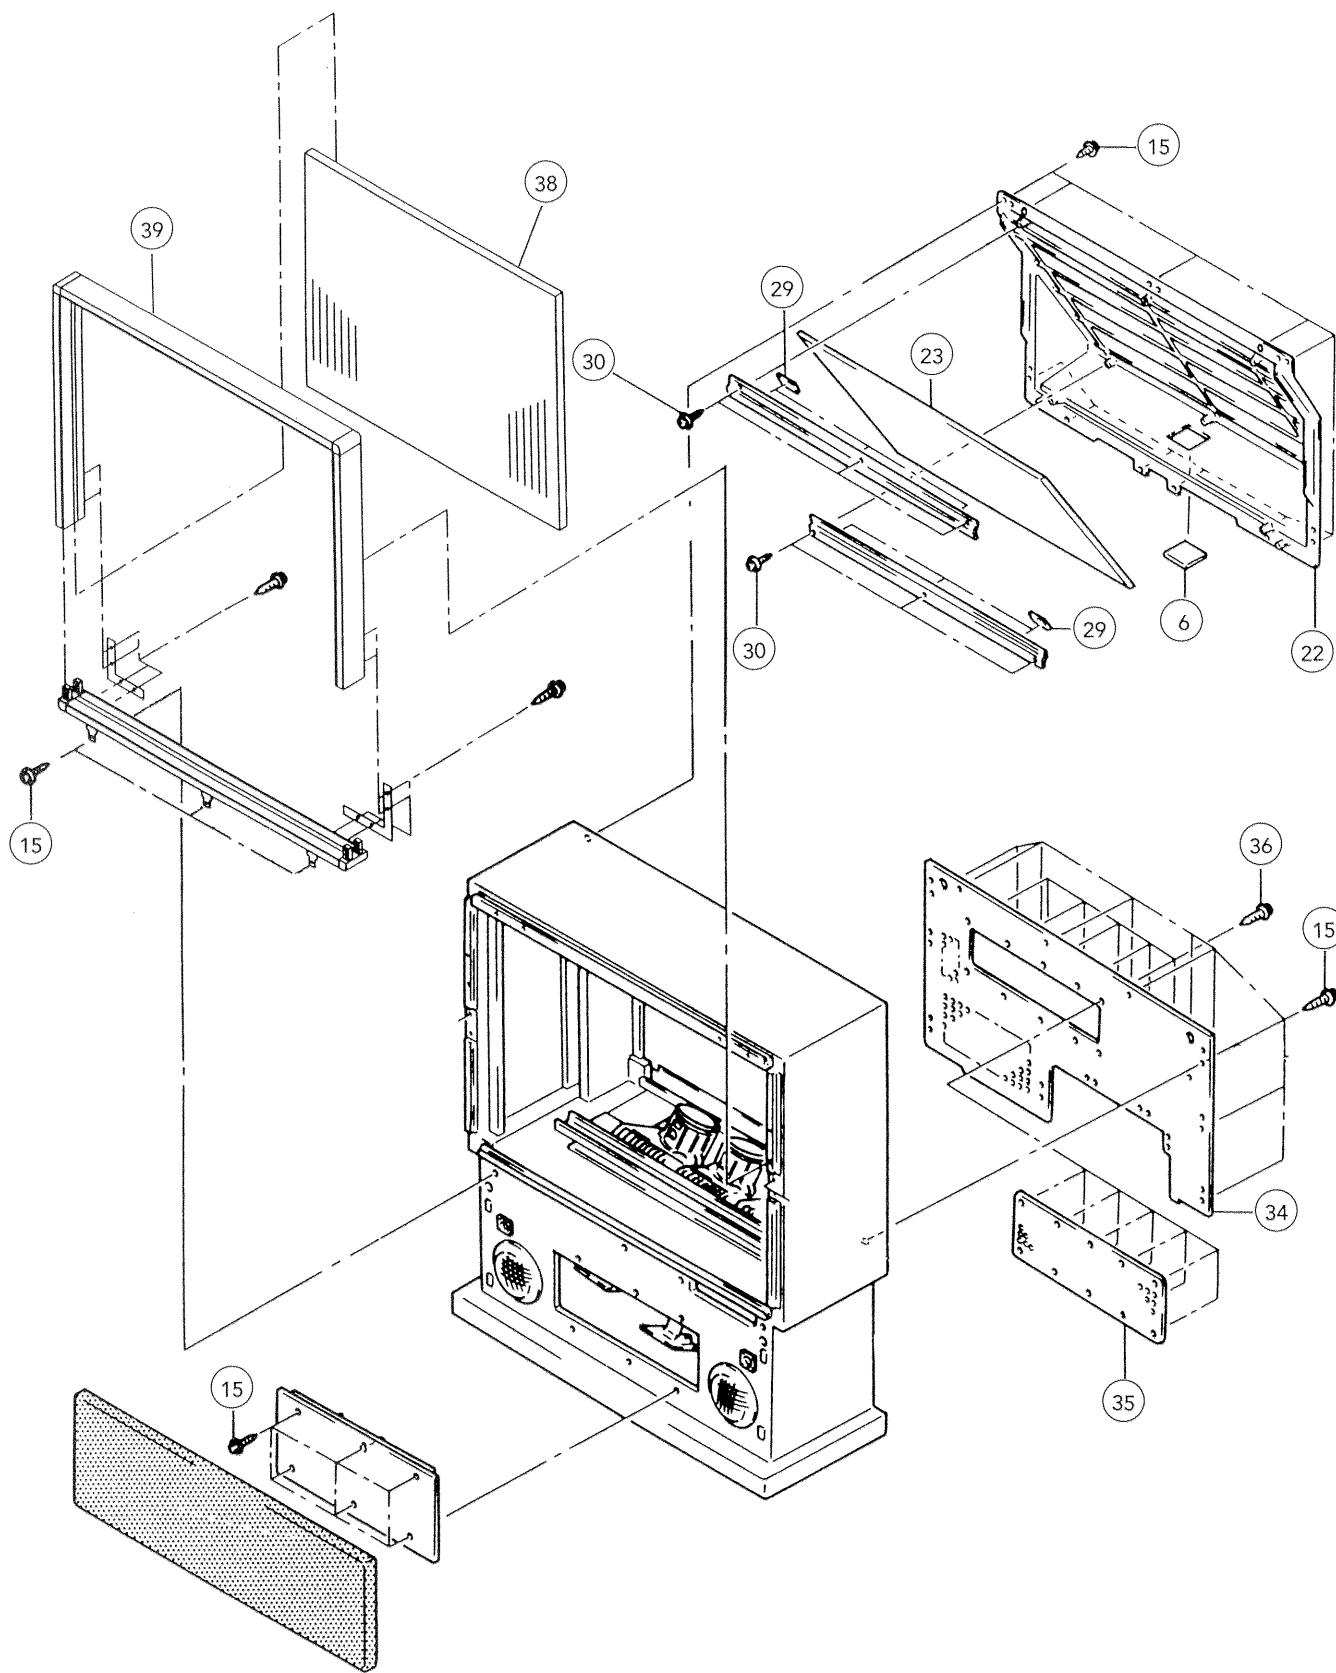


**Note:** Some parts may appear different than those shown in the exploded view. When ordering, refer to the REPLACEMENT PARTS LIST for correct part number. Since this Service Manual covers several models, use care to select the correct part for the model being serviced.

## EXPLODED VIEW (2 / 3)

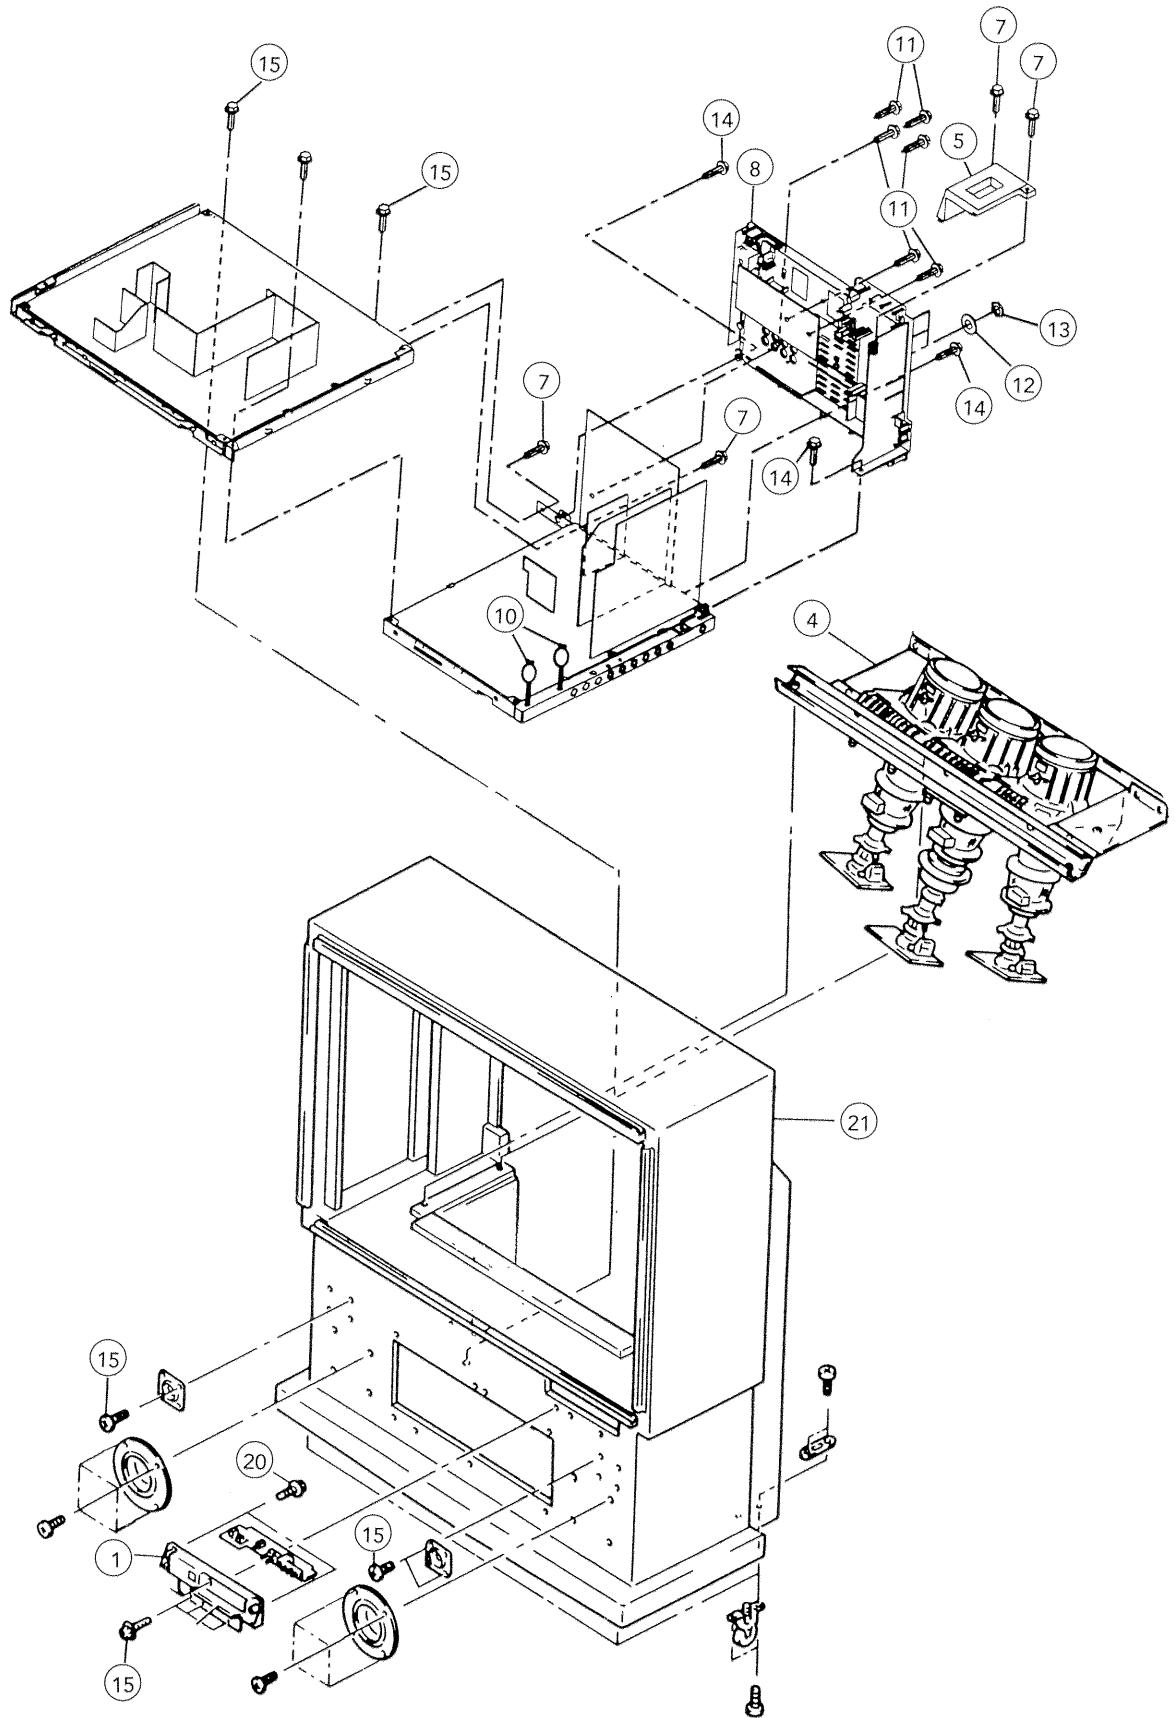

**Note:** Some parts may appear different than those shown in the exploded view. When ordering, refer to the REPLACEMENT PARTS LIST for correct part number. Since this Service Manual covers several models, use care to select the correct part for the model being serviced.

### EXPLODED VIEW (3 / 3)

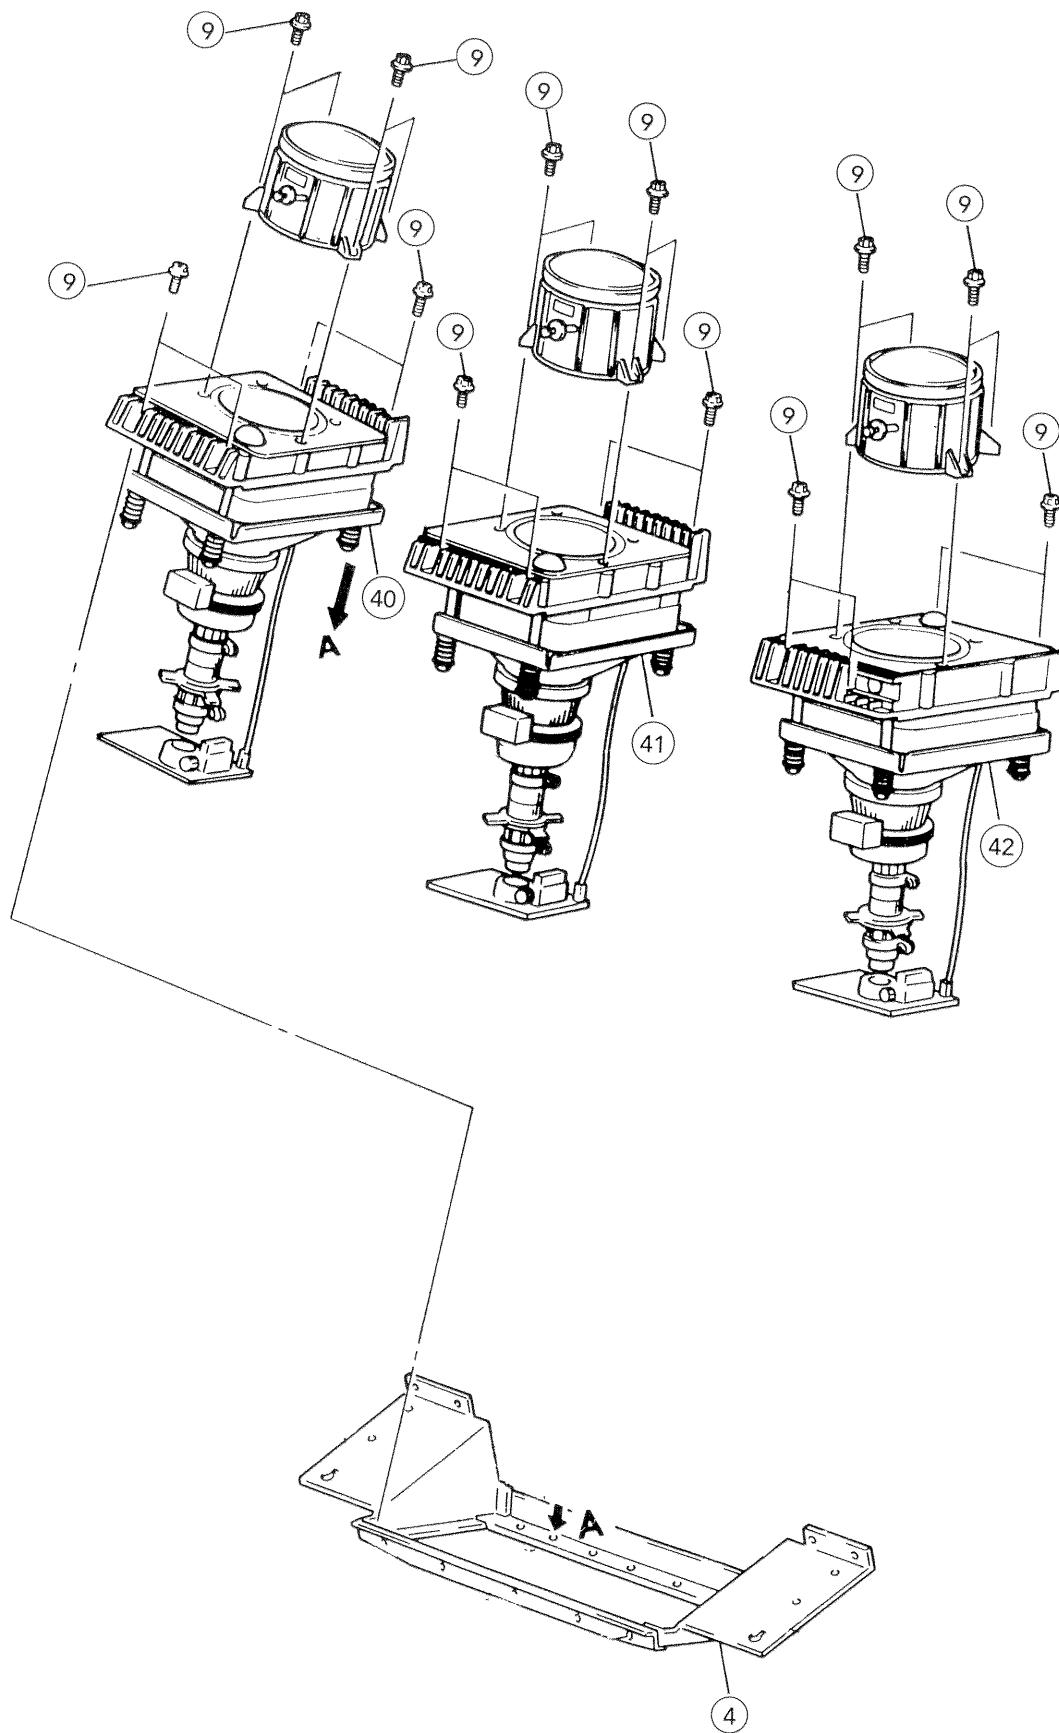

**Note:** Some parts may appear different than those shown in the exploded view. When ordering, refer to the REPLACEMENT PARTS LIST for correct part number. Since this Service Manual covers several models, use care to select the correct part for the model being serviced.

## REPLACEMENT PARTS LIST

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

ABBREVIATION	Capacitors..... CD:Ceramic Disc, PF:Polyester Film, EL: Electrolytic, PP: Polypropylene, PR: Paper, TA: Tantalum, TM: Trimmer Resistors..... CF: Carbon Film, CC: Carbon Composition, MF: Metal oxide Film, VR: Variable Resistor, WW: Wire Wound, FR: Fuse Resistor, MG: Metal Glazed Semiconductors.... TR: Transistor, DI: diode, ZD: Zener Diode, VA: Varistor, TH: Thermistor, IC: Integrated Circuit
NOTE: Componenets marked with the " * " symbol are for the AP34 chassis only, " + " are for the AP33B chassis only.	

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
		CAPACITORS	C0054	0800039	CAPACITOR ELECTROLYTIC 47MF 10V
C0001	0800048	CAPACITOR ELECTROLYTIC 100MF 10V	C0055	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C0002	02441711	CD 0.01MF +80-20% 50V	C0056	0800048	CAPACITOR ELECTROLYTIC 100MF 10V
C0005	02441711	CD 0.01MF +80-20% 50V	C0057	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0006	0880057	POLYESTER FILM 0.1MF +-10% 50V	C0058	0890071	CAPACITOR CERAMIC DISCAL 56PF +-5% 50V
C0009	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0059	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V
C0010	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0060	0890079R	CAPACITOR,CERAMIC DISCAL 270PF +-10% 50V
C0011	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0061	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C0012	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0062	02441711	CD 0.01MF +80-20% 50V
C0013	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0064	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0014	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0065	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0015	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0066	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0018	0880048	POLYESTER FILM 0.022MF +-10% 50V	C0067	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0019	0800023	CAPACITOR ELECTROLYTIC 22MF 16V	C0068	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0020	0890087	CERAMIC DISCAL 1000PF +-10% 50V	C0069	0890074	CAPACITOR CERAMIC DISCAL 100PF +-5% 50V
C0021	0880057	POLYESTER FILM 0.1MF +-10% 50V	C0070	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C0022	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C0071	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C0023	0890067	CERAMIC DISCAL 33PF +-5% 50V	C0074	08000741	CAPACITOR ELECTROLYTIC 470MF 16V
C0024	0890067	CERAMIC DISCAL 33PF +-5% 50V	C0076	0890033	CAPACITOR,CERAMIC DISCAL 680PF +-10% 50V
C0025	0880053	POLYESTER FILM 0.047MF +-10% 50V	C0077	0890077	CAPACITOR CERAMIC DISCAL 180PF +-10% 50V
C0027	0880051	POLYESTER FILM 0.033MF +-10% 50V	C0501	0800023	CAPACITOR ELECTROLYTIC 22MF 16V
C0031	0800048	CAPACITOR ELECTROLYTIC 100MF 10V	C0502	02441711	CD 0.01MF +80-20% 50V
C0032	02441711	CD 0.01MF +80-20% 50V	C0503	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C0033	0890074	CERAMIC DISCAL 100PF +-5% 50V	C0504	02441711	CD 0.01MF +80-20% 50V
C0034	0880051	POLYESTER FILM 0.033MF +-10% 50V	C0505	02441711	CD 0.01MF +80-20% 50V
C0035	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C0510	0880011	CAPACITOR POLYESTER FILM 0.015MF +-10% 50V
C0037	0890069	CERAMIC DISCAL 47PF +-5% 50V	C0511	0880013	CAPACITOR POLYESTER FILM 0.033MF +-10% 50V
C0038	0800048	CAPACITOR ELECTROLYTIC 100MF 10V	C0512	0880006	CAPACITOR POLYESTER FILM 3300PF +-10% 50V
C0039	02441711	CD 0.01MF +80-20% 50V	C0513	0880006	CAPACITOR POLYESTER FILM 3300PF +-10% 50V
C0040	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C0514	0880016	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0041	0880046	POLYESTER FILM 0.015MF +-10% 50V	C0515	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C0042	02441071	CD 3300PF +-10% 50V	C0516	0880016	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0045	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C0961	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0046	0890067	CERAMIC DISCAL 33PF +-5% 50V	C0962	0800075	CAPACITOR ELECTROLYTIC 470MF 25V
C0047	0890067	CERAMIC DISCAL 33PF +-5% 50V	C0963	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0048	0800048	CAPACITOR ELECTROLYTIC 100MF 10V	C0964	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0049	02441711	CD 0.01MF +80-20% 50V	C0965	0800075	CAPACITOR ELECTROLYTIC 470MF 25V
C0052	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C0966	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C0053	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C0967	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
			C0968	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
			C0969	0800075	CAPACITOR ELECTROLYTIC 470MF 25V

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C1101	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C1393	02486881	CD 150PF +-5% 50V
C1102	02441411	CD 0.01MF +-10% 50V	C1394	02486881	CD 150PF +-5% 50V
C1103	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C1395	02486881	CD 150PF +-5% 50V
C1104	02441411	CD 0.01MF +-10% 50V	C1501	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C1106	0880057	POLYESTER FILM 0.1MF +-10% 50V	C1502	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C1109	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C1517	0880044	POLYESTER FILM 0.01MF +-10% 50V
C1117	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C1520	0880044	POLYESTER FILM 0.01MF +-10% 50V
C1118	0880057	POLYESTER FILM 0.1MF +-10% 50V	C1523	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C1119	0880057	POLYESTER FILM 0.1MF +-10% 50V	C1526	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C1120	0800087	CAPACITOR ELECTROLYTIC 2200MF 16V	C2401	0284623R	EL 1MF 50V
C1122	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C2420	0880031	CAPACITOR POLYESTER FILM 1000PF +-10% 50V
C1123	02441411	CD 0.01MF +-10% 50V	C3006	02441711	CD 0.01MF +80-20% 50V
*C1201	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3007	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1202	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3010	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1226	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3013	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1227	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3014	0284638	EL 10MF 16V
*C1251	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3016	0284638	EL 10MF 16V
*C1252	0890074	CERAMIC DISCAL 100PF +-5% 50V	C3018	02441711	CD 0.01MF +80-20% 50V
*C1260	0800053	CAPACITOR ELECTROLYTIC 100MF 50V	C3019	0800023	CAPACITOR ELECTROLYTIC 22MF 16V
*C1261	02441411	CD 0.01MF +-10% 50V	C3021	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1262	0800053	CAPACITOR ELECTROLYTIC 100MF 50V	C3024	0800047	CAPACITOR ELECTROLYTIC 100MF 6.3V
*C1263	02441411	CD 0.01MF +-10% 50V	C3025	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
*C1264	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C3026	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1265	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C3027	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
*C1276	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C3028	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
*C1277	0880062	POLYESTER FILM 0.22MF +-10% 50V	C3029	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
*C1278	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C3030	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1279	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C3031	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
*C1280	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C3032	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
*C1281	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C3038	02441711	CD 0.01MF +80-20% 50V
*C1282	0244109	CD 4700PF +-10% 50V	C3039	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
*C1291	0299993	PP 0.018MF 630V	C3040	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
*C1292	0299996	PP 0.033MF,+-5% 630V	C3041	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
*C1293	0299615F	PF 2700PF +-5% 630V	C3042	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1301	02486881	CD 150PF +-5% 50V	C3043	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C1302	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3044	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1311	02486881	CD 150PF +-5% 50V	C3045	0800023	CAPACITOR ELECTROLYTIC 22MF 16V
C1312	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3047	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1326	02486881	CD 150PF +-5% 50V	C3048	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C1327	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3049	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C1336	02486881	CD 150PF +-5% 50V	C3051	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C1337	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3052	08000741	CAPACITOR ELECTROLYTIC 470MF 16V
C1351	02486881	CD 150PF +-5% 50V	C3055	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1352	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3056	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1361	02486881	CD 150PF +-5% 50V	C3058	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C1362	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	C3059	0284638	EL 10MF 16V
C1387	258178G	EL 470MF,63V	C3060	02441711	CD 0.01MF +80-20% 50V
C1389	258178G	EL 470MF,63V	C3061	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C1390	02486881	CD 150PF +-5% 50V	C3062	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C1391	02486881	CD 150PF +-5% 50V	C3063	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C1392	02486881	CD 150PF +-5% 50V	C3064	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C3065	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4013	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V
C3066	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4014	0292714F	TA 10MF +-10% 16V
C3067	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C4015	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C3068	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C4016	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
C308	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4017	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3504	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C4018	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V
C3505	02441711	CD 0.01MF +80-20% 50V	C4019	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3508	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4020	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V
C3509	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4021	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
C3515	02441711	CD 0.01MF +80-20% 50V	C4022	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3516	02441711	CD 0.01MF +80-20% 50V	C4023	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V
C3517	02441711	CD 0.01MF +80-20% 50V	C4024	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3518	02441711	CD 0.01MF +80-20% 50V	C4025	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V
C3519	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C4026	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C3520	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C403	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3521	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4038	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C3522	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C4039	08000741	CAPACITOR ELECTROLYTIC 470MF 16V
C3523	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C404	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3524	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4040	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C3525	02441711	CD 0.01MF +80-20% 50V	C4041	0253943	EL 0.33MF 50V
C3526	02441711	CD 0.01MF +80-20% 50V	C4042	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C3527	02441711	CD 0.01MF +80-20% 50V	C4043	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C3528	02441711	CD 0.01MF +80-20% 50V	C4044	0253943	EL 0.33MF 50V
C3530	0800023	CAPACITOR ELECTROLYTIC 22MF 16V	C4045	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C3531	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4046	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C3532	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4047	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C3534	02441711	CD 0.01MF +80-20% 50V	C4048	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C3536	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V	C405	02441051	CD 2200PF +-10% 50V
C3537	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4054	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C3538	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4055	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C3539	08900751	CAPACITOR CERAMIC DISCAL 120PF +-5% 50V	C4056	0890069	CAPACITOR,CERAMIC DISCAL 47PF +-5% 50V
C3540	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C4057	0890069	CAPACITOR,CERAMIC DISCAL 47PF +-5% 50V
C3801	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4058	0800048	CAPACITOR ELECTROLYTIC 100MF 10V
C3802	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4059	0292712F	TA 3.3MF 16V
C3803	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C406	02441051	CD 2200PF +-10% 50V
C3804	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4060	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C3805	02441711	CD 0.01MF +80-20% 50V	C4061	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C3806	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4062	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
C3807	02441711	CD 0.01MF +80-20% 50V	C4063	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
C4001	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C4064	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4002	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4065	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4003	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C4071	08000741	CAPACITOR ELECTROLYTIC 470MF 16V
C4004	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V	C4072	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4005	08000741	CAPACITOR ELECTROLYTIC 470MF 16V	C4073	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4006	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V	C4075	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4007	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V	C4076	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4008	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	C4077	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4009	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V	C408	0800051	CAPACITOR ELECTROLYTIC 100MF 25V
C4010	0800005	CAPACITOR,ELECTROLYTIC 2.2MF 50V	C409	0800042	CAPACITOR ELECTROLYTIC 47MF 25V
C4011	0800007	CAPACITOR,ELECTROLYTIC 3.3MF 50V	C412	0800042	CAPACITOR ELECTROLYTIC 47MF 25V
C4012	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V	C414	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C416	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4638	0890085	CAPACITOR CERAMIC DISCAL 680PF +-10% 50V
C417	0800084	CAPACITOR ELECTROLYTIC 1000MF 35V	C4639	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C418	0258192F	EL 2200MF 25V	C4640	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C420	0258192F	EL 2200MF 25V	C4641	0284638	EL 10MF 16V
C421	0880062	CAPACITOR POLYESTER FILM 0.22MF +-10% 50V	C4642	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C422	0800042	CAPACITOR ELECTROLYTIC 47MF 25V	C4643	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V
C424	0800051	CAPACITOR ELECTROLYTIC 100MF 25V	C4644	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C425	02441711	CD 0.01MF +80-20% 50V	C4645	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C427	0800087	CAPACITOR ELECTROLYTIC 2200MF 16V	C4646	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C428	0800087	CAPACITOR ELECTROLYTIC 2200MF 16V	C4649	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C430	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C4650	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C433	0800087	CAPACITOR ELECTROLYTIC 2200MF 16V	C4655	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C434	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C4656	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V
C435	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4657	0284638	EL 10MF 16V
C436	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C4658	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C437	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4659	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4501	0258616	EL 2.2MF 50V	C4660	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4502	0258616	EL 2.2MF 50V	C4661	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V
C4605	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4662	0890076	CAPACITOR CERAMIC DISCAL 150PF +-10% 50V
C4606	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C4663	0880048	CAPACITOR POLYESTER FILM 0.022MF +-10% 50V
C4607	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C4664	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V
C4608	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C4665	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V
C4609	0284638	EL 10MF 16V	C4666	08000741	CAPACITOR ELECTROLYTIC 470MF 16V
C4610	0284638	EL 10MF 16V	C4667	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V
C4611	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V	C4668	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V
C4612	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4669	0880048	CAPACITOR POLYESTER FILM 0.022MF +-10% 50V
C4613	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4670	0890076	CAPACITOR CERAMIC DISCAL 150PF +-10% 50V
C4614	0890085	CAPACITOR CERAMIC DISCAL 680PF +-10% 50V	C4671	0800058	CAPACITOR ELECTROLYTIC 220MF 16V
C4615	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V	C4672	0800058	CAPACITOR ELECTROLYTIC 220MF 16V
C4616	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V	C4673	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C4617	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V	C4674	0800058	CAPACITOR ELECTROLYTIC 220MF 16V
C4618	0800007	CAPACITOR,ELECTROLYTIC 3.3MF 50V	C4675	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C4619	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V	C4676	0800058	CAPACITOR ELECTROLYTIC 220MF 16V
C4620	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V	C4677	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C4621	0800007	CAPACITOR,ELECTROLYTIC 3.3MF 50V	C4678	0890119	CAPACITOR CERAMIC DISCAL 27PF +-5% 50V
C4622	0880059	CAPACITOR POLYESTER FILM 0.15MF 50V	C4679	0890119	CAPACITOR CERAMIC DISCAL 27PF +-5% 50V
C4623	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V	C4680	0800103	CAPACITOR ELECTROLYTIC 0.22MF 50V
C4624	0800012	CAPACITOR ELECTROLYTIC 4.7MF 50V	C4681	0880055	CAPACITOR POLYESTER FILM 0.068MF +-10% 50V
C4625	0890085	CAPACITOR CERAMIC DISCAL 680PF +-10% 50V	C4682	0880038R	CAPACITOR POLYESTER FILM 3900PF +-10% 50V
C4626	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4683	0880039	CAPACITOR POLYESTER FILM 4700PF +-10% 50V
C4627	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4684	0880051	CAPACITOR POLYESTER FILM 0.033MF +-10% 50V
C4628	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V	C4685	0284638	EL 10MF 16V
C4629	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C4686	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C4630	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C4687	0284638	EL 10MF 16V
C4631	0880066	CAPACITOR POLYESTER FILM 0.47MF +-10% 50V	C4688	0284638	EL 10MF 16V
C4632	0284638	EL 10MF 16V	C4689	0284638	EL 10MF 16V
C4633	0284638	EL 10MF 16V	C4690	0880041	CAPACITOR POLYESTER FILM 5600PF +-10% 50V
C4634	0284638	EL 10MF 16V	C4691	0890084	CAPACITOR CERAMIC DISCAL 560PF +-10% 50V
C4635	0284638	EL 10MF 16V	C4692	0880042	CAPACITOR POLYESTER FILM 6800PF +-10% 50V
C4636	0880046	CAPACITOR POLYESTER FILM 0.015MF +-10% 50V	C4693	0284638	EL 10MF 16V
C4637	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C4694	0284638	EL 10MF 16V

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C4695	0880062	CAPACITOR POLYESTER FILM 0.22MF +-10% 50V	C5517	0800001	CAPACITOR ELECTROLYTIC 0.47MF 50V
C4696	0284638	EL 10MF 16V	C5518	02441711	CD 0.01MF +80-20% 50V
C4697	0890085	CAPACITOR CERAMIC DISCAL 680PF +-10% 50V	C5519	02441711	CD 0.01MF +80-20% 50V
C4698	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C5520	02441711	CD 0.01MF +80-20% 50V
C4699	0252396	EL 10MF 16V	C5521	02441711	CD 0.01MF +80-20% 50V
C4700	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C5522	02441711	CD 0.01MF +80-20% 50V
C4701	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V	C5523	02441711	CD 0.01MF +80-20% 50V
C4702	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C5524	02441711	CD 0.01MF +80-20% 50V
C4703	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C5525	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4704	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C5526	02441071	CD 3300PF +-10% 50V
C4705	0800105	CAPACITOR ELECTROLYTIC 0.33MF 50V	C5527	02441711	CD 0.01MF +80-20% 50V
C4706	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C5529	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C4707	0252396	EL 10MF 16V	C5530	0890079R	CAPACITOR,CERAMIC DISCAL 270PF +-10% 50V
C4708	0800042	CAPACITOR ELECTROLYTIC 47MF 25V	C5531	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V
C4709	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C5533	0880047	CAPACITOR POLYESTER FILM 0.018MF +-10% 50V
C4710	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C5535	0800005	CAPACITOR,ELECTROLYTIC 2.2MF 50V
C4711	0800042	CAPACITOR ELECTROLYTIC 47MF 25V	C5536	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C4712	0800059	CAPACITOR ELECTROLYTIC 220MF 25V	C5538	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C4713	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C5539	02441711	CD 0.01MF +80-20% 50V
C4714	0252969	EL 2200MF 25V	C5540	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C4715	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C5545	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
C4716	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C5546	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C4717	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C5547	02441711	CD 0.01MF +80-20% 50V
C4718	0800083	CAPACITOR ELECTROLYTIC 1000MF 25V	C5548	0800058	CAPACITOR ELECTROLYTIC 220MF 16V
C4719	0800083	CAPACITOR ELECTROLYTIC 1000MF 25V	C5901	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
C4722	0800042	CAPACITOR ELECTROLYTIC 47MF 25V	C5902	02441711	CD 0.01MF +80-20% 50V
C4726	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C5904	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C4727	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C5905	0284638	EL 10MF 16V
C4728	0284638	EL 10MF 16V	C5906	0890089	CAPACITOR CERAMIC DISCAL 1500PF +-10% 50V
C4729	0284638	EL 10MF 16V	C604	0800023	CAPACITOR ELECTROLYTIC 22MF 16V
C4731	0880062	CAPACITOR POLYESTER FILM 0.22MF +-10% 50V	C605	0284647R	EL 22MF 16V
C4732	0284623R	EL 1MF 50V	C606	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C4733	0284623R	EL 1MF 50V	C608	0284446R	EL 1MF 50V
C4734	0880031	CAPACITOR POLYESTER FILM 1000PF +-10% 50V	C609	0284446R	EL 1MF 50V
C4735	0880031	CAPACITOR POLYESTER FILM 1000PF +-10% 50V	C610	0880062	CAPACITOR POLYESTER FILM 0.22MF +-10% 50V
C4736	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C611	0800041	CAPACITOR ELECTROLYTIC 47MF 16V
C4739	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C612	0284647R	EL 22MF 16V
C4740	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C613	0244109	CD 4700PF +-10% 50V
C5503	02441711	CD 0.01MF +80-20% 50V	C620	0800003	CAPACITOR ELECTROLYTIC 1MF 50V
C5504	02464481	CD 22PF +-5% 50V	C621	0284449R	EL 4.7MF 50V
C5505	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	+C630	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C5506	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	+C631	0880062	CAPACITOR POLYESTER FILM 0.22MF +-10% 50V
C5507	02441711	CD 0.01MF +80-20% 50V	+C632	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C5508	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	+C633	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C5510	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C651	0279859	PF 0.1MF +-10% 100V
C5511	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C652	0880051	CAPACITOR POLYESTER FILM 0.033MF +-10% 50V
C5512	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C653	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C5513	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C654	0800069	CAPACITOR,ELECTROLYTIC 330MF 50V
C5514	02441711	CD 0.01MF +80-20% 50V	C655	0252969	EL 2200MF 25V
C5515	02441711	CD 0.01MF +80-20% 50V	C656	0800069	CAPACITOR,ELECTROLYTIC 330MF 50V
C5516	0890116	CAPACITOR CERAMIC DISCAL 15PF +-5% 50V	C658	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C659	0284446R	EL 1MF 50V	C801G	0257543	EL 3.3MF 315V
 C660	0298261R	TA 1MF +-10% 35V	C804B	0244889	CD 2200PF +-10% 2KV
C664	0800067	CAPACITOR,ELECTROLYTIC 330MF 25V	C804G	0244889	CD 2200PF +-10% 2KV
C668	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C804R	0244889	CD 2200PF +-10% 2KV
C669	0800043	CAPACITOR ELECTROLYTIC 47MF 35V	C805B	0800326	CAPACITOR ELECTROLYTIC 100MF 16V
C701	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C805G	0800326	CAPACITOR ELECTROLYTIC 100MF 16V
C711	0299926	PP 0.1MF +-10% 200V	C805R	0800326	CAPACITOR ELECTROLYTIC 100MF 16V
C713	0244501	CD 1000PF +-10% 500V	C806B	0244501	CD 1000PF +-10% 500V
C714	0243507	CD 330PF +-10% 500V	C807B	02441051	CD 2200PF +-10% 50V
C715	0890028	CAPACITOR CERAMIC DISCAL 330PF +-10% 50V	C807G	02441051	CD 2200PF +-10% 50V
 C716	0299929	PP 0.18MF +-10% 200V	C807R	02441051	CD 2200PF +-10% 50V
 C717	0262426F	PP 9100PF +-5% 1.8KV	C808B	0244120	CD 820PF +-10% 50V
 C718	0262415F	PP 3600PF +-5% 1.8KV	C808G	0244102	CD 1200PF +-10% 50V
 C719	0299929	PP 0.18MF +-10% 200V	C808R	0244139	CD 1000PF +-10% 50V
 C720	0299929	PP 0.18MF +-10% 200V	C809B	0244227R	CD 100PF +-10% 50V
 C721	0299918	PP 0.022MF +-10% 200V	 C901	0279718	PF 0.1MF +-10% 125V
C722	0259473	EL 6.8MF 25V	 C902	0279718	PF 0.1MF +-10% 125V
 C723	0244209	CD 680PF +-10% 1600V	 C903	0248593F	CD 4700PF +80-20% 250V
 +C723	0244211F	CD 1000PF +-10% 2KV	 C904	0248593F	CD 4700PF +80-20% 250V
C724	0259153	EL 220MF 160V	 C905	0248593F	CD 4700PF +80-20% 250V
C726	0284634R	EL 4.7MF 50V	 C906	0248593F	CD 4700PF +80-20% 250V
C727	0244504	CD 1800PF +-10% 500V	C907	0259167	EL 820MF 200V
C729	0253983F	EL 33MF	C908	0259167	EL 820MF 200V
C731	0800053	CAPACITOR ELECTROLYTIC 100MF 50V	 C909	0249486	CD 2200PF +-20%
C732	0299636	PP 0.068MF +-5% 1600V	C911	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V
C738	0243510	CD 560PF +-10% 500V	C912	0800067	CAPACITOR,ELECTROLYTIC 330MF 25V
C739	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	C913	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C743	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	C914	0880035	CAPACITOR POLYESTER FILM 2200PF +-10% 50V
C744	0880048	CAPACITOR POLYESTER FILM 0.022MF +-10% 50V	C915	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
C745	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	C916	0299981	PP 0.01MF +-5% 630V
C750	0890087	CAPACITOR CERAMIC DISCAL 1000PF +-10% 50V	C917	0880031	CAPACITOR POLYESTER FILM 1000PF +-10% 50V
C752	0890084	CAPACITOR CERAMIC DISCAL 560PF +-10% 50V	C918	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V
C753	0880051	CAPACITOR POLYESTER FILM 0.033MF +-10% 50V	 C920	0249487	CD 3300PF +-20%
C755	0244109	CD 4700PF +-10% 50V	C931	0800075	CAPACITOR ELECTROLYTIC 470MF 25V
C760	0243503	CD 150PF +-10% 500V	C932	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V
C763	0890089	CAPACITOR CERAMIC DISCAL 1500PF +-10% 50V	C933	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V
+C770	0890082R	CAPACITOR CERAMIC DISCAL 390PF +-10% 50V	C941	0258175	EL 470MF 31.5V
+C771	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	C942	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V
+C772	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C943	02441051	CD 2200PF +-10% 50V
+C773	0284642R	EL 10MF 50V	C944	0258178G	EL 470MF,63V
+C775	0880041	CAPACITOR POLYESTER FILM 5600PF +-10% 50V	C945	0284439F	EL 470MF 35V
+C776	08900831	CAPACITOR CERAMIC DISCAL 470PF +-10% 50V	C947	0800043	CAPACITOR ELECTROLYTIC 47MF 35V
+C781	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C948	0800043	CAPACITOR ELECTROLYTIC 47MF 35V
+C790	08000741	CAPACITOR ELECTROLYTIC 470MF 16V	C949	0258178G	EL 470MF,63V
+C791	08000741	CAPACITOR ELECTROLYTIC 470MF 16V	C950	0284439F	EL 470MF 35V
+C792	0252396	EL 10MF 16V	C952	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
+C793	0800015	CAPACITOR,ELECTROLYTIC 10MF 16V	C953	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V
+C794	0244109	CD 4700PF +-10% 50V	C954	0800042	CAPACITOR ELECTROLYTIC 47MF 25V
C795	0284449R	EL 4.7MF 50V	C956	0258175	EL 470MF 31.5V
C796	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	C957	0258179G	EL 1000MF,6
C797	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	C958	0258175	EL 470MF 31.5V

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
C959	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	R0045	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
C960	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	R0046	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
C981	0880057	CAPACITOR POLYESTER FILM 0.1MF +-10% 50V	R0047	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
C982	0800018	CAPACITOR ELECTROLYTIC 10MF 50V	R0048	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
C983	0800044	CAPACITOR ELECTROLYTIC 47MF 50V	R0049	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
C984	0258697	EL 470MF 160V	R0050	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
C985	0800041	CAPACITOR ELECTROLYTIC 47MF 16V	R0051	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
C986	0800023	CAPACITOR ELECTROLYTIC 22MF 16V	R0052	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
C987	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	R0053	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
C989	0800003	CAPACITOR ELECTROLYTIC 1MF 50V	R0054	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
C990	0800082	CAPACITOR ELECTROLYTIC 1000MF 16V	R0055	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
C991	0258121R	EL 2.2MF 100V	R0056	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
C992	0880044	CAPACITOR POLYESTER FILM 0.01MF +-10% 50V	R0057	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
C994	0800049	CAPACITOR,ELECTROLYTIC 100MF 16V	R0059	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
C995	0800009	CAPACITOR ELECTROLYTIC 4.7MF 25V	R0060	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
		RESISTORS	R0061	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
			R0062	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
			R0063	0700031	RESISTOR,CARBON FILM 180 OHM +-5% 1/16W
R0001	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0064	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R0002	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0065	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
R0003	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R0067	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R0004	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0068	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W
R0005	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0069	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0006	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R0070	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0008	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R0071	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0009	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R0073	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0010	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R0074	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R0011	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W	R0075	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0012	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W	R0076	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R0013	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W	R0077	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0015	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R0078	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R0016	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R0079	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0017	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R0080	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0018	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R0081	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0019	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R0082	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0020	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R0083	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0021	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R0084	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0031	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0085	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0032	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0086	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0033	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R0087	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0034	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0088	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0035	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0089	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0036	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0090	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0037	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0091	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0038	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0092	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0039	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R0093	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0040	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0094	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0041	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0095	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0042	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0096	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R0043	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0097	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0044	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R0098	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R0099	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0161	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0100	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R0162	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R0101	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0163	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0102	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R0164	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0103	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0165	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R0104	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0166	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R0105	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0167	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0106	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0168	0100065	CF 1K OHM +-5% 1/8W
R0107	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R0169	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
R0108	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0170	0100097	CF 22K OHM +-5% 1/8W
R0109	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R0171	0100066	CF 1.1K OHM +-5% 1/8W
R0110	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0172	0100041	CF 100 OHM +-5% 1/8W
R0111	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0173	0100065	CF 1K OHM +-5% 1/8W
R0112	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0174	0100065	CF 1K OHM +-5% 1/8W
R0113	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0176	0100065	CF 1K OHM +-5% 1/8W
R0114	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R0177	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0115	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R0178	0700065	RESISTOR,CARBON FILM 68K OHM +-5% 1/16W
R0116	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0179	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0117	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0180	0100065	CF 1K OHM +-5% 1/8W
R0118	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0182	0700022	RESISTOR,CARBON FILM 39 OHM +-5% 1/16W
R0120	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R0186	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R0121	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R0187	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0122	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0188	0150287	VR 10K OHM-B
R0123	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0189	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0124	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0190	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0125	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0191	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0126	0700065	RESISTOR,CARBON FILM 68K OHM +-5% 1/16W	R0192	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0127	0119635	MF 15K OHM +-1% 1/8W	R0193	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0128	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R0194	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0129	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W	R0195	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0130	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	R0196	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0131	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R0197	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0132	0700022	RESISTOR,CARBON FILM 39 OHM +-5% 1/16W	R0198	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0133	0100065	CF 1K OHM +-5% 1/8W	R0199	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0136	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W	R0200	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R0137	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0202	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R0138	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0203	0187064	CF 910 OHM +-5% 1/16W
R0139	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0204	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R0140	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0205	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R0141	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R0206	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R0146	0100053	CF 330 OHM +-5% 1/8W	R0207	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W
R0148	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W	R0208	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W
R0149	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W	R0209	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W
R0150	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W	R0211	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0151	0100067	CF 1.2K OHM +-5% 1/8W	R0212	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0152	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0213	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R0153	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0214	0114149	CF 560 OHM +-5% 1/4W
R0154	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0215	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0155	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0216	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0159	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R0220	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R0160	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W	R0223	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R0224	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1208	0100081	CF 4.7K OHM +-5% 1/8W
R0225	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	*R1209	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0227	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	*R1210	0700059	RESISTOR CARBON FILM 27K OHM +-5% 1/16W
R0228	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1226	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R0229	0100121	CF 220K OHM +-5% 1/8W	*R1227	0150136	VR 5K OHM-B
R0230	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	*R1228	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R0231	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	*R1229	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0233	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1231	0113774	CF 10K OHM +-5% 1/2W
R0501	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1232	0113701	CF 10 OHM +-5% 1/2W
R0502	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	*R1233	0100081	CF 4.7K OHM +-5% 1/8W
R0503	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	*R1234	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0504	0100065	CF 1K OHM +-5% 1/8W	*R1235	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0510	0100125	CF 330K OHM +-5% 1/8W	*R1251	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R0511	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1252	0150136	VR 5K OHM-B
R0512	0100125	CF 330K OHM +-5% 1/8W	*R1253	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R0513	0100129	CF 470K OHM +-5% 1/8W	*R1254	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R0516	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1256	0113774	CF 10K OHM +-5% 1/2W
R0517	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W	*R1257	0113701	CF 10 OHM +-5% 1/2W
R0518	0187074	CF 2.4K OHM +-5% 1/16W	*R1258	0100081	CF 4.7K OHM +-5% 1/8W
R0519	0187080	CF 4.3K OHM +-5% 1/16W	*R1259	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0520	0100065	CF 1K OHM +-5% 1/8W	*R1260	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R0521	0114149	CF 560 OHM +-5% 1/4W	*R1276	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W
R0530	0100115	CF 120K OHM +-5% 1/8W	*R1277	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W
R0531	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	*R1278	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R0532	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	*R1279	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0533	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	*R1280	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R0534	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W	*R1281	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R0535	0159922	VR 5K OHM-B	*R1282	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0536	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	*R1283	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R0537	0100121	CF 220K OHM +-5% 1/8W	*R1284	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0538	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	*R1285	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0539	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	*R1286	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R0968	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	*R1291	0110369	MF 10K OHM +-5% 3W
R1101	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	*R1292	0110361	MF 4.7K OHM +-5% 3W
R1102	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	*R1293	0119722	MF 1 OHM +-5% 1W
R1103	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	*R1294	0119722	MF 1 OHM +-5% 1W
R1104	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R1301	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R1107	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R1302	0110229	MF 220 OHM +-5% 2W
R1108	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R1303	0113696	CF 6.8 OHM +-5% 1/2W
R1111	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R1304	0113696	CF 6.8 OHM +-5% 1/2W
R1112	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R1306	0100077	CF 3.3K OHM +-5% 1/8W
R1113	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R1311	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R1114	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R1312	0110225	MF 150 OHM +-5% 2W
R1115	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R1313	0113696	CF 6.8 OHM +-5% 1/2W
R1116	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R1314	0113696	CF 6.8 OHM +-5% 1/2W
*R1201	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R1316	0100077	CF 3.3K OHM +-5% 1/8W
*R1202	0150136	VR 5K OHM-B	R1326	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
*R1203	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R1327	0110229	MF 220 OHM +-5% 2W
*R1204	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R1328	0113696	CF 6.8 OHM +-5% 1/2W
*R1206	0113774	CF 10K OHM +-5% 1/2W	R1329	0113696	CF 6.8 OHM +-5% 1/2W
*R1207	0113701	CF 10 OHM +-5% 1/2W	R1331	0100077	CF 3.3K OHM +-5% 1/8W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R1336	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R2412	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R1337	0110225	MF 150 OHM +-5% 2W	R2413	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
*R1338	0113696	CF 6.8 OHM +-5% 1/2W	R2416	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
+R1338	0113698	CF 8.2 OHM +-5% 1/2W	R2418	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
*R1339	0113696	CF 6.8 OHM +-5% 1/2W	R2420	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
+R1339	0113698	CF 8.2 OHM +-5% 1/2W	R3006	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1341	0100077	CF 3.3K OHM +-5% 1/8W	R3007	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1351	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R3010	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1352	0110229	MF 220 OHM +-5% 2W	R3013	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1353	0113696	CF 6.8 OHM +-5% 1/2W	R3014	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R1354	0113696	CF 6.8 OHM +-5% 1/2W	R3021	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1356	0100077	CF 3.3K OHM +-5% 1/8W	R3024	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1361	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R3025	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R1362	0110225	MF 150 OHM +-5% 2W	R3028	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R1363	0113692	CF 4.7 OHM +-5% 1/2W	R3029	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1364	0113692	CF 4.7 OHM +-5% 1/2W	R3030	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1366	0100077	CF 3.3K OHM +-5% 1/8W	R3031	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R1501	0700044	RESISTOR,CARBON FILM 1.8K OHM +-5% 1/16W	R3032	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R1503	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3033	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R1504	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R3034	01141331	CF 120 OHM +-5% 1/4W
R1505	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3038	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R1508	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3043	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1509	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R3044	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R1510	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3045	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1511	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R3046	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1512	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3047	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R1513	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R3048	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R1514	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3049	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R1515	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R3050	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W
R1516	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R3051	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R1517	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R3053	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R1518	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R3054	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R1519	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R3055	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R1520	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R3056	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R1521	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R3057	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R1522	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R3058	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1523	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R3059	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
*R1524	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R3060	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
+R1524	0700059	RESISTOR CARBON FILM 27K OHM +-5% 1/16W	R3061	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R1525	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R3062	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R1526	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W	R3064	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
*R1527	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R3065	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
+R1527	0700059	RESISTOR CARBON FILM 27K OHM +-5% 1/16W	R3066	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R2401	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3075	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R2402	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3076	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R2403	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3077	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R2404	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3078	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R2405	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3079	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R2406	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R3080	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R2410	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R3081	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R2411	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R3082	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R3083	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R3528	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3084	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3529	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3085	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R353	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3086	0187038	CF 75 OHM +-5% 1/16W	R3531	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R3087	0100123	CF 270K OHM +-5% 1/8W	R3533	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R3088	0100123	CF 270K OHM +-5% 1/8W	R3534	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R3089	0187038	CF 75 OHM +-5% 1/16W	R3536	0700065	RESISTOR,CARBON FILM 68K OHM +-5% 1/16W
R3090	0187038	CF 75 OHM +-5% 1/16W	R3538	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3091	0187038	CF 75 OHM +-5% 1/16W	R3539	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3092	0100123	CF 270K OHM +-5% 1/8W	R354	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W
R3093	0100123	CF 270K OHM +-5% 1/8W	R3540	0150114	VR 10K OHM-B
R3094	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3541	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3095	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3542	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
R3096	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3543	0700059	RESISTOR,CARBON FILM 27K OHM +-5% 1/16W
R3097	0187036M	CF 62OHM +-5% 1/16W	R3546	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R3098	0114141	CF 270 OHM +-5% 1/4W	R3547	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W
R3099	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R355	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W
R3100	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3553	0700033	RESISTOR,CARBON FILM 270 OHM +-5% 1/16W
R3101	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3554	0700044	RESISTOR,CARBON FILM 1.8K OHM +-5% 1/16W
R3112	0100041	CF 100 OHM +-5% 1/8W	R3558	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R3113	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3559	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R3114	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3560	0187088	CF 9.1K OHM +-5% 1/16W
R3115	0100041	CF 100 OHM +-5% 1/8W	R3561	0700059	RESISTOR,CARBON FILM 27K OHM +-5% 1/16W
R3116	0100041	CF 100 OHM +-5% 1/8W	R3562	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R3117	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3563	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3118	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3564	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3119	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3566	0150115	VR 20K OHM-B
R3121	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3567	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3122	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3568	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R3123	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R3570	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R3125	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R3571	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R3127	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R3572	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R3128	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3573	0700059	RESISTOR,CARBON FILM 27K OHM +-5% 1/16W
R3129	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3574	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3130	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R3575	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R3131	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R3576	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R3134	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R3577	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R3135	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3578	0100123	CF 270K OHM +-5% 1/8W
R3136	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3579	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R350	0150111	VR 1K OHM-B	R3580	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3504	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R3581	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R3505	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R3582	0100133	CF 680K OHM +-5% 1/8W
R3507	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W	R3584	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R351	0150110	VR 500 OHM-B	R3586	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3510	0100053	CF 330 OHM +-5% 1/8W	R3588	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3512	0700059	RESISTOR,CARBON FILM 27K OHM +-5% 1/16W	R3589	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R3513	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W	R3590	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3514	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R3591	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3517	0100055	CF 390 OHM +-5% 1/8W	R3593	0187078	CF 3.6K OHM +-5% 1/16W
R352	0150110	VR 500 OHM-B	R3594	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W
R3527	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R3595	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R3596	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W	R4006	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R3597	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W	R4007	0150157	VR 200K OHM-B RV-6
R3598	0100037	CF 68 OHM +-5% 1/8W	R4008	0100133	CF 680K OHM +-5% 1/8W
R3599	0100045	CF 150 OHM +-5% 1/8W	R4009	0150290	VR 50K OHM (B)
R3606	0100065	CF 1K OHM +-5% 1/8W	R4010	0150290	VR 50K OHM (B)
R3607	0100065	CF 1K OHM +-5% 1/8W	R4011	0100116	CF 130K OHM +-5% 1/8W
R3608	0100065	CF 1K OHM +-5% 1/8W	R4012	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R3609	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R4014	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3610	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4015	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R3611	0187064	CF 910 OHM +-5% 1/16W	R4016	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R3625	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4017	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3628	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4018	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3630	0100131	CF 560K OHM +-5% 1/8W	R4019	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R3631	0179536	MG 1M OHM +-5% 1/8W	R402	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3632	0100129	CF 470K OHM +-5% 1/8W	R4020	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R3633	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R4021	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R3634	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R4022	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R3635	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4023	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3637	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R4024	0100115	CF 120K OHM +-5% 1/8W
R3638	0187082	CF 5.1K OHM +-5% 1/16W	R4025	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3639	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R4028	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R3640	0187064	CF 910 OHM +-5% 1/16W	R4029	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3641	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4030	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3642	0187072	CF 2K OHM +-5% 1/16W	R4031	0100115	CF 120K OHM +-5% 1/8W
R3644	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R4032	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R3647	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4033	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3801	0187038	CF 75 OHM +-5% 1/16W	R4034	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R3802	0100041	CF 100 OHM +-5% 1/8W	R4035	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3803	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4036	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3804	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4037	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R3805	0100123	CF 270K OHM +-5% 1/8W	R4038	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R3806	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W	R4039	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R3807	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	R404	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3808	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4040	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R3809	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W	R4041	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3810	0100123	CF 270K OHM +-5% 1/8W	R4042	0100115	CF 120K OHM +-5% 1/8W
R3811	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4043	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R3812	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4044	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R3813	0100041	CF 100 OHM +-5% 1/8W	R4045	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R3814	0187038	CF 75 OHM +-5% 1/16W	R4046	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R3815	0187038	CF 75 OHM +-5% 1/16W	R4047	0100115	CF 120K OHM +-5% 1/8W
R3820	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R4048	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R3821	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W	R4051	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3822	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R4052	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R3823	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R4053	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R3824	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R407	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W
R4001	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R4070	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4002	0187082	CF 5.1K OHM +-5% 1/16W	R4071	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4003	0100125	CF 330K OHM +-5% 1/8W	R4089	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W
R4004	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R409	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W
R4005	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4090	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R4091	0100047	CF 180 OHM +-5% 1/8W	R426	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4092	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R428	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4095	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R437	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4096	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R438	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R4103	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R439	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4104	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R440	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4105	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R441	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4106	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R4626	0187072	CF 2K OHM +-5% 1/16W
R4107	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R4627	0187086	CF 7.5K OHM +-5% 1/16W
R4108	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W	R4628	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R4109	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R4629	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4110	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W	R4630	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R4111	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R4631	0187086	CF 7.5K OHM +-5% 1/16W
R4112	0100117	CF 150K OHM +-5% 1/8W	R4632	0187072	CF 2K OHM +-5% 1/16W
R4113	0100116	CF 130K OHM +-5% 1/8W	R4633	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4114	0150160	VR 10K OHM-B +-30%	R4634	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4115	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4635	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4116	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4636	0100059	CF 560 OHM +-5% 1/8W
R4117	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R4637	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R4118	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4638	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R4121	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4639	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R4123	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R4640	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R4124	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4641	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R413	11950511	FR 2.2 OHM +-5% 1/4W	R4642	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4142	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4643	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4143	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4644	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4144	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R4645	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4145	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R4646	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4146	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4647	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R4147	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4648	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R4148	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R4649	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4149	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R4650	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4150	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4651	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4151	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4652	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4152	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W	R4653	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4153	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W	R4655	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4156	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4656	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4157	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4657	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R416	11950511	FR 2.2 OHM +-5% 1/4W	R4658	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R4160	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4659	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R4161	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W	R4660	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R4162	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4661	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
R4163	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R4662	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
R4164	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4663	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4165	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R4664	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R417	0114161	CF 1K OHM +-5% 1/4W	R4665	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R419	0114161	CF 1K OHM +-5% 1/4W	R4666	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R420	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W	R4667	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R422	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W	R4668	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R423	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4669	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R425	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R4670	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R4671	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	R4729	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4672	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R4730	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4673	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R4731	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4674	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4732	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4675	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R4734	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4676	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4735	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4677	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R4737	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R4678	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4738	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R4679	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R4739	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4680	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R4742	0100121	CF 220K OHM +-5% 1/8W
R4681	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4743	0100121	CF 220K OHM +-5% 1/8W
R4682	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R4747	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4683	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R4748	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4684	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4749	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4685	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4750	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4686	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4752	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4687	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4753	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R4688	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4754	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4689	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4755	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4690	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4756	0114135	CF 150 OHM +-5% 1/4W
R4691	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R4757	0114135	CF 150 OHM +-5% 1/4W
R4692	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R4758	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4693	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R4759	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4694	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R4760	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4695	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R4761	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R4696	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W	R4762	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R4697	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R4763	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W
R4698	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5503	0700039	RESISTOR,CARBON FILM 820 OHM +-5% 1/16W
R4699	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	R5504	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R4700	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5505	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R4701	0179536	MG 1M OHM +-5% 1/8W	R5506	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4702	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R5508	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R4703	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5509	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4704	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5510	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R4705	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5512	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W
R4706	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5513	0700039	RESISTOR,CARBON FILM 820 OHM +-5% 1/16W
R4707	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W	R5514	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R4708	11950511	FR 2.2 OHM +-5% 1/4W	R5515	0700029	RESISTOR,CARBON FILM 150 OHM +-5% 1/16W
R4709	11950511	FR 2.2 OHM +-5% 1/4W	R5516	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R4710	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W	R5518	0700042	RESISTOR,CARBON FILM 1.2K OHM +-5% 1/16W
R4711	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W	R5522	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R4712	0114161	CF 1K OHM +-5% 1/4W	R5524	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
R4713	0114161	CF 1K OHM +-5% 1/4W	R5528	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R4716	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R5529	0100129	CF 470K OHM +-5% 1/8W
R4717	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R5530	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R4718	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R5531	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R4719	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R5533	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R4722	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W	R5534	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4723	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R5537	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R4727	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R5538	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R4728	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R5539	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R5540	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R5905	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5541	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R5906	0700039	RESISTOR,CARBON FILM 820 OHM +-5% 1/16W
R5542	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R5907	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W
R5543	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R5908	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R5544	0700065	RESISTOR,CARBON FILM 68K OHM +-5% 1/16W	R5909	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R5545	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R5910	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R5546	0700059	RESISTOR,CARBON FILM 27K OHM +-5% 1/16W	R5911	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R5547	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	R5912	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R5548	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R5913	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R5549	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R5914	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5550	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R5916	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5553	0100119	CF 180K OHM +-5% 1/8W	R5917	0187080	CF 4.3K OHM +-5% 1/16W
R5555	0700042	RESISTOR,CARBON FILM 1.2K OHM +-5% 1/16W	R5918	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
R5559	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R621	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5561	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R622	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R5562	0700033	RESISTOR,CARBON FILM 270 OHM +-5% 1/16W	R623	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R5564	0150113	VR 5K OHM-B RS-6	R624	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W
R5565	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R626	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R5566	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R627	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
R5567	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W	R628	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5568	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R629	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R5570	0700062	RESISTOR,CARBON FILM 39K OHM +-5% 1/16W	R630	0700065	RESISTOR,CARBON FILM 68K OHM +-5% 1/16W
R5571	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W	R631	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R5573	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R632	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W
R5574	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	R634	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R5575	0100125	CF 330K OHM +-5% 1/8W	R635	0150112	VR 2K OHM-B
R5581	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R636	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R5583	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R639	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R5584	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	+R640	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W
R5585	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	+R641	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R5591	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	+R642	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R5597	0100049	CF 220 OHM +-5% 1/8W	+R643	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5598	0100049	CF 220 OHM +-5% 1/8W	+R644	0700037	RESISTOR,CARBON FILM 560 OHM +-5% 1/16W
R5599	0100049	CF 220 OHM +-5% 1/8W	+R645	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W
R5602	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	+R646	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R5603	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R647	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W
R5604	0100051	CF 270 OHM +-5% 1/8W	R651	0113725	CF 100 OHM +-5% 1/2W
R5606	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R652	0113725	CF 100 OHM +-5% 1/2W
R5609	0100065	CF 1K OHM +-5% 1/8W	R653	0113725	CF 100 OHM +-5% 1/2W
R5610	0100065	CF 1K OHM +-5% 1/8W	R654	0100065	CF 1K OHM +-5% 1/8W
R5611	0100065	CF 1K OHM +-5% 1/8W	R656	0100053	CF 330 OHM +-5% 1/8W
R5612	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W	R660	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W
R5613	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R661	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R5618	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	▲R662	0150115	VR 20K OHM-B
R5619	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R663	0187110	CF 75K OHM +-5% 1/16W
R5620	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R664	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W
R5626	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	R665	0119722	MF 1 OHM +-5% 1W
R5901	0700034	RESISTOR,CARBON FILM 330 OHM +-5% 1/16W	R666	0119722	MF 1 OHM +-5% 1W
R5902	0700024	RESISTOR,CARBON FILM 56 OHM +-5% 1/16W	R667	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R5903	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	R668	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W
R5904	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R669	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
R670	0700065	RESISTOR CARBON FILM 68K OHM +-5% 1/16W	R729	0113729	CF 150 OHM +-5% 1/2W
R671	0113766	CF 4.7K OHM +-5% 1/2W	R730	0110101	MF 15 OHM +-5% 1W
R672	0110129	MF 220 OHM +-5% 1W	R732	0110129	MF 220 OHM +-5% 1W
R673	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R733	11951211	FR 1 OHM +-5% 1/4W
R674	0114135	CF 150 OHM +-5% 1/4W	R734	0119514	FR 10 OHM +-5% 1/4W
R675	0113758	CF 2.2K OHM +-5% 1/2W	R739	0110251	MF 1.8K OHM +-5% 2W
R680	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	 R742	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
R681	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R744	0100127	CF 390K OHM +-5% 1/8W
R682	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R745	0114149	CF 560 OHM +-5% 1/4W
R683	0700067	RESISTOR,CARBON FILM 100K OHM +-5% 1/16W	R751	01137191	CF 56 OHM +-5% 1/2W
R684	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R753	0110361	MF 4.7K OHM +-5% 3W
R685	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	R754	0113766	CF 4.7K OHM +-5% 1/2W
R691	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W	R755	0110363	MF 5.6K OHM +-5% 3W
+R7001	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W	R766	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
+R7002	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	R767	0100079	CF 3.9K OHM +-5% 1/8W
+R7003	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	R768	0110225	MF 150 OHM +-5% 2W
+R7004	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	R769	0114177	CF 4.7K OHM +-5% 1/4W
+R7005	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	+R770	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W
+R7006	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R771	0700063	RESISTOR CARBON FILM 47K OHM +-5% 1/16W
+R7007	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R772	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R7008	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R773	0100113	CF 100K OHM +-5% 1/8W
R7009	0700044	RESISTOR,CARBON FILM 1.8K OHM +-5% 1/16W	+R774	0187098	CF 24K OHM +-5% 1/16W
R7010	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	+R775	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W
R7011	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	+R776	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R7012	0700061	RESISTOR,CARBON FILM 33K OHM +-5% 1/16W	+R777	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W
R7013	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W	+R779	0100065	CF 1K OHM +-5% 1/8W
R7014	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	+R780	0100041	CF 100 OHM +-5% 1/8W
R7016	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R781	0110279	MF 27K OHM +-5% 2W
R7017	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R782	0110279	MF 27K OHM +-5% 2W
R7018	0700066	RESISTOR,CARBON FILM 82K OHM +-5% 1/16W	+R783	0110279	MF 27K OHM +-5% 2W
+R719	0113785	CF 27K OHM +-5% 1/2W	+R784	0110279	MF 27K OHM +-5% 2W
R7021	0700064	RESISTOR,CARBON FILM 56K OHM +-5% 1/16W	+R785	0110279	MF 27K OHM +-5% 2W
R7022	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R786	0114213	CF 33K OHM +-5% 1/4W
R7023	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W	+R790	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W
R7024	0700057	RESISTOR,CARBON FILM 18K OHM +-5% 1/16W	+R791	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R707	0700039	RESISTOR,CARBON FILM 820 OHM +-5% 1/16W	+R792	0700059	RESISTOR CARBON FILM 27K OHM +-5% 1/16W
 R708	0110355	MF 2.7K OHM +-5% 3W	+R793	0700059	RESISTOR CARBON FILM 27K OHM +-5% 1/16W
R709	0113770	CF 6.8K OHM +-5% 1/2W	+R794	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
 R710	0110351	MF 1.8K OHM +-5% 3W	+R795	0700033	RESISTOR,CARBON FILM 270 OHM +-5% 1/16W
R711	0119688	MF 0.22 OHM +-5% 1W	+R796	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R712	0100031	CF 39 OHM +-5% 1/8W	+R797	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
*R719	0113789	CF 39K OHM +-5% 1/2W	+R798	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R720	0113793	CF 56K OHM +-5% 1/2W	+R799	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R721	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W	R801B	0110371	MF 12K OHM +-5% 3W
R722	0100091	CF 12K OHM +-5% 1/8W	R801G	0110371	MF 12K OHM +-5% 3W
R723	0700044	RESISTOR,CARBON FILM 1.8K OHM +-5% 1/16W	R801R	0110371	MF 12K OHM +-5% 3W
R724	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W	R802B	0110369	MF 10K OHM +-5% 3W
R726	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W	R802G	0110369	MF 10K OHM +-5% 3W
R727	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W	R802R	0110369	MF 10K OHM +-5% 3W
*R728	0700053	RESISTOR,CARBON FILM 8.2K OHM +-5% 1/16W	 R804B	0151635	VR 1M OHM-B
+R728	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	 R804G	0151635	VR 1M OHM-B

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
 R804R	0151635	VR 1M OHM-B	R920	0700036	RESISTOR,CARBON FILM 470 OHM +-5% 1/16W
R805B	0179535	MG 680K OHM +-5% 1/2W	R921	0700055	RESISTOR,CARBON FILM 12K OHM +-5% 1/16W
R805G	0179535	MG 680K OHM +-5% 1/2W	R922	0700023	RESISTOR,CARBON FILM 47 OHM +-5% 1/16W
R805R	0179535	MG 680K OHM +-5% 1/2W	R923	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W
R806B	0179529	MG 10M OHM +-5% 1/2W	R931	0114169	CF 2.2K OHM +-5% 1/4W
R806G	0179529	MG 10M OHM +-5% 1/2W	R932	0700027	RESISTOR,CARBON FILM 100 OHM +-5% 1/16W
R806R	0179529	MG 10M OHM +-5% 1/2W	R933	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R807B	0100079	CF 3.9K OHM +-5% 1/8W	R934	01137191	CF 56 OHM +-5% 1/2W
R808B	0100073	CF 2.2K OHM +-5% 1/8W	R935	0700048	RESISTOR,CARBON FILM 3.9K OHM +-5% 1/16W
R809B	0100033	CF 47 OHM +-5% 1/8W	R936	0110237	MF 470 OHM +-5% 2W
R810B	0100049	CF 220 OHM +-5% 1/8W	R938	0113760	CF 2.7K OHM +-5% 1/2W
R810G	0100049	CF 220 OHM +-5% 1/8W	R939	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R810R	0100049	CF 220 OHM +-5% 1/8W	R940	0700052	RESISTOR,CARBON FILM 6.8K OHM +-5% 1/16W
R811B	0100065	CF 1K OHM +-5% 1/8W	R941	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R811G	0100065	CF 1K OHM +-5% 1/8W	R942	0700056	RESISTOR,CARBON FILM 15K OHM +-5% 1/16W
R811R	0100065	CF 1K OHM +-5% 1/8W	R943	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R812B	0100044	CF 130 OHM +-5% 1/8W	R948	0119693	MF 0.39 OHM +-5% 1W
R812G	0100033	CF 47 OHM +-5% 1/8W	R949	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R812R	0100033	CF 47 OHM +-5% 1/8W	R950	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
 R813G	15133411	VR 200 OHM-B	 R951	0113797	CF 82K OHM +-5% 1/2W
 R813R	15133411	VR 200 OHM-B	 R952	0700051	RESISTOR,CARBON FILM 5.6K OHM +-5% 1/16W
R815B	0100059	CF 560 OHM +-5% 1/8W	R953	0700063	RESISTOR,CARBON FILM 47K OHM +-5% 1/16W
R815G	0100059	CF 560 OHM +-5% 1/8W	R955	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R815R	0100059	CF 560 OHM +-5% 1/8W	R956	0700045	RESISTOR,CARBON FILM 2.2K OHM +-5% 1/16W
R817B	0100041	CF 100 OHM +-5% 1/8W	R957	0700042	RESISTOR,CARBON FILM 1.2K OHM +-5% 1/16W
R817G	0100049	CF 220 OHM +-5% 1/8W	R981	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R817R	0100053	CF 330 OHM +-5% 1/8W	R982	0700049	RESISTOR,CARBON FILM 4.7K OHM +-5% 1/16W
R818B	0100048	CF 200 OHM +-5% 1/8W	 R983	0700039	RESISTOR,CARBON FILM 820 OHM +-5% 1/16W
R819B	0179535	MG 680K OHM +-5% 1/2W	 R984	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W
R819G	0179535	MG 680K OHM +-5% 1/2W	R986	0119514	FR 10 OHM +-5% 1/4W
R819R	0179535	MG 680K OHM +-5% 1/2W	R987	0114137	CF 180 OHM +-5% 1/4W
R820B	0113744	CF 560 OHM +-5% 1/2W	R988	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W
R820G	0113744	CF 560 OHM +-5% 1/2W	R989	0700032	RESISTOR,CARBON FILM 220 OHM +-5% 1/16W
R820R	0113744	CF 560 OHM +-5% 1/2W	R990	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W
R901	0144151	WW 33 OHM +-5% 2W	R991	0700054	RESISTOR,CARBON FILM 10K OHM +-5% 1/16W
R902	0139015	CC 1M OHM +-20% 1/2W	R994	0114161	CF 1K OHM +-5% 1/4W
 R903	0147804	WW 0.75 OHM 15W	R996	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R905	0110169	MF 10K OHM +-5% 1W	R997	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W
R906	0700046	RESISTOR,CARBON FILM 2.7K OHM +-5% 1/16W			ICs
R907	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	IC0001	2001762	IC M37204M8-657SP
R908	0700044	RESISTOR,CARBON FILM 1.8K OHM +-5% 1/16W	IC0002	2007831	IC M6M80041P
R909	0700038	RESISTOR,CARBON FILM 680 OHM +-5% 1/16W	IC0003	2366301	IC UPD4052BC
R910	0148009	WW 0.056 OHM 2W	IC0004	2004952	IC LA7945N
R911	0700058	RESISTOR,CARBON FILM 22K OHM +-5% 1/16W	IC0005	2001753	IC LC7458B-03
R912	0700042	RESISTOR,CARBON FILM 1.2K OHM +-5% 1/16W	IC0006	2008721	IC M62358P
R913	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W	IC0961	2003423	IC UPC7893AHF (LINEAR)
R915	0700014	RESISTOR,CARBON FILM 10 OHM +-5% 1/16W	IC0962	2004665	IC PQ09RF21
R916	0700043	RESISTOR,CARBON FILM 1.5K OHM +-5% 1/16W	IC0963	2003421	IC UPC7805AHF
R917	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W	IC1101	2003411	IC UPC7905HF (LINEAR)
R918	0700047	RESISTOR,CARBON FILM 3.3K OHM +-5% 1/16W			
R919	0700041	RESISTOR,CARBON FILM 1K OHM +-5% 1/16W			

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
IC1102	2003421	IC UPC7805AHF	Q0012	2320643	TR 2SC1213C SI 80MHZ 400MW
IC1103	2003421	IC UPC7805AHF	Q0013	2320591	TR 2SC458B/C SI 230MHZ 200MW
*IC1201	2003201	IC STK4275 (LINEAR)	Q0014	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC1301	2003191	IC STK4274 (LINEAR)	Q0015	2320643	TR 2SC1213C SI 80MHZ 400MW
IC1326	2003191	IC STK4274 (LINEAR)	Q0016	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC1351	2003191	IC STK4274 (LINEAR)	Q0017	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC1501	2380391	IC UPD6326C	Q0018	2320643	TR 2SC1213C SI 80MHZ 400MW
IC3001	2004792	IC SN76862NJ-09	Q0019	2323521	TR 2SD789 B/C/D/E
IC3002	2004792	IC SN76862NJ-09	Q0020	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC3003	2917391	IC MSC11371RS	Q0021	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC3004	2003221	IC LVA521S-2 (LINEAR)	Q0022	2320637	TR 2SA673C/D SI 80MHZ 400MW
IC4001	2004592	IC AN5817K	Q0023	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4004	2004362	IC CXA1279AS	Q0501	2320598	TR 2SC458B/C/D SI 230MHZ 200MW
IC4005	2917391	IC MSC11371RS	Q0502	2312992	PHOTO TRANSISTOR PRT-38PT3F(M)
IC402	2004751	IC TA8200AH	Q0503	2320637	TR 2SA673C/D SI 80MHZ 400MW
IC4601	2004831	IC LA2780N	Q0504	2320598	TR 2SC458B/C/D SI 230MHZ 200MW
IC4602	2380391	IC UPD6326C	Q1101	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4603	2362651	IC HD14053BP	Q1102	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4605	2362605	IC BA4558	Q1103	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4606	2362651	IC HD14053BP	Q1104	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4607	2362605	IC BA4558	*Q1276	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4608	2362605	IC BA4558	*Q1277	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4609	2362651	IC HD14053BP	*Q1278	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4610	2004242	IC LV1000NA	*Q1279	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4611	2004851	IC LM33256N-15	*Q1280	2320637	TR 2SA673C/D SI 80MHZ 400MW
IC4612	2004362	IC CXA1279AS	Q3001	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4613	2004362	IC CXA1279AS	Q3002	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC4614	2004751	IC TA8200AH	Q3003	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC5501	2020321	IC YAT015	Q3004	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC601	2003541	IC LA7838 (LINEAR)	Q3005	2320637	TR 2SA673C/D SI 80MHZ 400MW
IC602	2380651	IC AN5551	Q3503	2320591	TR 2SC458B/C SI 230MHZ 200MW
△IC901	2373343	MODULE STR-M6511	Q3504	2320591	TR 2SC458B/C SI 230MHZ 200MW
△IC902	2000465	IC PS2501-1 (KD/LD) (PHOTO COUPLER)	Q3508	2320591	TR 2SC458B/C SI 230MHZ 200MW
△IC903	2000465	IC PS2501-1 (KD/LD) (PHOTO COUPLER)	Q3510	2320591	TR 2SC458B/C SI 230MHZ 200MW
△IC931	2381344	IC SE130N	Q3514	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC933	2003413	IC UPC7912HF	Q3516	2320591	TR 2SC458B/C SI 230MHZ 200MW
IC935	2000632	IC SI-3120CA	Q3517	2320637	TR 2SA673C/D SI 80MHZ 400MW
		TRANSISTORS	Q3518	2320591	TR 2SC458B/C SI 230MHZ 200MW
			Q3519	2320637	TR 2SA673C/D SI 80MHZ 400MW
			Q3520	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0001	2320637	TR 2SA673C/D SI 80MHZ 400MW	Q3521	2326021	TR 2SC1741S
Q0002	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q3523	2320637	TR 2SA673C/D SI 80MHZ 400MW
Q0003	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q3524	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0004	2320637	TR 2SA673C/D SI 80MHZ 400MW	Q3525	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0005	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q3801	2320598	TR 2SC458B/C/D SI 230MHZ 200MW
Q0006	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q3802	2320598	TR 2SC458B/C/D SI 230MHZ 200MW
Q0007	2320643	TR 2SC1213C SI 80MHZ 400MW	Q3804	2320598	TR 2SC458B/C/D SI 230MHZ 200MW
Q0008	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q4001	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0009	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q4002	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0010	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q4003	2320591	TR 2SC458B/C SI 230MHZ 200MW
Q0011	2320591	TR 2SC458B/C SI 230MHZ 200MW	Q4004	2320591	TR 2SC458B/C SI 230MHZ 200MW

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION		SYMBOL NO.	PART NO.	PART DESCRIPTION	
Q4005	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q707	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4007	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q708	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q4008	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q710	2312171	TR 2SC3852	
Q4009	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q711	2320663	TR 2SC1213AC	SI 80MHZ 400MW
Q401	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q712	2320663	TR 2SC1213AC	SI 80MHZ 400MW
Q4010	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q713	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4011	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q714	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4012	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q715	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4015	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q716	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q402	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q717	2320663	TR 2SC1213AC	SI 80MHZ 400MW
Q4027	2320591	TR 2SC458B/C	SI 230MHZ 200MW	+Q718	2320663	TR 2SC1213AC	SI 80MHZ 400MW
Q4028	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q720	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q403	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q721	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4030	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q722	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q4032	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q777	2315273	TRANSISTOR 2SC4589-04	
Q4033	2320637	TR 2SA673C/D	SI 80MHZ 400MW	+Q780	2314991	TRANSISTOR 2SC4630	
Q4034	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q801B	2312651	TR 2SC3503 C/D/E/F	
Q404	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q801G	2312651	TR 2SC3503 C/D/E/F	
Q4609	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q801R	2312651	TR 2SC3503 C/D/E/F	
Q4610	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q802B	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4611	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q802G	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4612	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q802R	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4613	2323521	TR 2SD789 B/C/D/E		Q803B	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q4615	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q803G	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q4618	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q803R	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q4619	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q804B	2320591	TR 2SC458B/C	SI 230MHZ 200MW
Q4620	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q902	2323782	TR 03P2M	
Q4621	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q903	2320665	TR 2SC1213A(D)	
Q4622	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q931	2323521	TR 2SD789 B/C/D/E	
Q4716	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q932	2312171	TR 2SC3852	
Q4717	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q933	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q5501	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q934	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q5502	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q935	2321112	TR 2SA778A	
Q5503	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q937	2326862	TR DTA114ES	
Q5505	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q938	2320637	TR 2SA673C/D	SI 80MHZ 400MW
Q5506	2320637	TR 2SA673C/D	SI 80MHZ 400MW	Q940	2323782	TR 03P2M	
Q5507	2320591	TR 2SC458B/C	SI 230MHZ 200MW	Q941	2312171	TR 2SC3852	
Q5901	2320591	TR 2SC458B/C	SI 230MHZ 200MW				DIODES
Q5902	2320591	TR 2SC458B/C	SI 230MHZ 200MW				
Q5903	2320637	TR 2SA673C/D	SI 80MHZ 400MW	D0001	23383211	DI 1SS270	
Q5904	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0002	23383211	DI 1SS270	
Q5906	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0003	23383211	DI 1SS270	
Q5907	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0004	23383211	DI 1SS270	
Q601	2312171	TR 2SC3852		D0005	23383211	DI 1SS270	
Q607	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0006	23383211	DI 1SS270	
+Q609	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0008	23383211	DI 1SS270	
+Q610	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0009	23383211	DI 1SS270	
Q611	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0010	23383211	DI 1SS270	
Q612	2320591	TR 2SC458B/C	SI 230MHZ 200MW	D0011	23383211	DI 1SS270	
Q613	2320637	TR 2SA673C/D	SI 80MHZ 400MW	D0012	23383211	DI 1SS270	
Q701	2326216	TR 2SC3116 S/T					

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
D0013	23383211	DI 1SS270	D413	23383211	DI 1SS270
D0014	23383211	DI 1SS270	D414	23383211	DI 1SS270
D0017	23383211	DI 1SS270	D416	23383211	DI 1SS270
D0018	23383211	DI 1SS270	D417	23383211	DI 1SS270
D0019	23383211	DI 1SS270	D418	23383211	DI 1SS270
D0020	23383211	DI 1SS270	D420	23383211	DI 1SS270
D0021	23383211	DI 1SS270	D421	23383211	DI 1SS270
D0022	23383211	DI 1SS270	D4604	23383211	DI 1SS270
D0023	23383211	DI 1SS270	D4605	23383211	DI 1SS270
D0024	23383211	DI 1SS270	D4606	23383211	DI 1SS270
D0025	23383211	DI 1SS270	D4607	23383211	DI 1SS270
D0026	23383211	DI 1SS270	D4608	23383211	DI 1SS270
D0030	23383211	DI 1SS270	D4609	23383211	DI 1SS270
D0031	23383211	DI 1SS270	D4611	23383211	DI 1SS270
D0036	23383211	DI 1SS270	D4612	23383211	DI 1SS270
D0037	23383211	DI 1SS270	D4613	23383211	DI 1SS270
D0038	23383211	DI 1SS270	D4614	23383211	DI 1SS270
D0039	23383211	DI 1SS270	D5503	23383211	DI 1SS270
D0040	23383211	DI 1SS270	D5504	23383211	DI 1SS270
D0501	23383211	DI 1SS270	D5507	23383211	DI 1SS270
D0502	23383211	DI 1SS270	D5508	23383211	DI 1SS270
D0503	2339691	LED SLH-56VC77F	D5509	23383211	DI 1SS270
D1101	23383211	DI 1SS270	D5510	23383211	DI 1SS270
D1102	23383211	DI 1SS270	D5902	23383211	DI 1SS270
D1103	2339551	DI EK14	D601	23383211	DI 1SS270
*D1276	23383211	DI 1SS270	D620	23383211	DI 1SS270
D1301	23394911	DI AM01Z	D621	23383211	DI 1SS270
D3001	23383211	DI 1SS270	D622	23383211	DI 1SS270
D3002	23383211	DI 1SS270	D651	2338902	DI DFM1SA4
D3003	23383211	DI 1SS270	D652	23394911	DI AM01Z
D3004	23383211	DI 1SS270	D653	23394911	DI AM01Z
D3005	23383211	DI 1SS270	D654	23394911	DI AM01Z
D3008	23383211	DI 1SS270	D657	23383211	DI 1SS270
D3502	23383211	DI 1SS270	D659	23383211	DI 1SS270
D3503	23383211	DI 1SS270	D660	23394911	DI AM01Z
D3504	23383211	DI 1SS270	+D661	23383211	DI 1SS270
D3506	23383211	DI 1SS270	 D701	2338902	DI DFM1SA4
D3507	23383211	DI 1SS270	 D702	2338902	DI DFM1SA4
D3508	23383211	DI 1SS270	D703	2330564	DI V11N SI
D3509	23383211	DI 1SS270	D704	2330564	DI V11N SI
D3511	23383211	DI 1SS270	D705	2338902	DI DFM1SA4
D3512	23383211	DI 1SS270	 D706	2348511	DIODE RS3FS
D3516	23383211	DI 1SS270	D707	2359371	DIODE S3L60 (HHEA MD)
D3517	23383211	DI 1SS270	D7070	2359371	DIODE S3L60 (HHEA MD)
D4001	23383211	DI 1SS270	D708	23383211	DI 1SS270
D4002	23383211	DI 1SS270	D709	23383211	DI 1SS270
D406	23383211	DI 1SS270	D710	2334581	DI ES1A SI
D407	23383211	DI 1SS270	D711	23383211	DI 1SS270
D408	23383211	DI 1SS270	D712	23394911	DI AM01Z
D409	23383211	DI 1SS270	D713	23383211	DI 1SS270
D410	23383211	DI 1SS270	+D714	23383211	DI 1SS270

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
+D715	23383211	DI 1SS270	ZD0009	2339839	ZD HZS5C3
+D716	23383211	DI 1SS270	ZD0010	2339885	ZD HZS12B2
D722	23383211	DI 1SS270	ZD0011	2339885	ZD HZS12B2
D722A	23383211	DI 1SS270	ZD0012	2339885	ZD HZS12B2
D723	23383211	DI 1SS270	ZD0013	2339885	ZD HZS12B2
D724	23383211	DI 1SS270	ZD0015	2339885	ZD HZS12B2
D728	23383211	DI 1SS270	ZD0016	2339885	ZD HZS12B2
D729	23383211	DI 1SS270	ZD0017	2339885	ZD HZS12B2
+D781	23383211	DI 1SS270	ZD0501	2339885	ZD HZS12B2
D782	2349661M	DIODE SM-1XN02	ZD0502	2339885	ZD HZS12B2
D801B	23383211	DI 1SS270	*ZD1201	2334324	ZD RD36EB3
D801G	23383211	DI 1SS270	*ZD1202	2334324	ZD RD36EB3
D801R	23383211	DI 1SS270	*ZD1226	2334324	ZD RD36EB3
 D901	2342061	DI D3SB(A)60	*ZD1227	2334324	ZD RD36EB3
 D903	23394811	DI AS01Z	*ZD1251	2334324	ZD RD36EB3
D904	23383211	DI 1SS270	*ZD1252	2334324	ZD RD36EB3
D905	23383211	DI 1SS270	ZD1301	2334324	ZD RD36EB3
 D906	23394811	DI AS01Z	ZD1302	2334324	ZD RD36EB3
 D931	2349661M	DIODE SM-1XN02	ZD1311	2334324	ZD RD36EB3
 D932	23383211	DI 1SS270	ZD1312	2334324	ZD RD36EB3
 D933	2349661M	DIODE SM-1XN02	ZD1326	2334324	ZD RD36EB3
D934	23383211	DI 1SS270	ZD1327	2334324	ZD RD36EB3
D935	23383211	DI 1SS270	ZD1336	2334324	ZD RD36EB3
 D936	2338944	DI FML-G12S(F)	ZD1337	2334324	ZD RD36EB3
 D937	2338944	DI FML-G12S(F)	ZD1351	2334324	ZD RD36EB3
 D938	2338944	DI FML-G12S(F)	ZD1352	2334324	ZD RD36EB3
 D939	2338932	DI FMG-G36S	ZD1361	2334324	ZD RD36EB3
 D940	2338944	DI FML-G12S(F)	ZD1362	2334324	ZD RD36EB3
 D941	2338944	DI FML-G12S(F)	ZD1501	2331797	ZD HZ5C1
 D942	2338944	DI FML-G12S(F)	ZD3001	2339836	DIODE-ZENER HZS5B3
D945	23394911	DI AM01Z	ZD3002	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D946	23394911	DI AM01Z	ZD3003	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
 D948	23383211	DI 1SS270	ZD3004	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
 D949	23383211	DI 1SS270	ZD3005	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D951	23383211	DI 1SS270	ZD3006	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D952	23383211	DI 1SS270	ZD3007	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D953	23383211	DI 1SS270	ZD3008	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D954	23383211	DI 1SS270	ZD3009	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D958	23383211	DI 1SS270	ZD3010	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D963	23383211	DI 1SS270	ZD3011	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D964	23383211	DI 1SS270	ZD3012	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D965	23383211	DI 1SS270	ZD3013	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
D966	23383211	DI 1SS270	ZD3014	2331154	ZD HZ12 (A1-3/B1-3/C1-3)
ZD0001	2334122	ZD RD5.1EB1	SI	ZD3015	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0002	2339844	ZD HZS6B1		ZD3017	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0003	2339839	ZD HZS5C3		ZD3019	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0004	2339885	ZD HZS12B2		ZD3021	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0005	2339885	ZD HZS12B2		ZD3022	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0006	2339885	ZD HZS12B2		ZD3024	2331154 ZD HZ12 (A1-3/B1-3/C1-3)
ZD0007	2339849	DIODE-ZENER HZS6C3		ZD303	2331799 ZD HZ5(C)3 SI
ZD0008	2335991	ZD HZT-33		ZD304	2331799 ZD HZ5(C)3 SI

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
ZD305	2331799	ZD HZ5(C)3	SI		TRANSFORMERS
ZD308	2339868M	ZD HZS9C2			
ZD309	2334285	DIODE-ZENER RD24EB4	 T701	2260291	HORIZONTAL DRIVE TRANSFORMER
ZD310	233423M	DIODE-ZENER RD36EB2	 *T702	2436491	FLYBACK TRANSFORMER C90LUIP-RC
ZD311	2339885	ZD HZS12B2	 +T702	2436493	FLYBACK TRANSFORMER
ZD312	2339885	ZD HZS12B2	 T703	2272762	SPC TRANSFORMER
ZD313	2339885	ZD HZS12B2	 T901	2213993	POWER TRANSFORMER
ZD314	2339885	ZD HZS12B2	 T902	2215594	SWITCHING TRANSFORMER
ZD315	2339885	ZD HZS12B2	T903	2215861	POWER TRANSFORMER
ZD3801	2331154	ZD HZ12 (A1-3/B1-3/C1-3)			FUSES
ZD3802	2331154	ZD HZ12 (A1-3/B1-3/C1-3)			
ZD3804	2331154	ZD HZ12 (A1-3/B1-3/C1-3)	 F601	2722353	FUSE 1.6A
ZD3805	2331154	ZD HZ12 (A1-3/B1-3/C1-3)	 F901	2722358	FUSE 5A
ZD4001	2339836	DIODE-ZENER HZS5B3	 F903	2722358	FUSE 5A
ZD4601	2331795	ZD HZ-5 (B2)	 F931	2722387M	FUSE 3A
ZD4602	2339812M	DIODE-ZENER HZS3A2	 F932	2722357	FUSE 4A
ZD4603	2339812M	DIODE-ZENER HZS3A2	 F933	2722387M	FUSE 3A
ZD5502	2339868M	ZD HZS9C2	 F934	2722387M	FUSE 3A
ZD5503	2339868M	ZD HZS9C2	 F935	2722357	FUSE 4A
ZD5504	2339868M	ZD HZS9C2	 F936	2722387M	FUSE 3A
ZD5510	2334324	ZD RD36EB3	 F937	2722353	FUSE 1.6A
ZD5514	2331849	ZD HZ-12(C3)			COMPOUND COMPONENTS
ZD5519	2339885	ZD HZS12B2			
ZD5520	2339885	ZD HZS12B2			
ZD651	2331807	ZD HZ-6 (C1)			
ZD652	2331154	ZD HZ12 (A1-3/B1-3/C1-3)	CP0001	2791754	DSS306-55B101M
ZD653	2334243	ZD RD16E(B2)	CP0002	2791754	DSS306-55B101M
ZD656	2334305	ZD RD30E (B4)	CP0003	2791754	DSS306-55B101M
ZD709	2339612M	ZD HZS3BLL	CP0004	2791754	DSS306-55B101M
 ZD710	2335461	ZD HZ24 (2L)	CP0005	2791754	DSS306-55B101M
ZD712	2334334	ZD RD39EB3	CP0006	2791754	DSS306-55B101M
ZD713	2339889	ZD HZS12C3	CP0007	2791754	DSS306-55B101M
ZD714	2339825	ZD HZS4B2	CP0501	2381126	REMOTE CONTROL RECEIVER SPS-409-1F
ZD715	2339889	ZD HZS12C3	CP2501	2375223	DIGITAL CONV. ASS'Y HC2013
ZD801B	2331827	ZD HZ-9 (C1)	 + CP702	0150668	FOCUS PACK MHF174-09
ZD801G	2331827	ZD HZ-9 (C1)	 CP901	2793312	CAPRISTOR
ZD801R	2331827	ZD HZ-9 (C1)	 CP901A	2784342	CONDENSER COVER
 ZD902	2339223	ZD HZS27-3L	CP902	2793312	CAPRISTOR
ZD904	2334304	ZD RD30EB3	MF0001	2163972	CERAMIC FILTER 6MHZ
ZD905	2334304	ZD RD30EB3	MF0002	2168831	CRYSTAL
ZD931	2339885	ZD HZS12B2	MF5501	2786685	CRYSTAL
 ZD932	2339231	ZD HZS30-1L	M301	2375401	CHIP BORAD HC3041 (3-LINE COMB)
 ZD933	2339042	ZD HZS7A2L	M302	2375511	CHIP BOARD HC3053S (P IN P UNIT)
ZD936	2335461	ZD HZ24 (2L)			COILS
ZD937	2331809	ZD HZ-6 (C3)			
ZD957	2339121M	ZD HZS11C1L	L0001	2122956	LA AXIAL COIL 100 MICRO H +-10%
ZD959	2339868M	ZD HZS9C2	L0002	2122956	LA AXIAL COIL 100 MICRO H +-10%
			L0003	2146091	COIL-OSC
			L0004	2122956	LA AXIAL COIL 100 MICRO H +-10%
			L0005	2122956	LA AXIAL COIL 100 MICRO H +-10%
			L0006	2122956	LA AXIAL COIL 100 MICRO H +-10%

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
L0011	2122956	LA AXIAL COIL 100 MICRO H +-10%	L945	2161152	FILTER COIL
L0012	2122956	LA AXIAL COIL 100 MICRO H +-10%	L946	2161152	FILTER COIL
L0013	2122956	LA AXIAL COIL 100 MICRO H +-10%	L947	2161152	FILTER COIL
L1101	2123469M	FERRITE BEADS CORE READ 2.3	L949	2161152	FILTER COIL
L1102	2123469M	FERRITE BEADS CORE READ 2.3	L950	2161152	FILTER COIL
*L1291	2272753	FOCUS CHOKE COIL	L951	2161152	FILTER COIL
*L1292	2272753	FOCUS CHOKE COIL	L953	2161152	FILTER COIL
L1501	2120482	FILTER COIL 100 MICRO H +-10%			
L2401	2122929	LAL AXIAL COIL			SWITCHES
L2402	2122929	LAL AXIAL COIL	S0501	2632851	TACTO SWITCH
L2403	2122929	LAL AXIAL COIL	S0502	2632901	KEY SWITCH
L2404	2122929	LAL AXIAL COIL	S5502	2621051	SLIDE SWITCH
L2405	2122929	LAL AXIAL COIL			
L2406	2122929	LAL AXIAL COIL			
L2409	2122929	LAL AXIAL COIL			
L2410	2122929	LAL AXIAL COIL			MISCELLANEOUS
L3002	2120489	FILTER COIL 100 MICRO H +-10%			
L3003	2120482	FILTER COIL 100 MICRO H +-10%	* 1	PH00441	CNTRL PNL ASS'Y (W/O INDOOR PLATE) (HHEA MD)
L3004	2120489	FILTER COIL 100 MICRO H +-10%	+ 1	PH00444	CNTRL PNL ASS'Y (W/O INDOOR PLATE) (HHEA MD)
L3006	2220584	CHOKE COIL TSL0707330K		3827871	INDOOR PLATE (HHEA MD) (HSCC MD)
L3501	2120482	FILTER COIL 100 MICRO H +-10%		3821732	CONTROL DOOR (W/O DOOR PLATE) (HHEA MD)
L3503	2122956	LA AXIAL COIL 100 MICRO H +-10%		3827872	DOOR PLATE (HHEA MD) (HSCC MD)
L4001	2122253	LA AXIAL COIL 100 MICRO H		3700921	LAMP LENS (HHEA MD) (HSCC MD)
L401	2123461	FERRITE BEADS CORE		3875771	LATCH
L402	2123461	FERRITE BEADS CORE		4524915	HEXAGON HEAD B-TAP.SCREW 4X20
L404	2123461	FERRITE BEADS CORE		3273431	CONTROL BUTTON (HHEA MD) (HSCC MD)
L405	2122253	LA AXIAL COIL 100 MICRO H		4159427	3X10 TAPPING SCREW WITH WASHER
L4601	2123461	FERRITE BEADS CORE		4518772	3X12 TNE
L4602	2123461	FERRITE BEADS CORE		3204182	R/C LENS (HHEA MD) (HSCC MD)
L5503	2122949	LA AXIAL COIL 33 MICRO H +-10%		3725352	BOARD HOLDER
L5504	2120482	FILTER COIL 100 MICRO H +-10%	* 2	3189766	SCREEN ASS'Y (HHEA MD) /60 "
L5505	2120482	FILTER COIL 100 MICRO H +-10%	*3	3850615	SCREEN FRAME
L5901	2120482	FILTER COIL 100 MICRO H +-10%	4	4492091	LENS CRT METAL
L701	2121181	FILTER COIL	5	3873612	PWB HOLDER
L703	2275381	CHOKING COIL	+ 6	3811971	BACK COVER DOOR
L705	2120486	FILTER COIL 4700 MICRO H +-5%	7	4519512	TAPPING SCREW 4X16 MM
L706	2124511	LINEARITY COIL	8	3204811	TERMINAL HOLDER ASS'Y
L707	2122095	FILTER COIL 27 MICRO H	9	4524911	HEXAGON FLANGEHEAD 4X12
L708	2120482	FILTER COIL 100 MICRO H +-10%	10	3744173	CLAMPER
L709	2122094	FIXED COIL	11	4519503	3X12 TAPPING SCREW
⚠️L901	2123507	LINE FILTER		4159427	3X10 TAPPING SCREW WITH WASHER
⚠️L902	2123507	LINE FILTER		4519512	TAPPING SCREW 4X16 MM
⚠️L905	2124365	COIL	12	4329271	WASHER (F)
L906	2122653	FERRITE BEADS CORE	13	4522901	NUT
L912	2123469M	FERRITE BEADS CORE READ 2.3	14	4520232	4X16 DT SCREW
L939	2161152	FILTER COIL	15	4520771	4X18 TAPPING SCREW WITH WASHER
L940	2161152	FILTER COIL	*16	4520772	4X14 HEX HEAD SCREW
L941	2161152	FILTER COIL	*17	4108274	MIRROR HOLDER
L942	2161152	FILTER COIL	*18	4137977	4X25 SELF TAPPING SCREW
L943	2161152	FILTER COIL	*19	3394293	FRONT SURFACE MIRROR
L944	2161152	FILTER COIL	20	4137975	4X16 ZA R SCREW

PRODUCT SAFETY NOTE: Components marked with a have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
21	3142601	CABINET ASS'Y (HHEA MD)(60SX4K)	ND901	4520883	M3X12 SCREW WITH WASHER
21	3142602	CABINET ASS'Y (HHEA MD)(60SX3B)	ND936	2771892	FERRITE BEADS CORE 004
+ 21	3142741	CABINET ASS'Y (HHEA MD)(50SX5P)	ND939	4520883	M3X12 SCREW WITH WASHER
	3742021	LEAD HOLDER(CABINET)	NF601	2721351	FUSE HOLDER
+	4336491	CASTER METAL	NF901	2721351	FUSE HOLDER
+ 22	3462207	BACK COVER (HHEA MD) (HSCC MD)	NF903	2721351	FUSE HOLDER
+ 23	3191461	50 FRONT SURF MIRROR	NF932	2721351	FUSE HOLDER
*24	3169713	UPPER REAR BOARD	NF935	2721351	FUSE HOLDER
*25	3169714	MIDDLE REAR BOARD	NF937	2721351	FUSE HOLDER
*26	H520311	LOWER REAR BOARD	NIC901	4520883	M3X12 SCREW WITH WASHER
+	4526351	SPACER	NIC933	4520883	M3X12 SCREW WITH WASHER
+ 29	4618172	RUBBER SPACER	NIC935	4520883	M3X12 SCREW WITH WASHER
+ 30	4524912	HEXAGON FLANGEHEAD 4X16	NI111B	4520883	M3X12 SCREW WITH WASHER
+ 34	3169941	BACK BOARD (HHEA MD)	NI112B	4520883	M3X12 SCREW WITH WASHER
35	4304282	COVER NET	* NI121B	4520885	M3X16 SCREW
36	4517997	4X12 SELF TAPPING SCREW	* NI121D	4518772	3X12 TNE
	3727972	HOLDER-AC LINE CORD	NI131B	4520885	M3X16 SCREW
	3744172	CLUMT 20	NI131C	4518772	3X12 TNE
	4520515	4X30 SPECIAL SCREW	NI601B	4520883	M3X12 SCREW WITH WASHER
+ 38	3189761	SCREEN ASS'Y (HHEA MD) (HSCC MD) /50 <sup>0</sup> /	NQ710B	4520883	M3X12 SCREW WITH WASHER
+ 39	3850611	SCREEN FRAME	NQ777B	4520883	M3X12 SCREW WITH WASHER
*40	4869331	LENS CRT BLOCK ASS'Y R (HHEA MD)	NQ777C	2771892	FERRITE BEADS CORE 004
*41	4869332	LENS CRT BLOCK ASS'Y G (HHEA MD)	NQ777D	2771893	FERRITE BEADS CORE
*42	4869333	LENS CRT BLOCK ASS'Y B (HHEA MD)	+NQ780B	4520883	M3X12 SCREW WITH WASHER
+40	4869321	LENS CRT BLOCK ASS'Y R (HHEA MD) (HSCC MD)	NQ932	4520883	M3X12 SCREW WITH WASHER
+41	4869324	LENS CRT BLOCK ASS'Y G (HHEA MD)	NQ941	4520883	M3X12 SCREW WITH WASHER
+42	4869323	LENS CRT BLOCK ASS'Y B (HHEA MD) (HSCC MD)	NT902	4518772	3X12 TNE
*EANT	2427366	ANTENNA SWITCH ASB-321A (HHEA MD) (HSCC MD)	N003	3700342	WIRE CLAMP
+EANT	2427365	ANT. SWITCH ASS'Y ASB-311E- (HHEA MD) (HSCC MD)	N0932A	4520883	M3X12 SCREW WITH WASHER
+E101	2444875	DEFLECTION YOKE (HHEA MD) (HSCC MD)	N0962A	4520883	M3X12 SCREW WITH WASHER
*E101G	2444876	DEFLECTION YOKE (HHEA MD)	N0963A	4520883	M3X12 SCREW WITH WASHER
*E101R	2444875	DEFLECTION YOKE (HHEA MD) (HSCC MD)	N1030	4159427	3X10 TAPPING SCREW WITH WASHER
*E101B	2444875	DEFLECTION YOKE (HHEA MD) (HSCC MD)	N1031D	4518772	3X12 TNE
* E103	3810831	MAGNET SPACER	* N1032D	8815114	LOCK WASHER 3MMD
E104	2774962	BEAM ALINEMENT MAGNET	+N1032D	8815124	WASHER,LOCK 3MM
* E105	2774973	FOCUS MAGNET	N1033	4518772	3X12 TNE
E301	2573971	REMOTE CONTROL CLU-850GR (HHEA MD) (HSCC)	N1055	4159425	3X16 TAPPING SCREW
E301	2573416	R/C CLU-950GR (FOR DIGITAL CONV. ADJ. ONLY)	N1060	3746482	WIRE CLAMP
E302	2573622	REMOTE CONTROL CLU-609 (HHEA MD) (HSCC)	+N1075	4159427	3X10 TAPPING SCREW WITH WASHER
E801B	2698671	CPT SOCKET	N151B	4526322	M8X10 SCREW
*E801G	2698672	CPT SOCKET	N151G	4526322	M8X10 SCREW
*E801R	2698672	CPT SOCKET	N151R	4526322	M8X10 SCREW
+E801G	2698671	CPT SOCKET	N155	4524911	HEXAGON FLANGEHEAD 4X12
+E801R	2698671	CPT SOCKET	N157B	4524913	HEXAGON FLANGEHEAD 4X12 R
E802	2661756	1P PLUG PIN WITH BASE	N157G	4524913	HEXAGON FLANGEHEAD 4X12 R
FE0001	2429691	FRONTEND V8-A68FT (HHEA MD) (HSCC MD)	N157R	4524913	HEXAGON FLANGEHEAD 4X12 R
J01	2983111	3PJACK WITH S TERMINAL	+N200B	3708418	SP LENS S-ASS'Y (B)
J3001	2672891	6P PIN JACK WITH S TERMINAL	+N200G	3393507	LENS S-ASS'Y HCE(R)(G)
J3002	2672894	5P PIN JACK	+N200R	3708417	SP LENS S-ASS'Y (R)(G)
J4502	2672901	4P PUSH TERMINAL	*N202B	3812401	LENS DELTA 12R AB (HHEA MD) (HSCC MD)
+ND707	2771894	FERRITE BEADS CORE 006	*N202G	3393505	LENS S-ASS'Y HCD RG2

PRODUCT SAFETY NOTE: Components marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	PART DESCRIPTION	SYMBOL NO.	PART NO.	PART DESCRIPTION
 *N202R	3812401	LENS DELTA 12R AB (HHEA MD) (HSCC MD)	 SG801G	2340039	SPARK GAP
N244G1	4526102	4X18 SCREW	 SG801R	2340039	SPARK GAP
N302	4520883	M3X12 SCREW WITH WASHER	 SG802B	2340039	SPARK GAP
N402A	4520881	M3X8 SCREW WITH WASHER	 SG802	2340039	SPARK GAP
N408B	3332021	EARTH SPRING	 SG802R	2340039	SPARK GAP
N408G	3332021	EARTH SPRING	 SP401	2412921	SPEAKER 160MM
N408R	3332021	EARTH SPRING	 SP402	2412921	SPEAKER 160MM
N409B	4159411	3X8 KNURL TAPPING SCREW	 SP403	2414941	SPEAKER (HHEA MD) (HSCC MD)
N409G	4159411	3X8 KNURL TAPPING SCREW	 SP404	2414941	SPEAKER (HHEA MD) (HSCC MD)
N409R	4159411	3X8 KNURL TAPPING SCREW	W811R	2692461	FOCUS LEAD WIRE (HHEA MD) (HSCC MD)
N4614A	4520883	M3X12 SCREW WITH WASHER	+W811B	2692461	FOCUS LEAD WIRE (HHEA MD) (HSCC MD)
N801	3763751	SK BINDER	+W811G	2692461	FOCUS LEAD WIRE (HHEA MD) (HSCC MD)
N803	4520881	M3X8 SCREW WITH WASHER	X4601	2786585	CRYSTAL
 N9	2745414	POWER SUPPLY CORD	X5501	2791505	CRYSTAL
N9BFN	4520883	M3X12 SCREW WITH WASHER			
N9N	4520881	M3X8 SCREW WITH WASHER			
N9NN	4770601	3 FLANGE NUT			
N9NR	4520883	M3X12 SCREW WITH WASHER			
N901	3772201	AC CORD HOLDER			
N907	3739671	CORD HOLDER			
PAN	2663821	2P PLUG PIN			
PCB	2661753	PIN PLUG WITH BASE			
PCG	2661753	PIN PLUG WITH BASE			
PCR	2661753	PIN PLUG WITH BASE			
PD	2663135	PLUG PIN WITH BASE (6P)			
PDR	2902263	4P SUB MINI PLUG PIN			
PDT	2663821	2P PLUG PIN			
PFJ	2902266	7P SUB MINI PLUG PIN			
* PFO	2661753	PIN PLUG WITH BASE			
* PHP	2661752	PLUG PIN			
* PHP	2661752	PLUG PIN			
PKZ	2674631	5P CONNECTOR			
PLG	2661756	1P PLUG PIN WITH BASE			
PMB	2665272	4P PLUG PIN WITH BASE			
PMG	2665272	4P PLUG PIN WITH BASE			
PMR	2665272	4P PLUG PIN WITH BASE			
PP31	2661751	PLUG PIN WITH BASE			
PS	2661752	PLUG PIN			
PS	2661942	CONNECTOR			
PSD1	2674631	5P CONNECTOR			
PSD2	2674635	10P CONNECTOR			
PSD3	2674634	8P CONNECTOR			
PSD4	2674635	10P CONNECTOR			
PSD5	2674631	5P CONNECTOR			
PSG	2661756	1P PLUG PIN WITH BASE			
PSL	2661944	CONNECTOR			
PTS	2663821	2P PLUG PIN			
 RL901	2640572	POWER RELAY			
+SG780	2340039	SPARK GAP			
SG781	2340039	SPARK GAP			
 SG801B	2340039	SPARK GAP			

## **NOTES**

**HITACHI**