



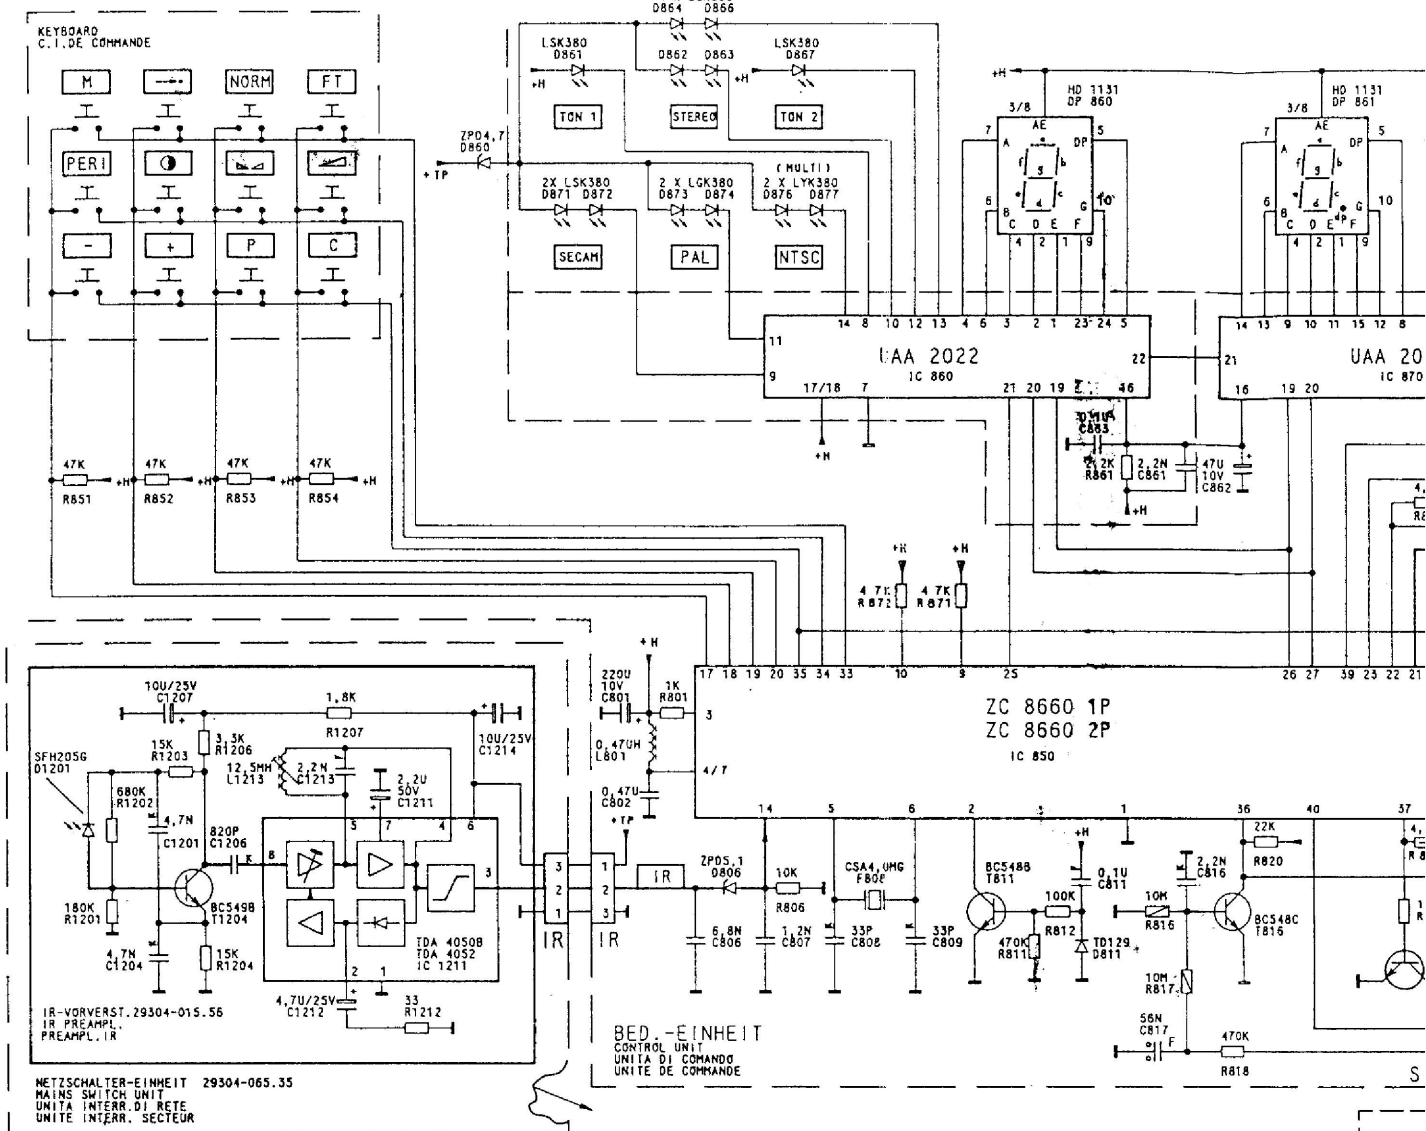
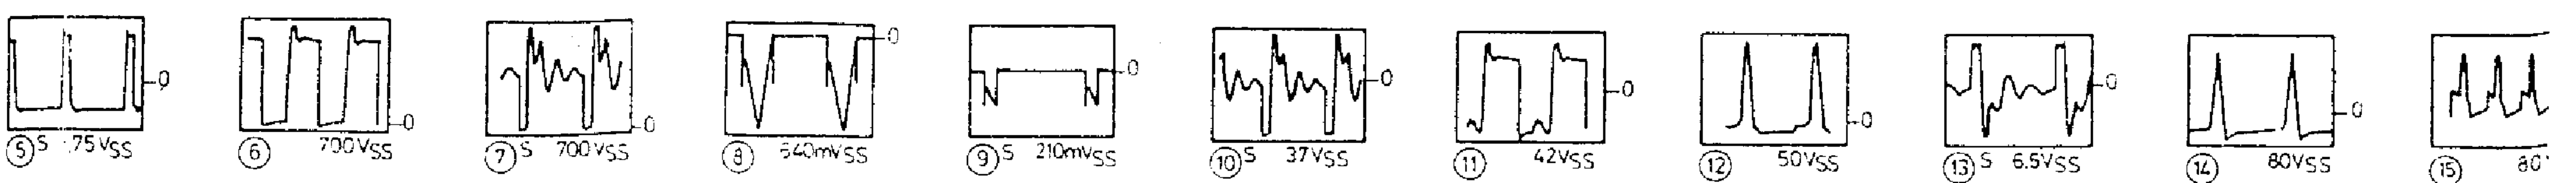

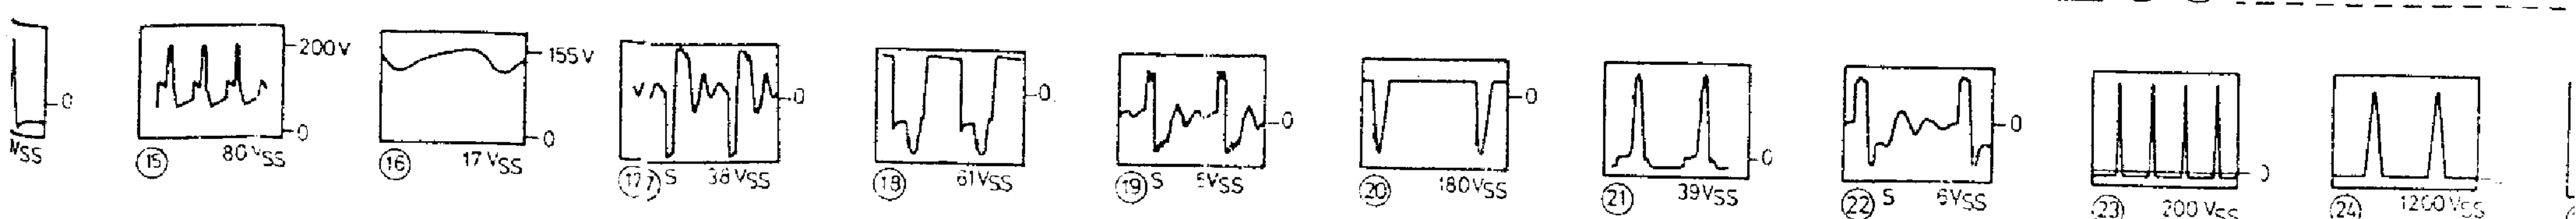




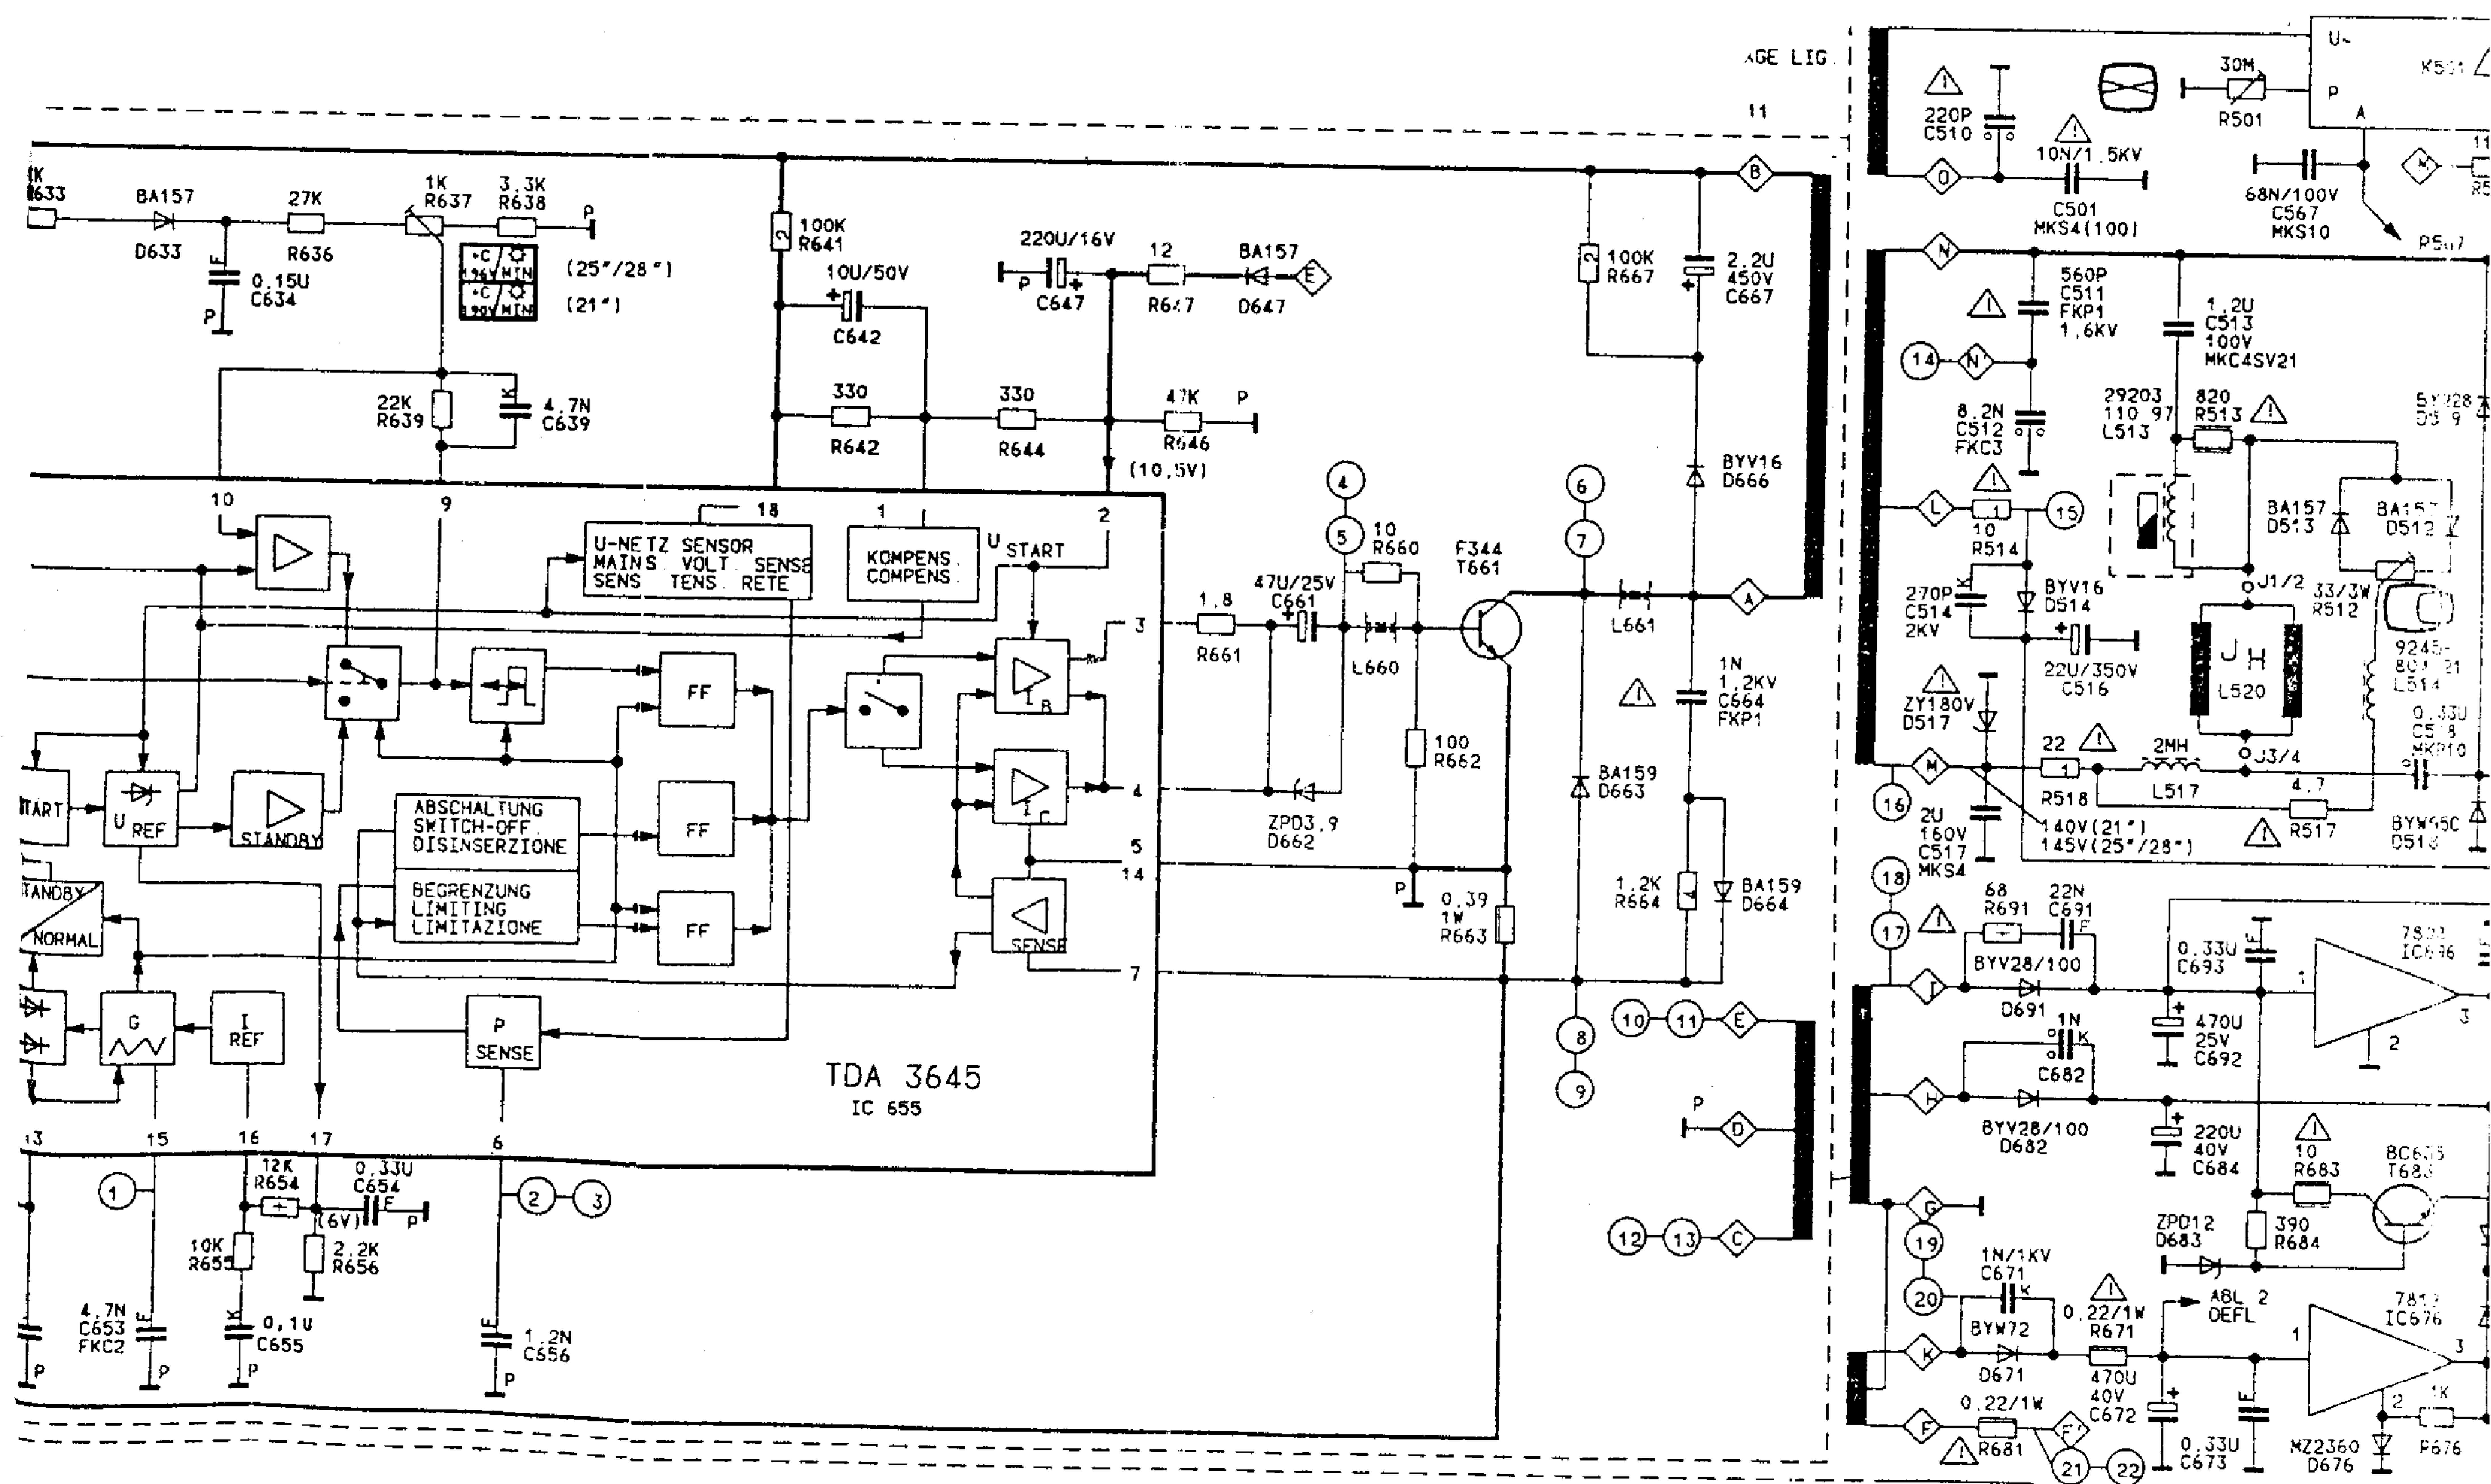


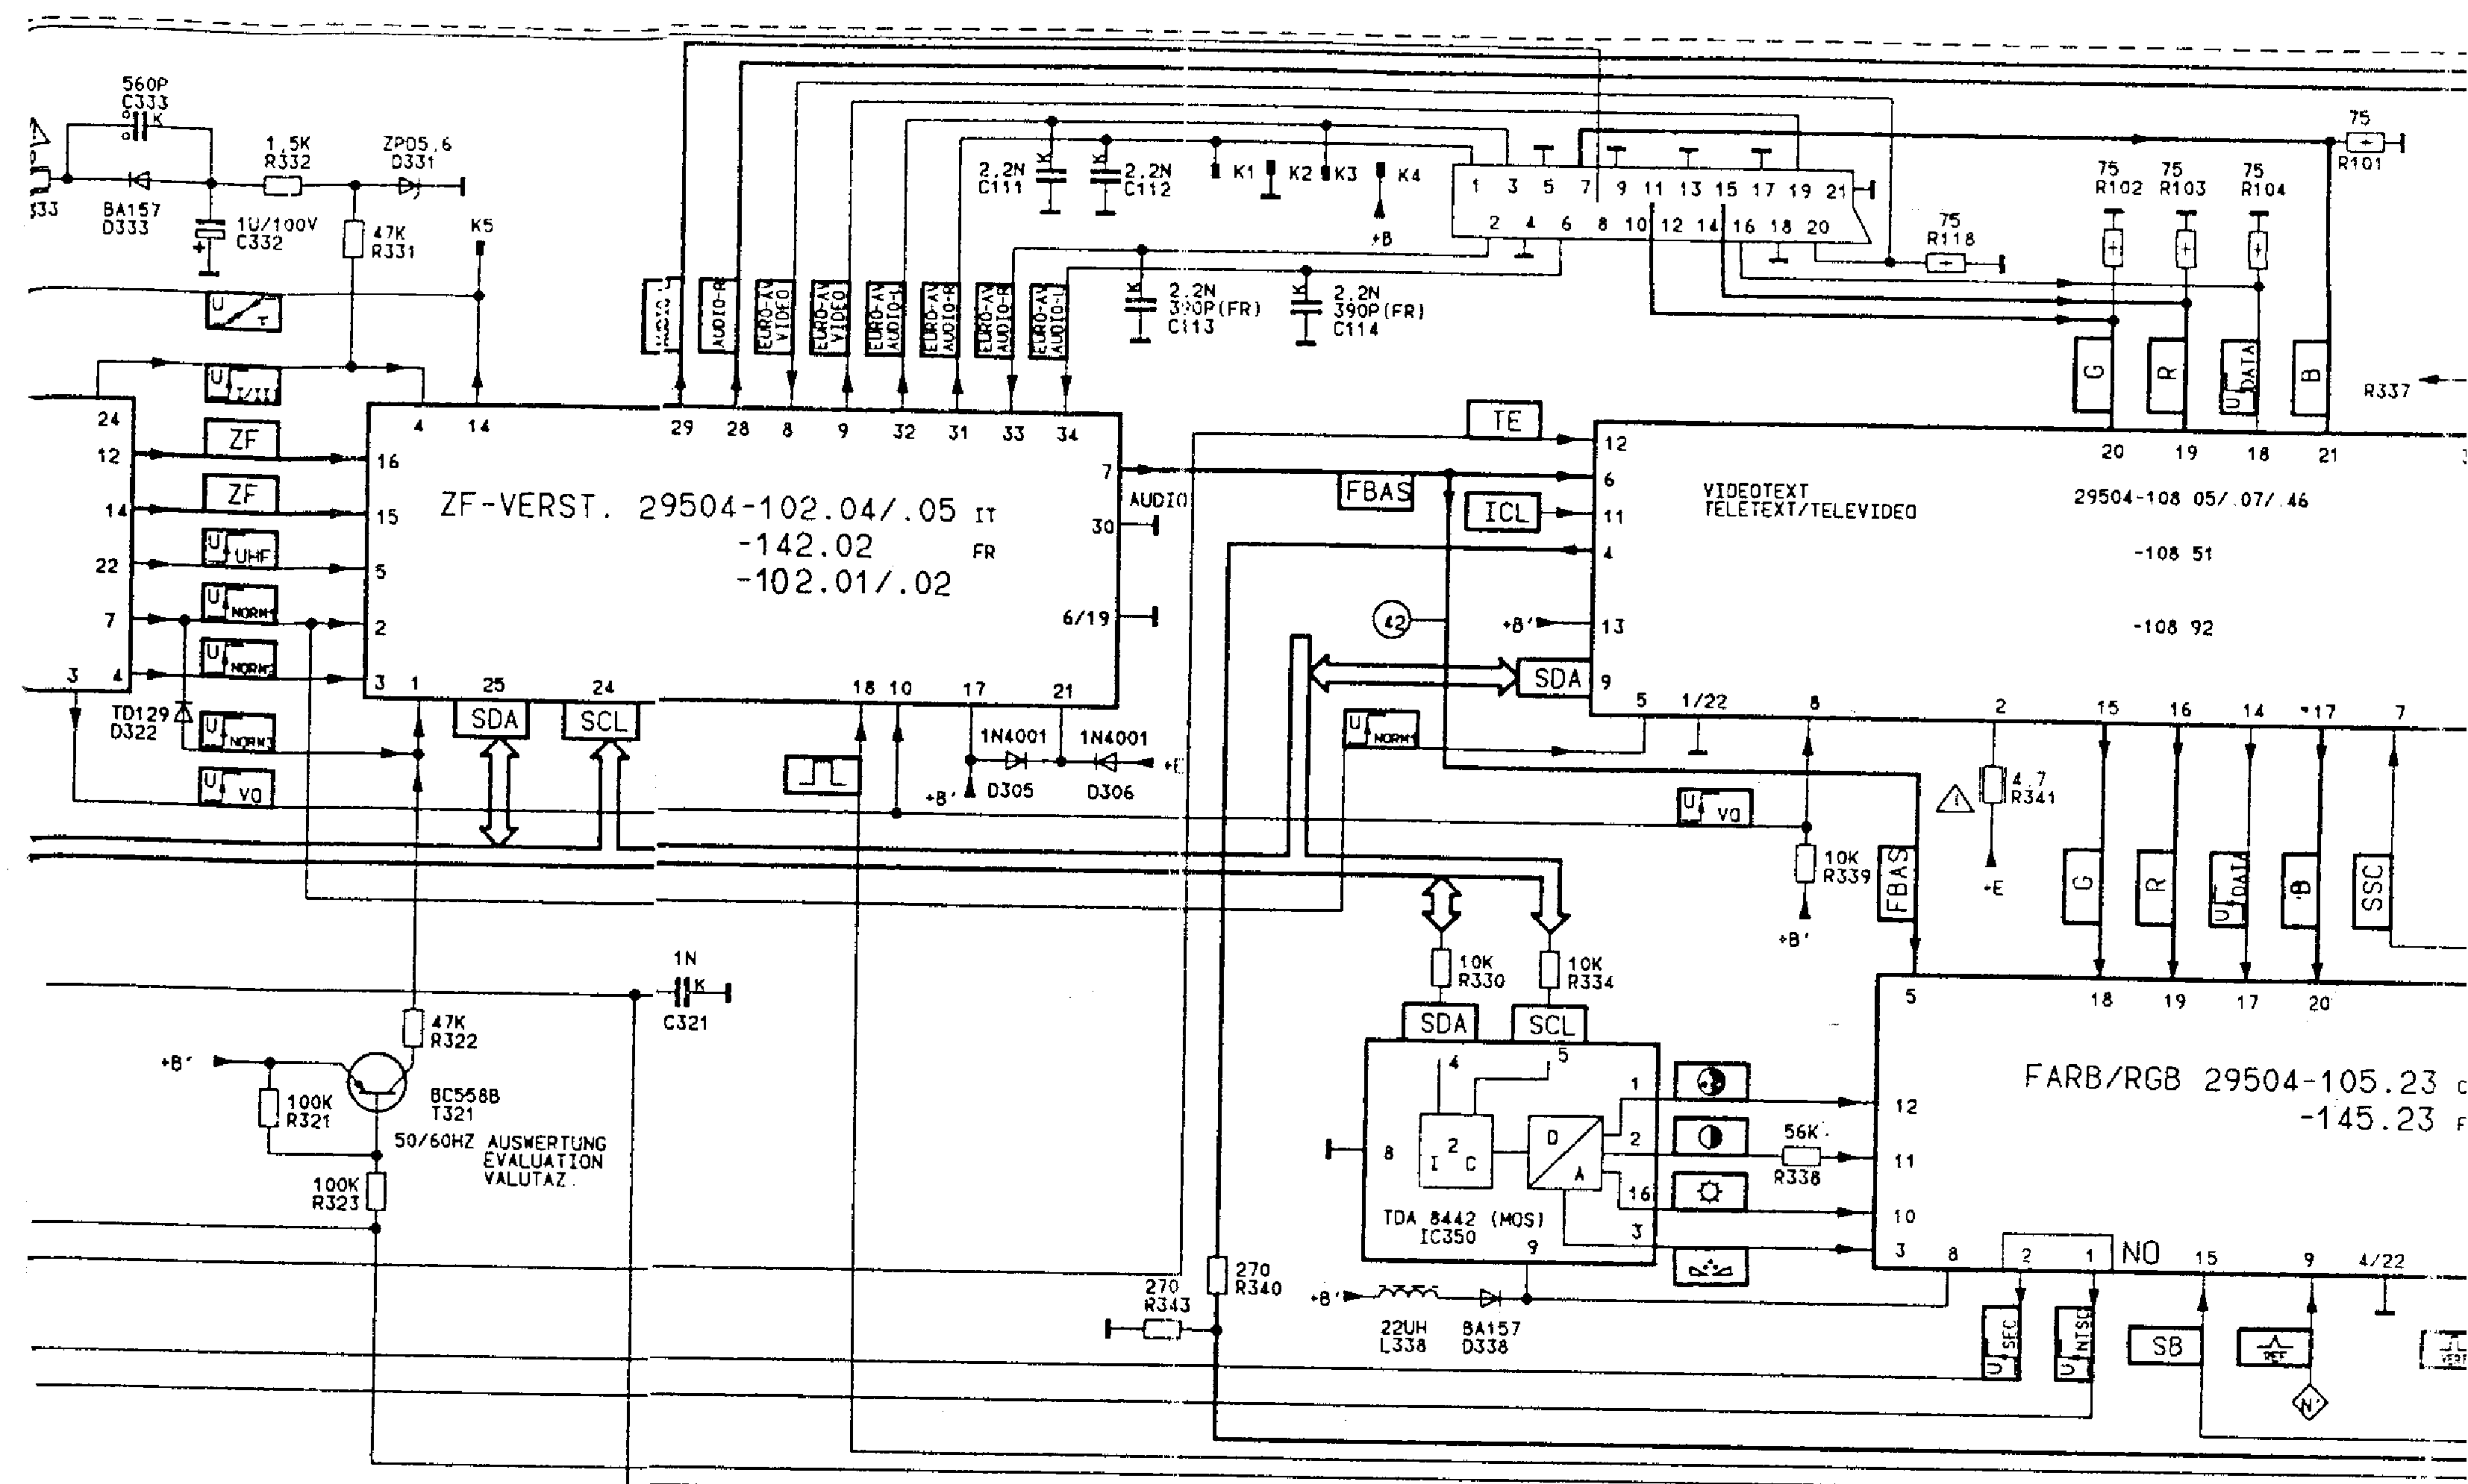

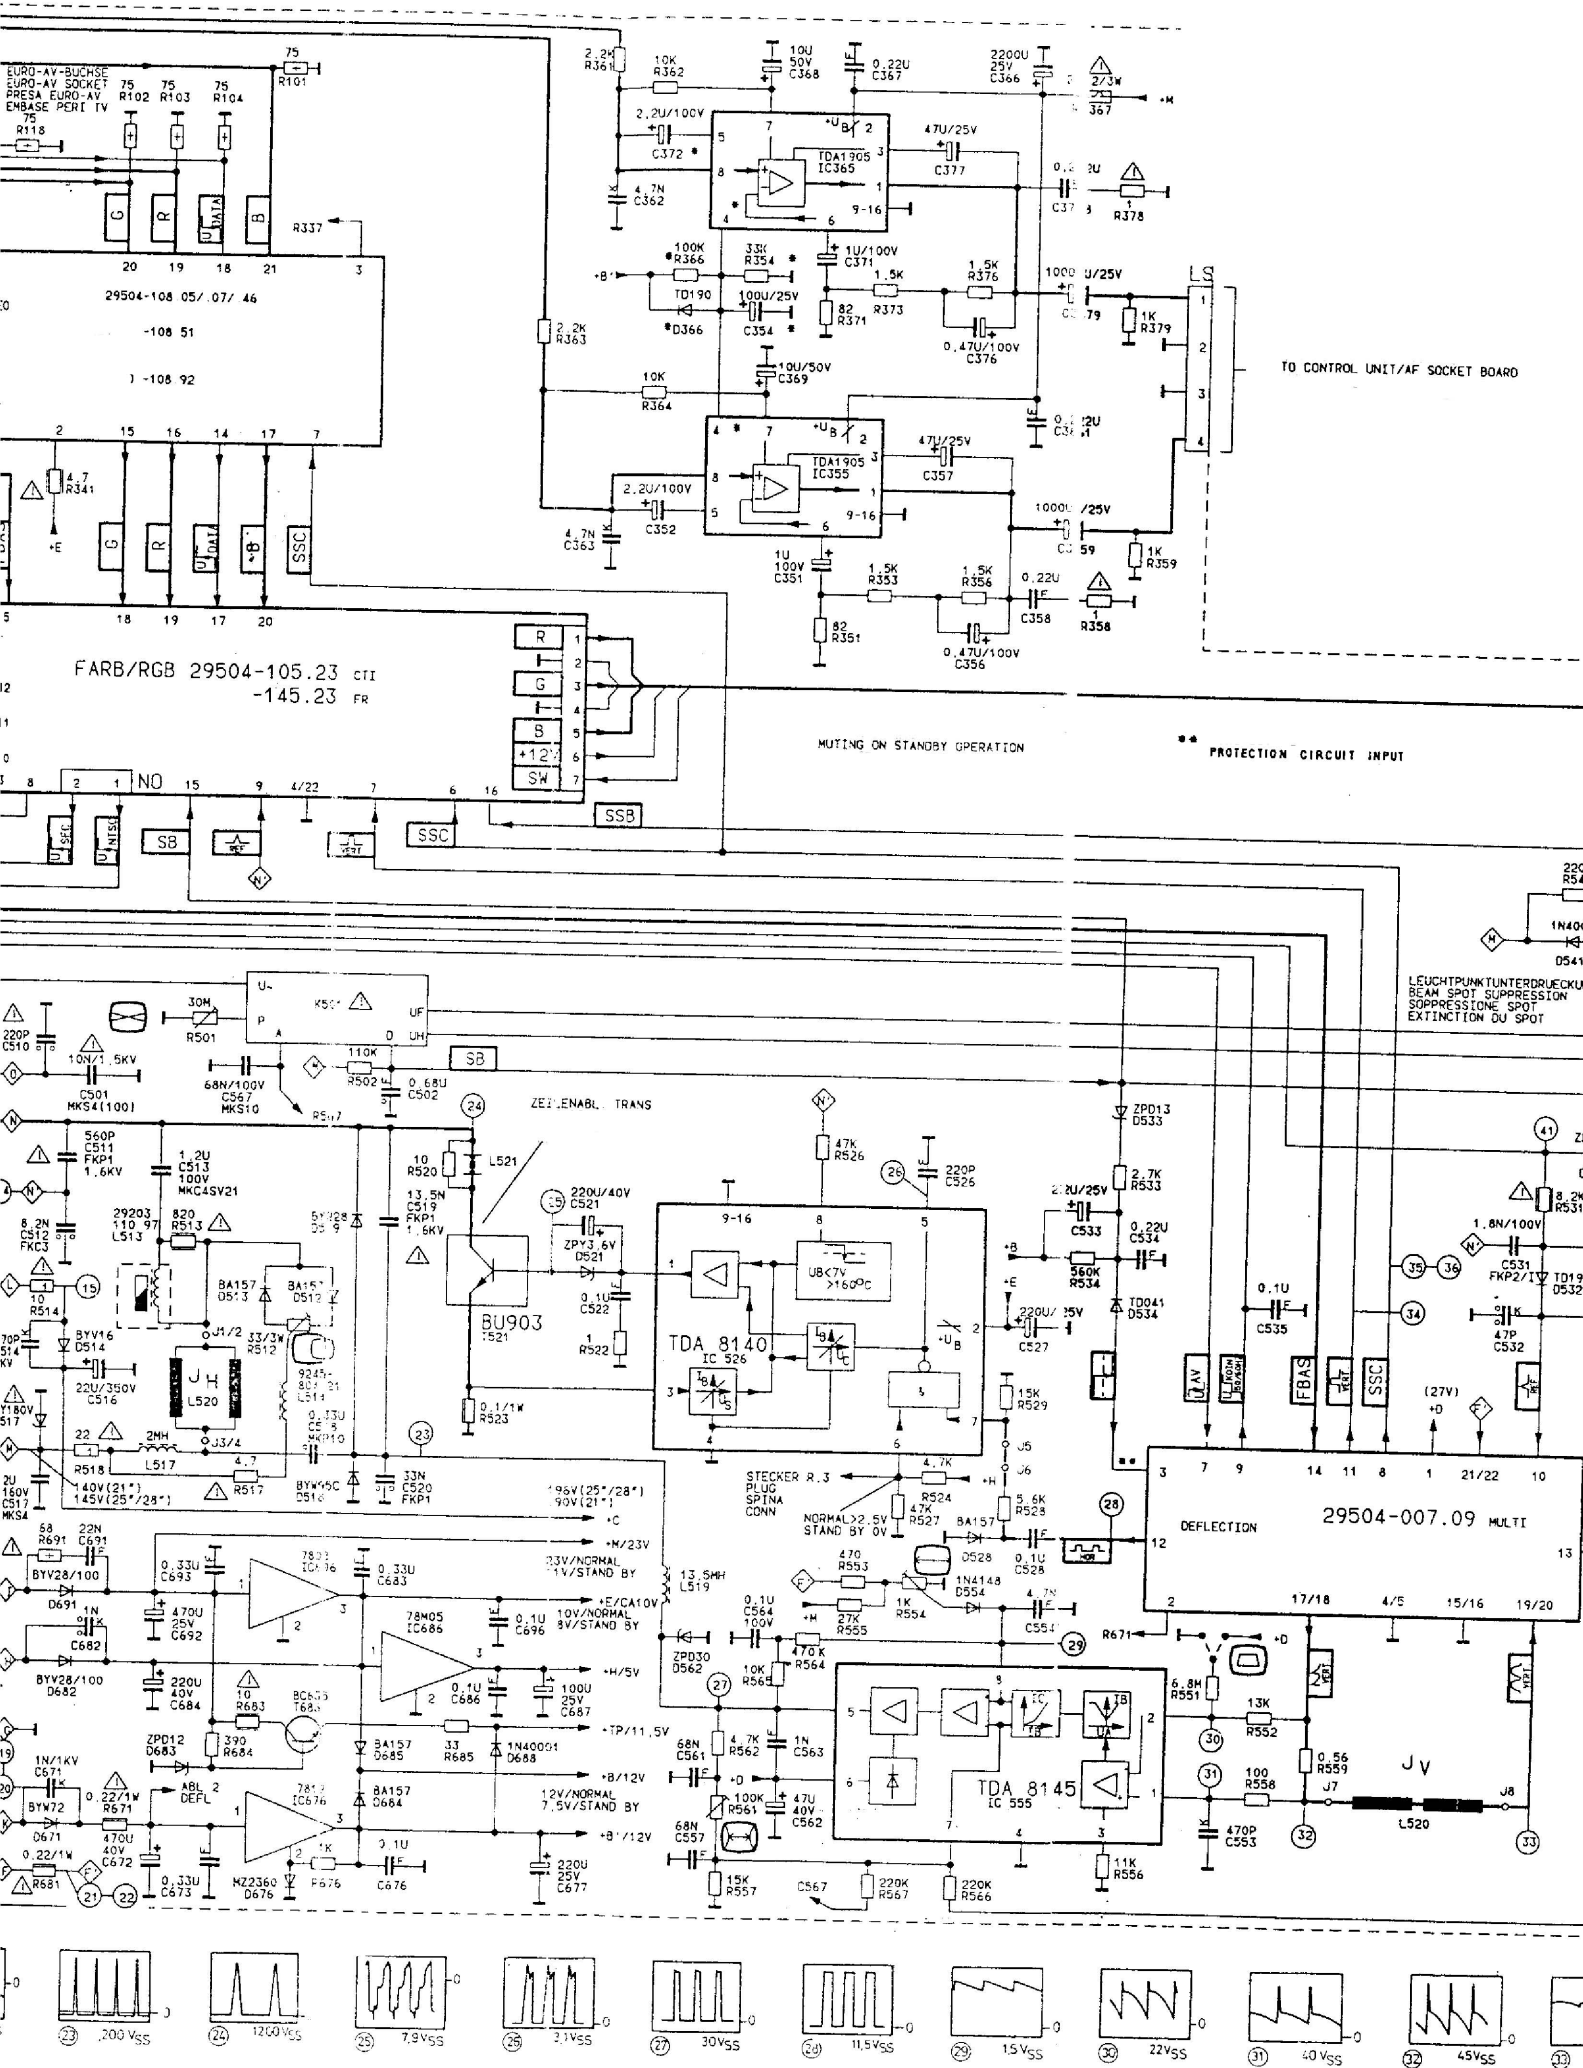


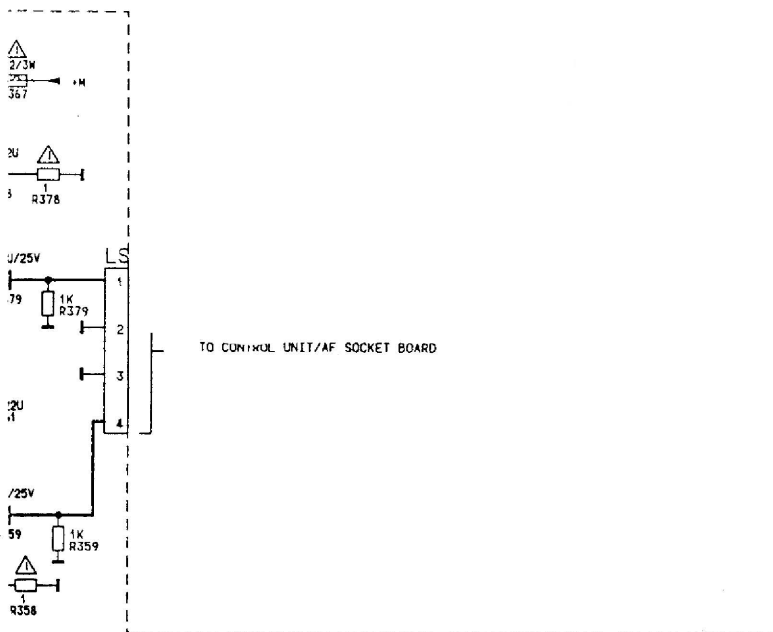


EB ** PROTECTION CIRCUIT INPUT
ILLE

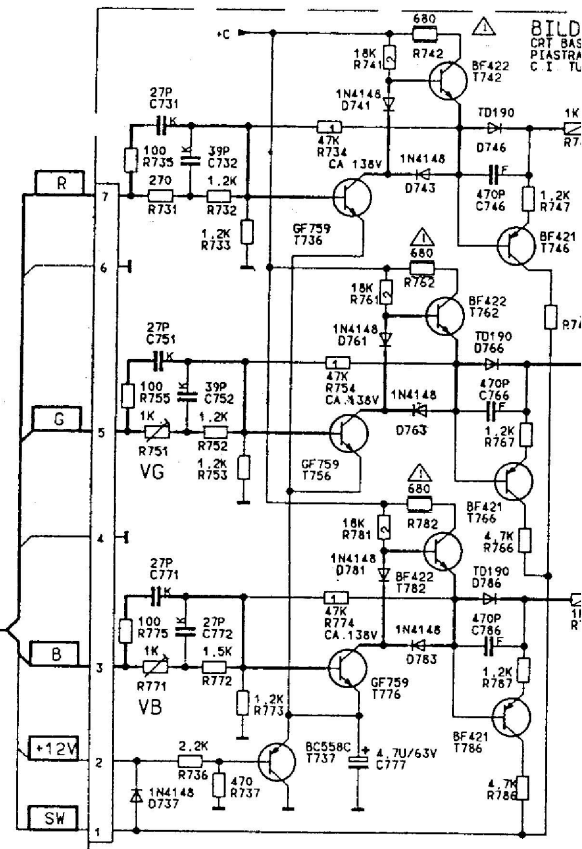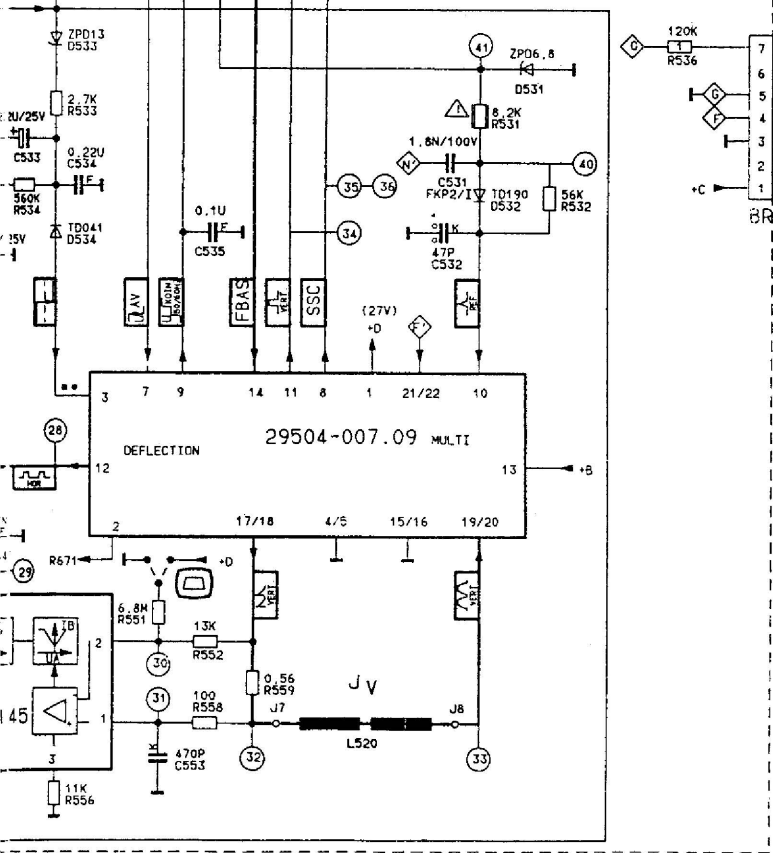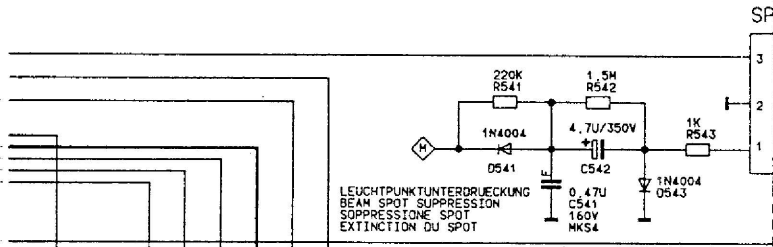

CUC 3510

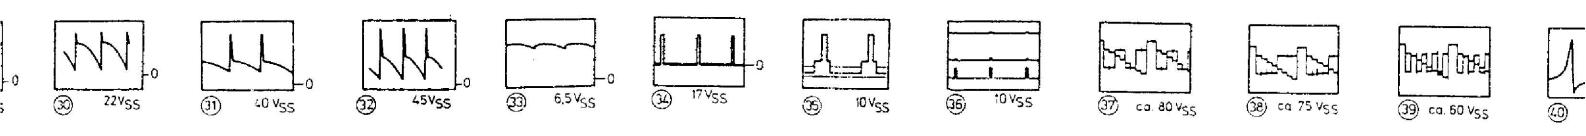

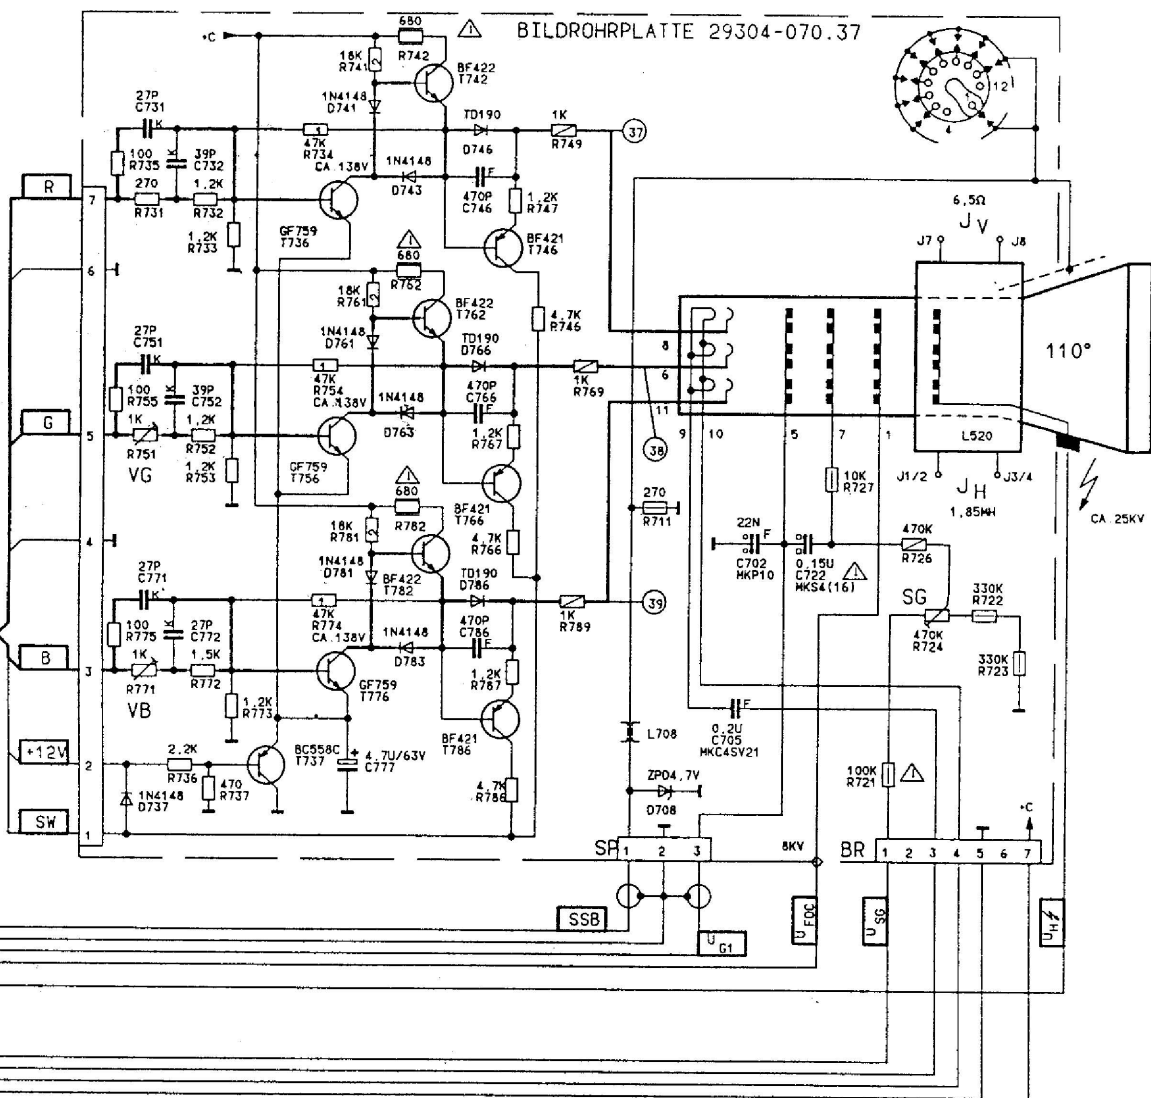

CUC 3510

ADJUSTMENT OF LINE FREQUENCY

Line Frequency:

1. Short circuit Pin 11, IC 2705 (TDA 2595) to chassis.
2. With the adjustment control R 2731 adjust so, that the picture runs through slowly.
3. Remove the short circuit.

