

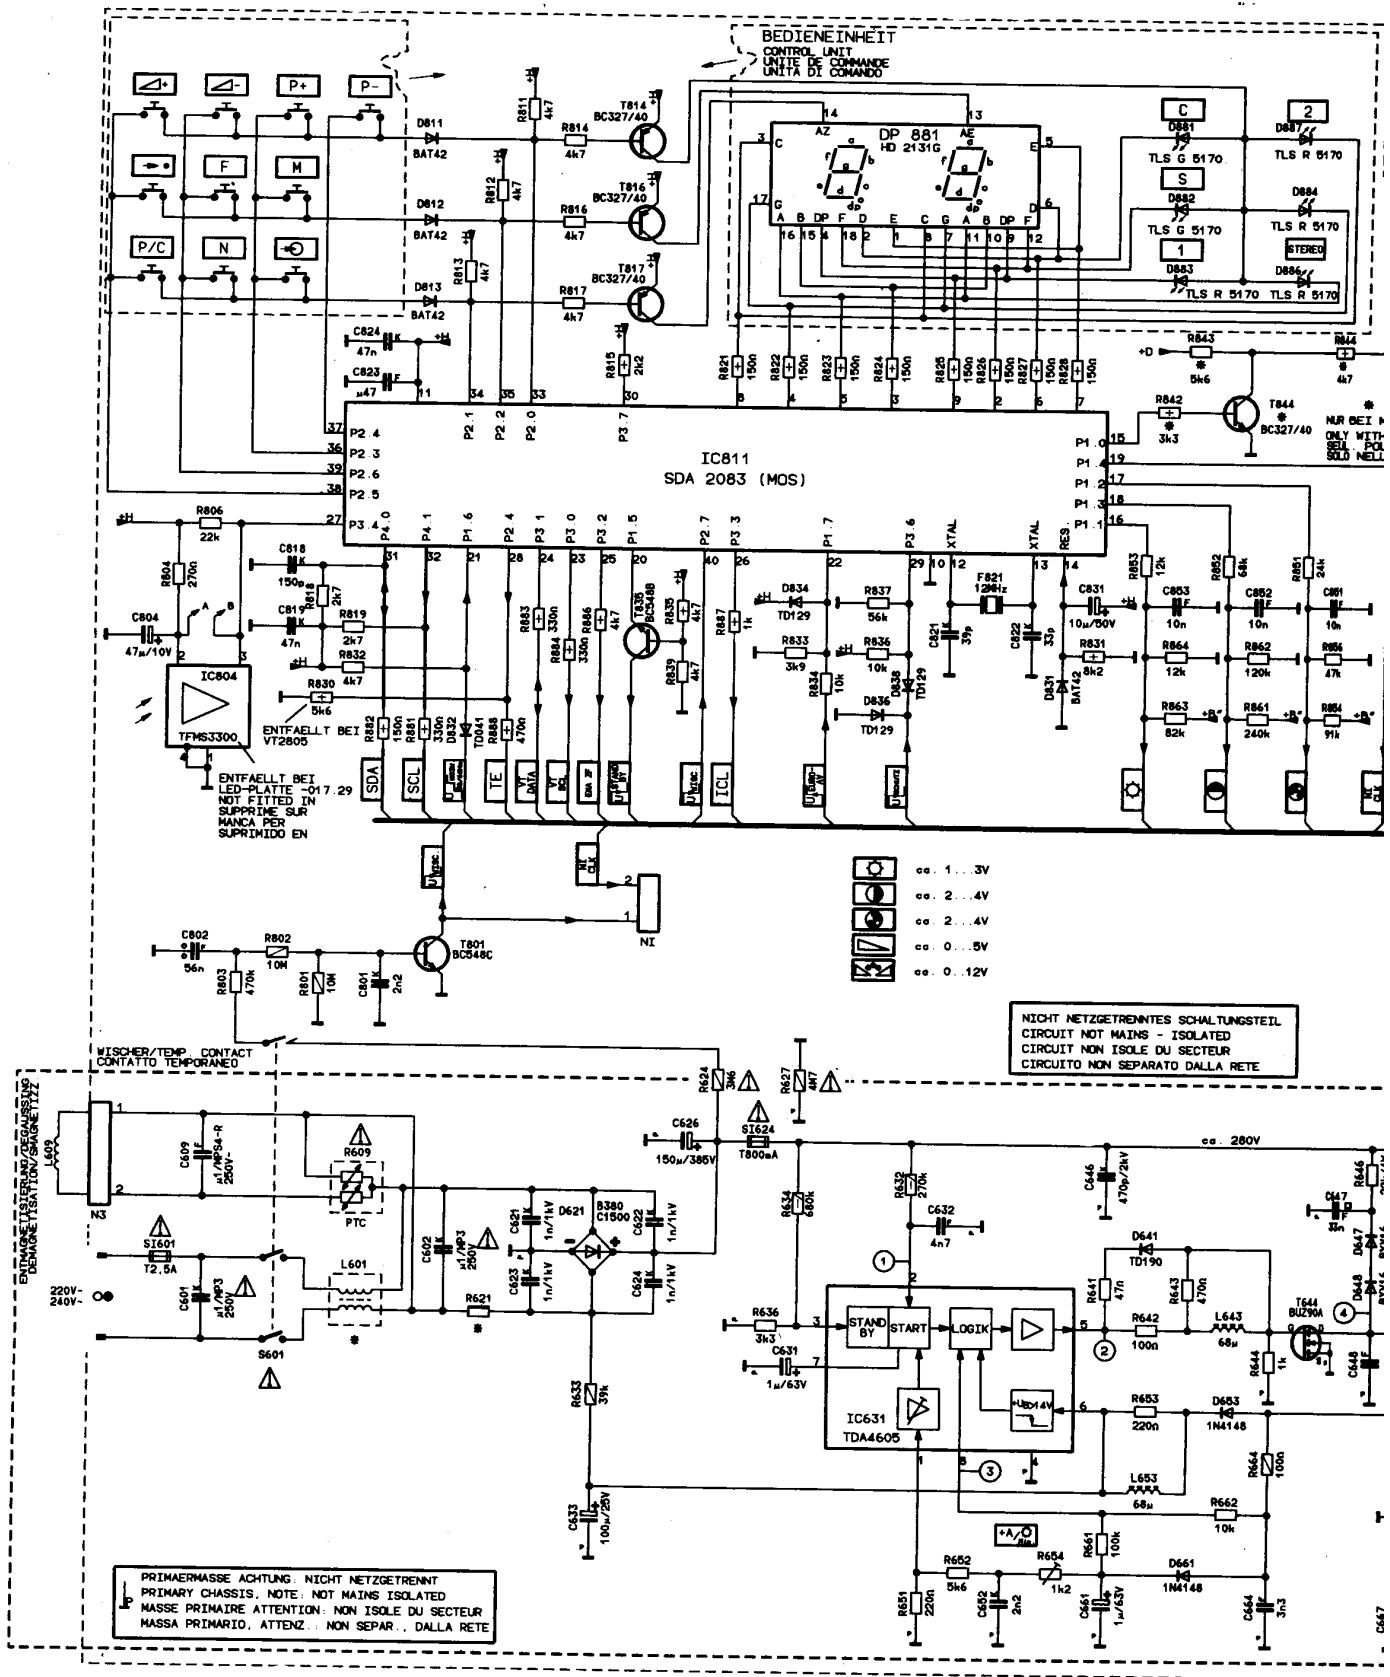



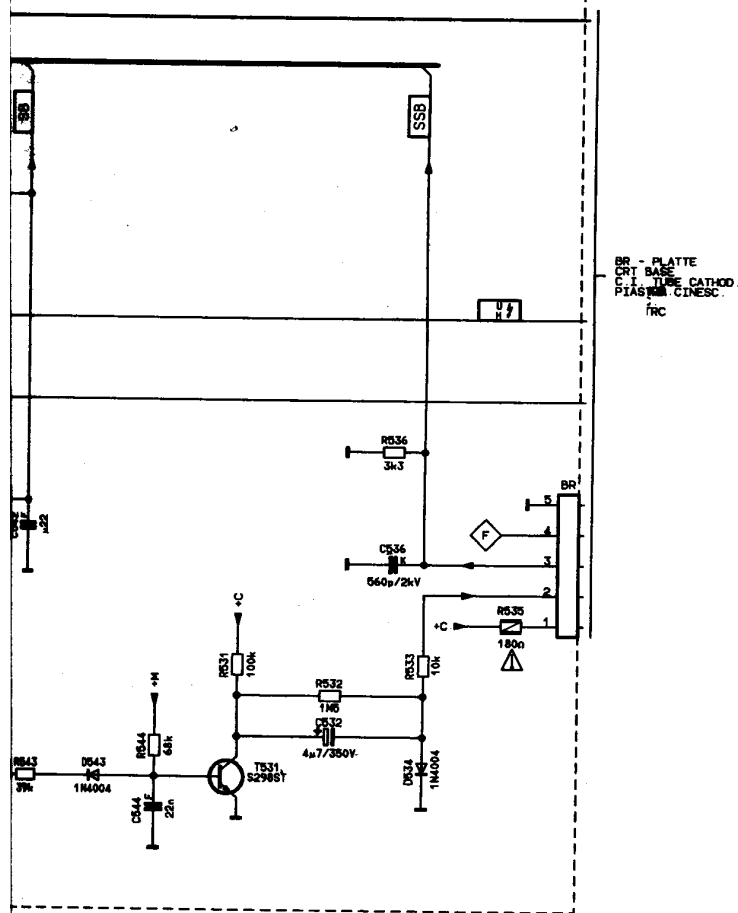

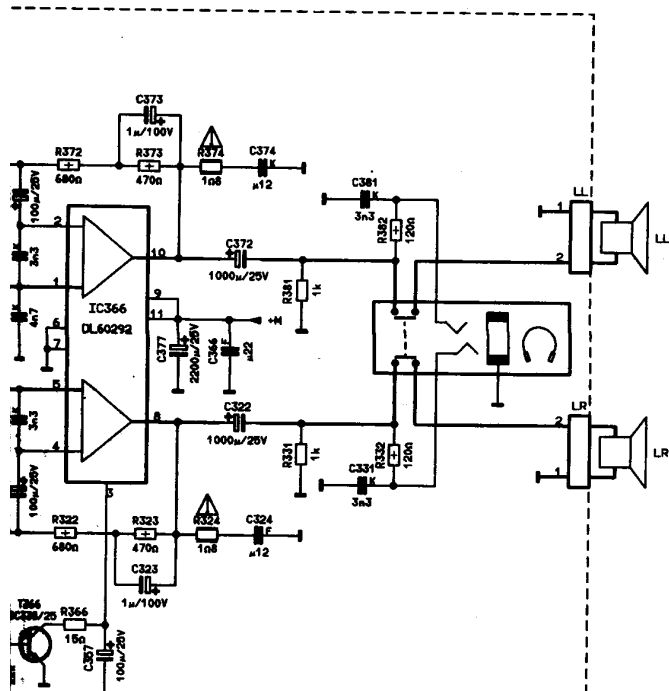

ZUM FARB-RGB
TO COLOUR RGB
VERS MOD. DECODEUR RYB
AL MOD. COLORE RYB
A CROMA/RGB


ZUM CHASSIS
TO CHASSIS
VERS CHASSIS
AL TELAIO
AL CHASSIS

ZUM ZEILENTR.
TO LINE TRANSFORMER
VERS TRANSF. ALIMENT.
ALLO TRANSF. DI RETE
AL TRANSF. DE LINEAS

D RV Regelspannungsverzögerung (Tuner)

Normtestbild auf hohen UHF Kanal legen, die HF sollte mindestens 1,5 mV betragen (rauschfreies Bild). Regler R 341 (Kontakt 15, ZF-Verst.) in Richtung Linksanschlag drehen bis das Bild zu rauschen beginnt, dann wieder zurückdrehen bis das Bild gerade rauschfrei wird.

GB RV D (Tuner)
Feed range (noise IF-Am begin of the

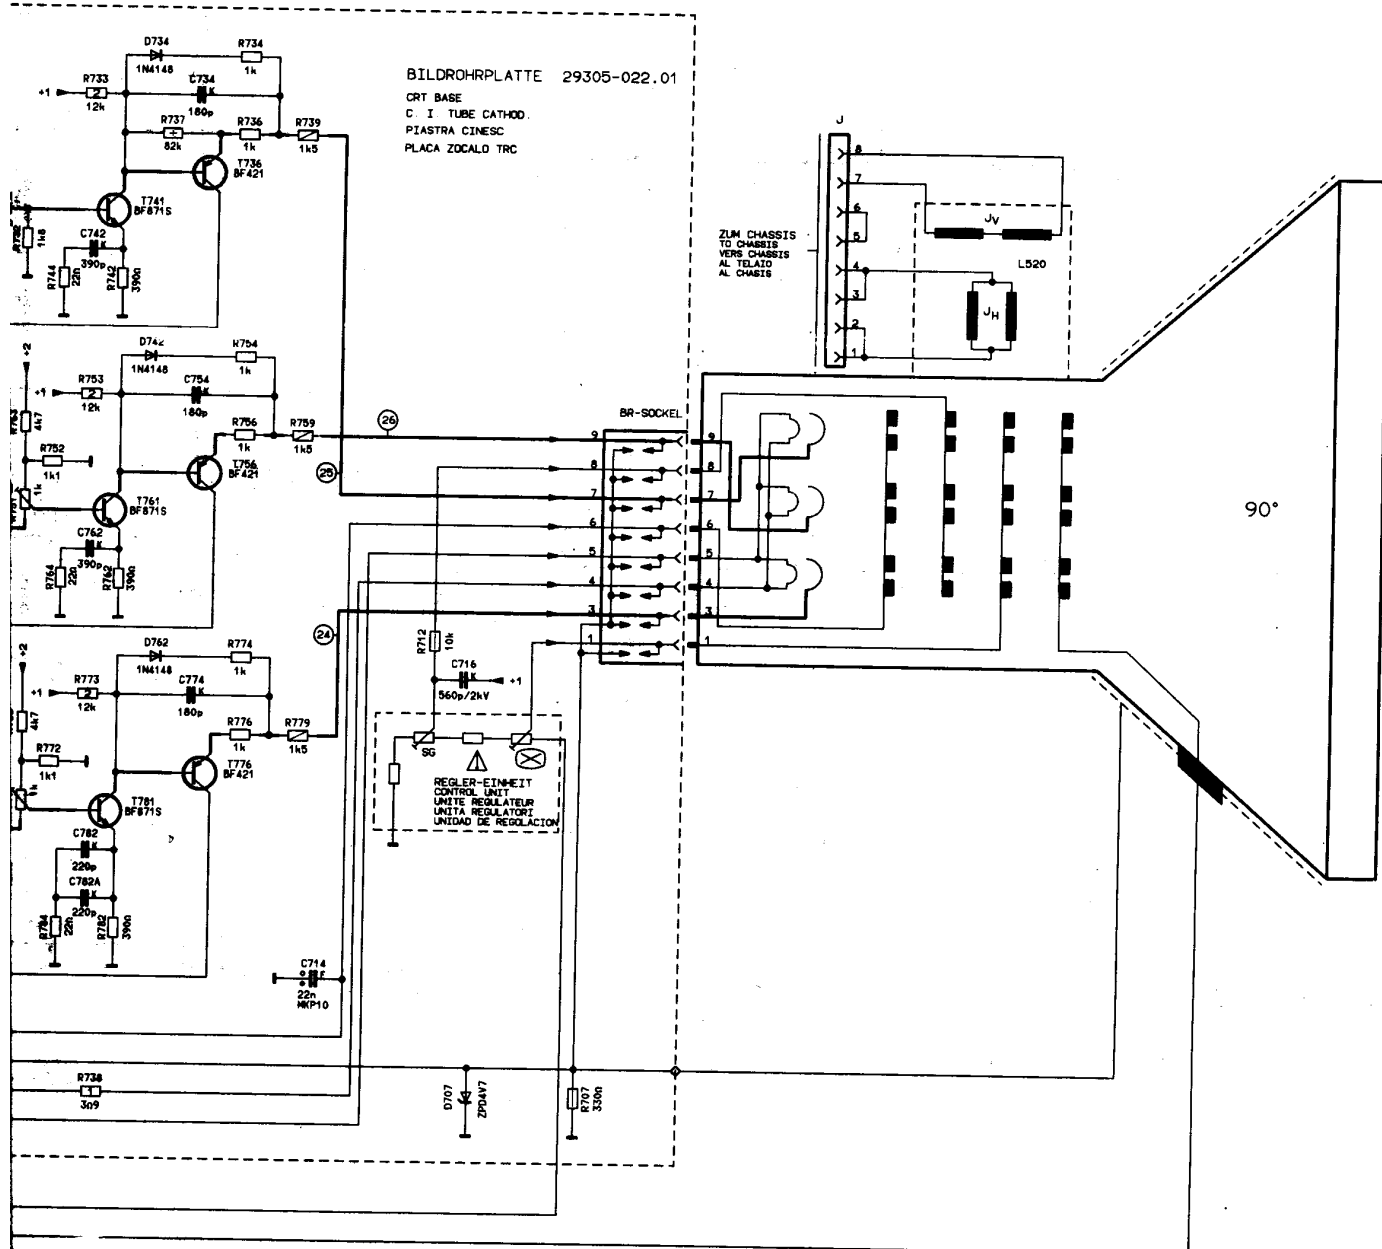

(GB)

RV Delayed Automatic Gain Control Voltage (Tuner)

Feed in a standard test pattern at a channel in the upper range of the UHF Band. The RF should be at least 1.5 mV (noise free picture). Rotate the control R 341 (contact 15, IF-Ampl.) towards the left hand and stop until noise just begins to appear in the picture, then reverse the direction of the control until the picture just becomes noise free.