

Service Manual



Colour Television

TX-28SL20C

EURO-4H Chassis

SPECIFICATIONS

Power Source:	220-240V a.c., 50Hz
Power Consumption:	121W
Standby Power Consumption:	1,4W
Aerial Impedance:	75Ω unbalanced, Coaxial Type
Receiving System:	PAL-B/G, H, D/K, PAL-525/60 SECAM B/G, D/K M.NTSC NTSC (AV only)
Receiving Channels:	
VHF E2-E12	VHF H1-H2 (ITALY)
VHF A-H (ITALY)	VHF R1-R2
VHF R3-R5	VHF R6-R12
UHF E21-E69	CATV (S01-S05)
CATV S1-S10 (M1-M10)	CATV S11-S20 (U1-U10)
CATV S21-S41 (HYPERBAND)	
Intermediate Frequency:	
Video	38,9MHz
Sound	33,16MHz, 33,4MHz 32,4MHz (A2 STEREO) 33,05MHz, 34,05MHz (NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz (SECAM)
Colour	
Video/Audio Terminals:	
AUDIO MONITOR OUT	Audio (RCaX2) 500mV rms 1kΩ
AV1 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin)
AV1 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV2 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y: 1V p-p 75Ω (21 pin) C: 0,3V p-p 75Ω
AV2 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Selectable Output (21 pin)
High Voltage:	28kV ± 1kV
Picture Tube:	A66ECF50X82 66cm
Audio Output:	2 x 15W (Music Power) 8Ω Impedance Remote Control 2 x R6 (UM3) Batteries
Accessories supplied:	
Dimensions:	
Height:	596,5mm
Width:	778mm
Depth:	481mm
Net Weight:	32kg
Specifications are subject to change without notice.	
Weights and dimensions shown are approximate.	
NOTE: This Service Manual should be used in conjunction with the EURO-4H technical guide.	

TECHNISCHE DATEN

Netzspannung:	220-240V a.c., 50Hz
Leistungsaufnahme:	121W
Standby Leistungsaufnahme:	1,4W
Antennenimpedanz:	75Ω asymmetrisch, Koaxial-Typ
Empfangssystem:	PAL-B/G, H, D/K, PAL-525/60 SECAM B/G, D/K M.NTSC NTSC (nur AV Eingang)
Empfangsbereiche:	
VHF E2-E12	VHF H1-H2 (ITALY)
VHF A-H (ITALY)	VHF R1-R2
VHF R3-R5	VHF R6-R12
UHF E21-E69	CATV (S01-S05)
CATV S1-S10 (M1-M10)	CATV S11-S20 (U1-U10)
CATV S21-S41 (HYPERBAND)	
Zwischenfrequenz:	
Video	38,9MHz
Sound	33,16MHz, 33,4MHz 32,4MHz (A2 STEREO) 33,05MHz, 34,05MHz (NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz (SECAM)
Colour	
Video/Audio Anschlüsse:	
AUDIO MONITOR OUT	Audio (RCaX2) 500mV rms 1kΩ
AV1 EINGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin)
AV1 AUSGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV2 EINGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y: 1V p-p 75Ω (21 pin) C: 0,3V p-p 75Ω
AV2 AUSGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Wählbarer Ausgang
Hochspannung:	28kV ± 1kV
Bildrohre:	A66ECF50X82 66cm
Ton Ausgangsleistung:	2 x 15W (Musikleistung)
Lautsprecher	8Ω Impedanz
Mittel. Zubehör:	Fernbedienung 2 x R6 (UM3) Batterien
Abmessungen:	
Höhe:	596,5mm
Breite:	778mm
Tiefe:	481mm
Gewicht:	32kg
Änderungen der Technischen Daten vorbehalten.	
Gewichte und Abmessungen sind Näherungsangaben.	
Hinweis: Bitte verwenden Sie das Service Manual zusammen mit dem Technical Guide.	

SELF CHECK

1. Self-check is used to automatically check the bus lines and hexadecimal code of the TV set.
2. To get into the Self-Check mode press the down (**-Iv**) button on the customer controls at the front of the set, at the same time pressing the **STATUS** button on the remote control, and the screen will show :-

VPC	O.K.	PCB	O.K.
CIP	O.K.	Cab	O.K.
SRC	O.K.		
DDP	O.K.		
TUN	O.K.		
E2	O.K.		
MSP	O.K.		
DPL	- -		
OPTION1	3D		
OPTION2	1C		
OPTION3	1D		
OPTION4	40		
OPTION5	CF		
OPTION6	A1		

SELBSTDIAGNOSE

1. Die Selbstdiagnose dient zum automatischen Prüfen der Bus-Leitungen sowie des Hexadezimalcodes des FS-Geräts. Zum Umschalten auf Selbstdiagnose zunächst die Taste "**STATUS**" auf der Fernbedienung und gleichzeitig die-Taste am Bedienteil des FS-Gerätes drücken (**-Iv**), auf dem Bildschirm erscheint hierauf :-
2. Nach der Selbstdiagnose wird das Gerät automatisch auf sämtliche werksseitigen Standardeinstellungen zurückgesetzt :-

If the CCU ports have been checked and found to be incorrect or not located then " - - " will appear in place of "O.K.". Wenn der Hauptprozessor (CCU) an den Anschlüssen einen Fehler erkennt, oder der entsprechende Anschluss nicht belegt ist, zeigt die entsprechende Position " - - " anstelle von OK an.

Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- **LUCI** interface kit (**L**inked **U**tility **C**omputer **I**nterface)
Part number: TZS6EZ002
This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.
- **VICI** (**V**isual **I**nteractive **C**omputer **I**nformation)
These C.D.'s contain multimedia documentation providing quick access to service information.
Part No. TZS7EZ006, TZS7EZ005 & TZS8EZ001
 1. Service Manuals
 2. Instruction Books
 3. Technical Information
- **TASMIN** (**T**echnically **A**dvanced **S**ystem for **M**ultimedia **I**nteractive **N**otes)
As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.
- To assist in servicing of the F-board, an extension lead kit is available, part no. TZS9EK008.

Service-Hilfen

Zur Unterstützung der Servicearbeiten stehen weitere Hilfsmittel zur Verfügung.

- **LUCI** interface kit (PC-unterstütztes Diagnosesystem)
Bestell-Nr.: TZS6EZ002
Es beinhaltet ein Interface, die Anschlusskabel zum FS-Gerät und die Diagnose-Software. Bei Einführung von neuen Modellen ist ein Update der Software jederzeit möglich.
- **VICI** (Interaktive CD-ROM) mit schnellem Zugriff auf Serviceinformationen.
Bestell-Nr.: TZS7EZ006, TZS7EZ005 & TZS8EZ001
 1. Service Manuals
 2. Bedienungsanleitungen
 3. Technical Information
- **TASMIN** (Technisch erweitertes System für interaktive Multimedia-Hinweise und Notizen)
Genauso wie dieses Produkt einen ersten Schritt in Richtung erweitertes interaktives Training bereitstellt, ermöglicht es einen noch schnelleren Zugang zu technischen Informationen.
- Um Servicearbeiten auf dem F-Bord durchzuführen, steht ein Satz Verlängerungskabel unter der Bestellnummer TZS9EK008 zur Verfügung.

ADJUSTMENT PROCEDURE


Item/Preparation	Adjustments
+B SET-UP 1. Receive a Greyscale signal. 2. Set the controls:- Brightness: Minimum Contrast: Minimum Volume: Minimum	1. Set the +B voltage up as follows:- Adjust R811 so that B2 shows 148V±1V 2. Confirm the following voltages. B9 5 ± 0,25V B10 5 ± 0,25V B5 12 ± 0,5V B11 33 ± 1,5V B4 16 ± 1V B7 8 ± 0,5V B12 26 ± 2V B8 6 ± 0,5V B3 36 ± 1,5V B13 13 ± 1V B1 205 ± 10V B14 14 ± 1V
Cut-Off / Ug2 Test 1. Receive a Greyscale signal. 2. Degauss the tube externally. 3. Set the TV into Service Mode 1. 4. Select Cutoff mode.	To adjust Cutoff connect an oscilloscope to the Blue cathode. Press " STR " and adjust "cutoff" value using the " Yellow " and " Blue " buttons until the black level is 160V ± 5V, press " STR " to store the value. Remove the oscilloscope. Select Ug2 adjustment and adjust the screen VR until the display shows "O.K."

ABGLEICH


Vorbereitungen	Abgleich
+B - Abgleich 1. Testbild empfangen. Helligkeit auf: Minimum Kontrast auf: Minimum Lautstärke: Minimum	1. Mit R811 muß die B2 auf 148V±1V eingestellt werden. 2. Folgende Spannungen sind zu überprüfen. B9 5 ± 0,25V B10 5 ± 0,25V B5 12 ± 0,5V B11 33 ± 1,5V B4 16 ± 1V B7 8 ± 0,5V B12 26 ± 2V B8 6 ± 0,5V B3 36 ± 1,5V B13 13 ± 1V B1 205 ± 10V B14 14 ± 1V
Cut-Off / Ug2 Test 1. Testbild empfangen. 2. Bildröhre entmagnetisieren. 3. Service-Mode 1 anwählen. 4. Im Service-Mode den Abgleichpunkt Cutoff DC-Mode wählen.	Einen Oszillographen an die blaue Katode der Bildröhre anschliessen. STR -Taste drücken und Mit der gelben und blauen Taste den CUT-OFF Wert auf 160V ± 5V abgleichen und mit der STR -Taste abspeichern. Den Oszillograph entfernen und den Ug2 Test aufrufen. Den Abgleichwert solange ändern, bis OK auf dem Bildschirm erscheint. Den Wert abspeichern.

WAVEFORM PATTERN TABLE


Vert Out
IC601 Pin 31




Vert Drive
IC451 Pin 2




VFLB
IC451 Pin 3




H - Out
IC601 Pin 50




H - Out
IC701 Pin 5




H - Pulse
Base Q503




HFLB
IC601 Pin 13



HFLB
IC701 Pin 8




Video Out
IC601 Pin 59




R - Out
IC601 Pin 37




G - Out
IC601 Pin 38




B - Out
IC601 Pin 39




R - Out
E8 Pin 5




G - Out
E8 Pin 3




B - Out
E8 Pin 4



SCL
IC1201 Pin 3



SVM Out
IC601 Pin 34




SIGNAL TABELLE

ALIGNMENT SETTINGS:

(The figures below are nominal and used for representative purposes only.)

1. Set the Bass to maximum position, set the Treble to minimum position, press the volume down button (-V) on the customer controls at the front of the TV and at the same time press the **INDEX** button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the "**N**" button.


Alignment Function		Settings / Special features
Horizontal Position	H-Pos 061	Optimum setting.
Vertical Position	V-Pos 005	Optimum setting.
Horizontal Amplitude	H-Amp 055	Optimum setting.
Vert. Amplitude	V. Amp 054	Optimum setting.
EW-amplitude	E/W-Amp1 -128	Optimum setting.
EW-amplitude	E/W-Amp2 006	Optimum setting.
Trapezium-comp	Trapez-1 047	Optimum setting.
Trapezium-comp	Trapez-2 -128	Optimum setting.
Vertical Linearity	V-Lin 006	Optimum setting.
Vertical Symmetry	V-Sym 002	Optimum setting.
DVCO	DVCO -005	Receive a PAL Colour Bar Pattern. For DVCO alignment press " Blue " button, wait until the colours are changing slowly and press " STR ".
Cut-off DC	Cut-off 0171	To adjust Cutoff connect an oscilloscope to the Blue cathode. Press " STR " and adjust "cutoff" value using the " Yellow " and " Blue " buttons until the black level is $160V \pm 5V$ press " STR " to store the value. Remove the oscilloscope. Select Ug2 adjustment and adjust the screen VR until the display shows "O.K."
Ug2 Test	Ug2 055 O.K.	
Highlight Lowlight	High 0902 0777 0864 Low 0117 0132 0112	Optimum setting.
Sub-Brightness	Sub-Brightness 255	Optimum setting.



ABGLEICHTABELLE

(Die angegebenen Werte sind Mittelwerte und Können individuell nach oben oder unten nach dem korrekten Abgleich abweichen.)


1. Um in den Service-Mode zu gelangen, gehen sie bitte wie folgt vor.
2. Stellen sie im Toneinstellungs-Menü die Bässe auf Maximun und die Höhen auf Minimum.
3. Halten sie die **INDEX**-Taste auf der Fernbedienung gedrückt und drücken zusätzlich die Taste **-IV** im Bedienteil des TV-Gerätes. Auf dem Bildschirm erscheint die entsprechende Anzeige für den Service-Mode.
4. Die einzelnen Funktionen mit Hilfe der **ROTEN** und **GRÜNEN** Taste anwählen.
5. Mit der **GELBEN** und **BLAUEN** Taste die Werte der einzelnen Funktionen ändern.
6. Nach jeder Einstellung die Taste **STR** auf der Fernbedienung drücken, um die geänderten Werte abzuspeichern.
7. Zum Verlassen des Service-Modus die **"N"** - Taste auf der Fernbedienung drücken.

Abgleichfunktion		Einstellung / Besondere Merkmale
Horizontale position	H-Pos 061	Optimale Einstellung.
Vertikale Position	V-Pos 005	Optimale Einstellung.
Horizontale Amplitude	H-Amp 055	Optimale Einstellung.
Vertikale Amplitude	V-Amp 054	Optimale Einstellung.
OW-amplitude	EW-Amp1 -128	Optimale Einstellung.
OW-amplitude	EW-Amp2 006	Optimale Einstellung.
Trapez-Kompensation	Trapez-1 047	Optimale Einstellung.
Trapez-Kompensation	Trapez-2 -128	Optimale Einstellung.
Vertikale linearität	V-Lin 006	Optimale Einstellung.
Vertikale Symmetrie	V-Sym 002	Optimale Einstellung.
DVCO	DVCO -005	Ein Farbbalken-Testbild empfangen. Zum Abgleich des Farboszillators (DVCO) die blau Taste drücken. Nachdem ein leichtes Flackern in den Farbbalken zum Stillstand gekommen ist, die STR -Taste drücken.
Cut-off	Cut-off 0171	Einen Oszillographen an die blaue Katode der Bildröhre anschliessen. STR -Taste drücken und Mit der gelben und blauen Taste den CUT-OFF Wert auf $160V \pm 5V$ abgleichen und mit der STR-Taste abspeichern. Den Oszillograph entfernen und den Ug2 Test aufrufen. Den Abgleichwert solange ändern, bis OK auf dem Bildschirm erscheint. Den Wert abspeichern. 
Ug2 Test	Ug2 055 O.K.	
Highlight Lowlight	High 0902 0777 0864 Low 0117 0132 0112	Optimale Einstellung.
Sub-Brightness	Sub-Brightness 255	Optimale Einstellung.

VIDEO BLOCK DIAGRAM


BILD SIGNAL BLOCKSCHEMA

10

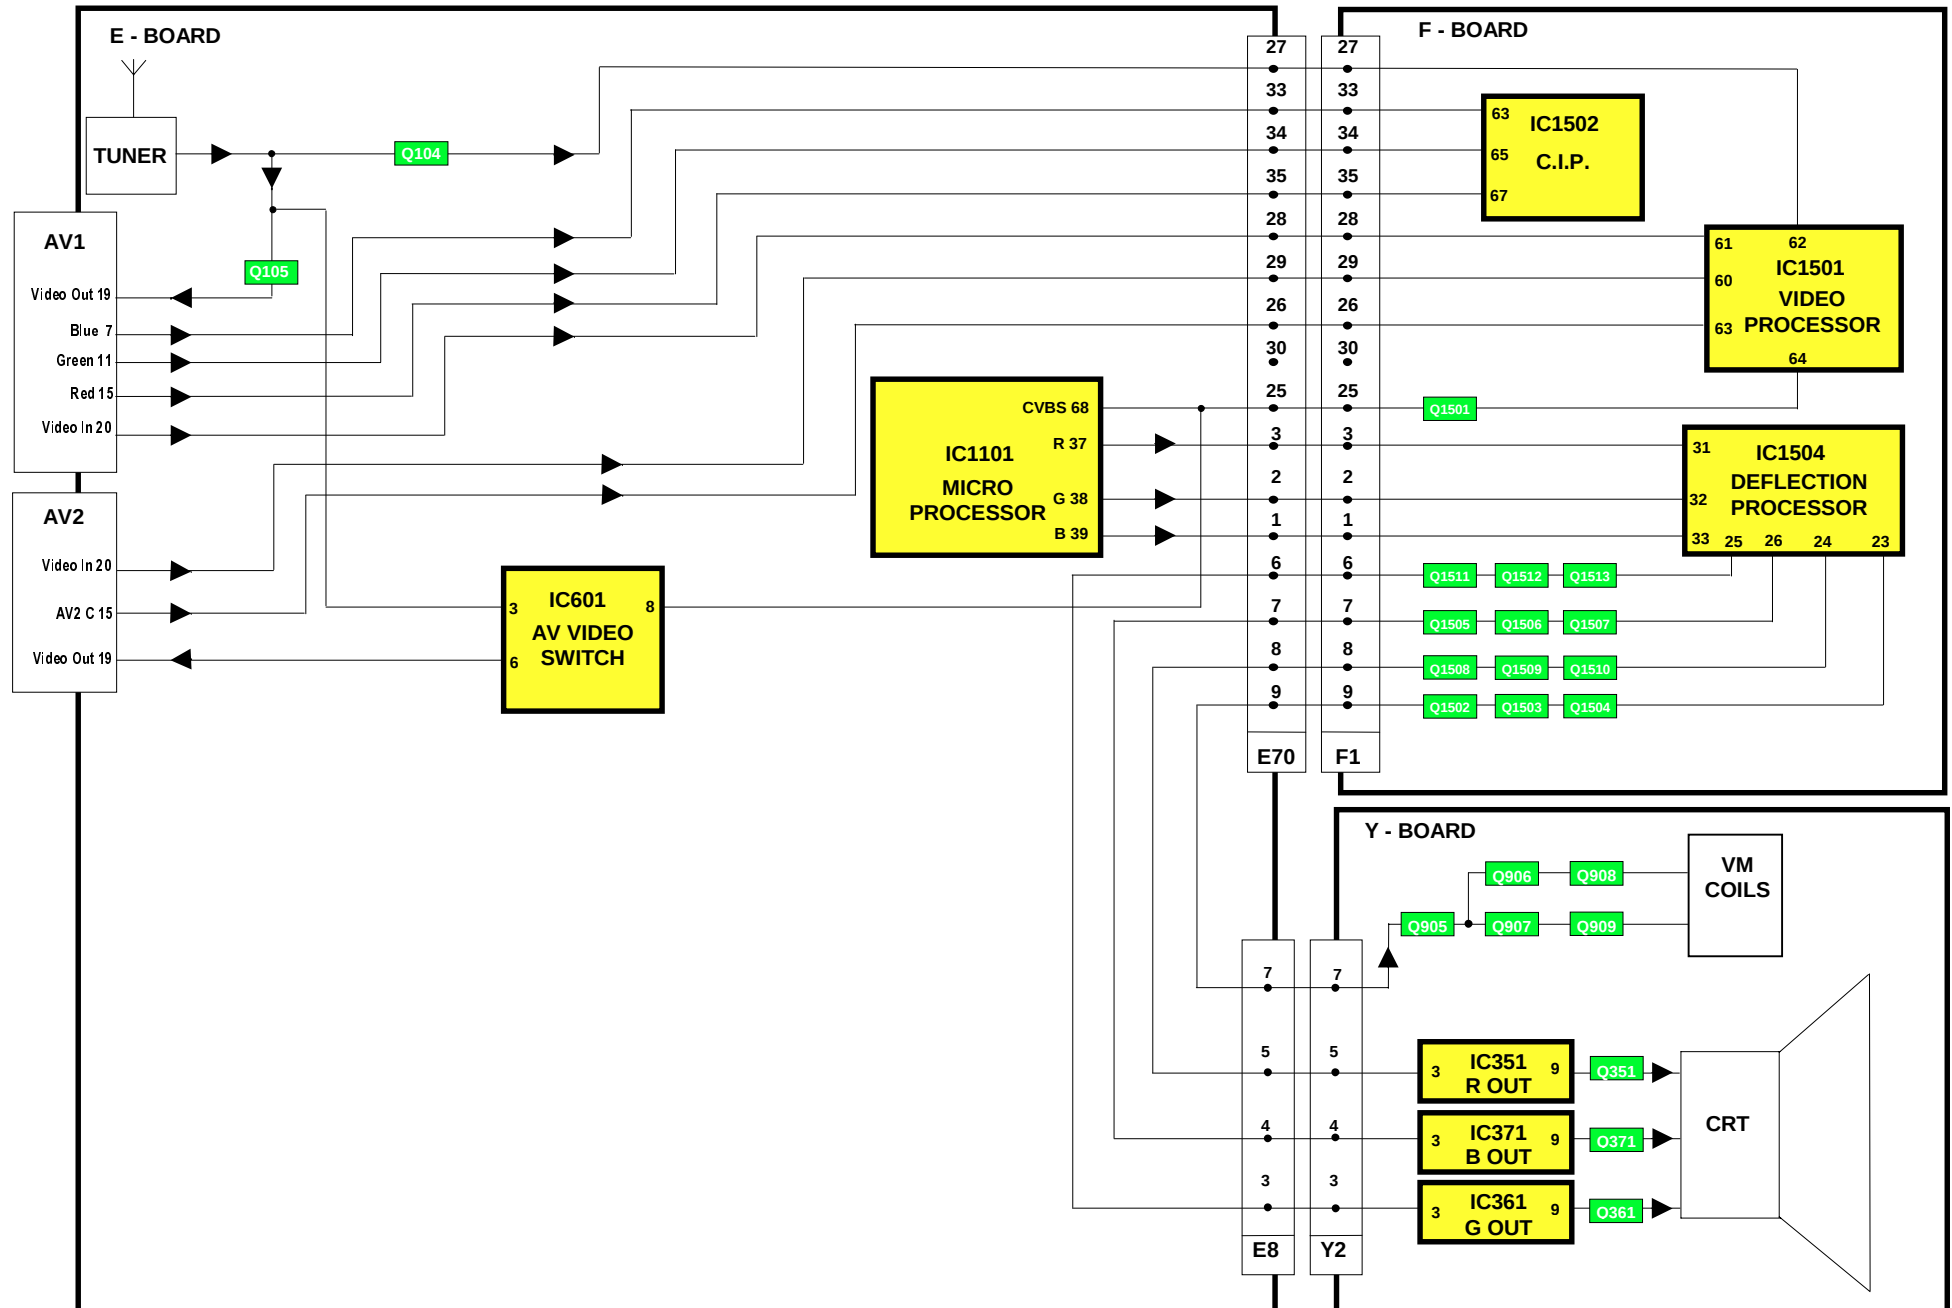


AUDIO BLOCK DIAGRAM

TONSIGNAL BLOCKSCHEMA

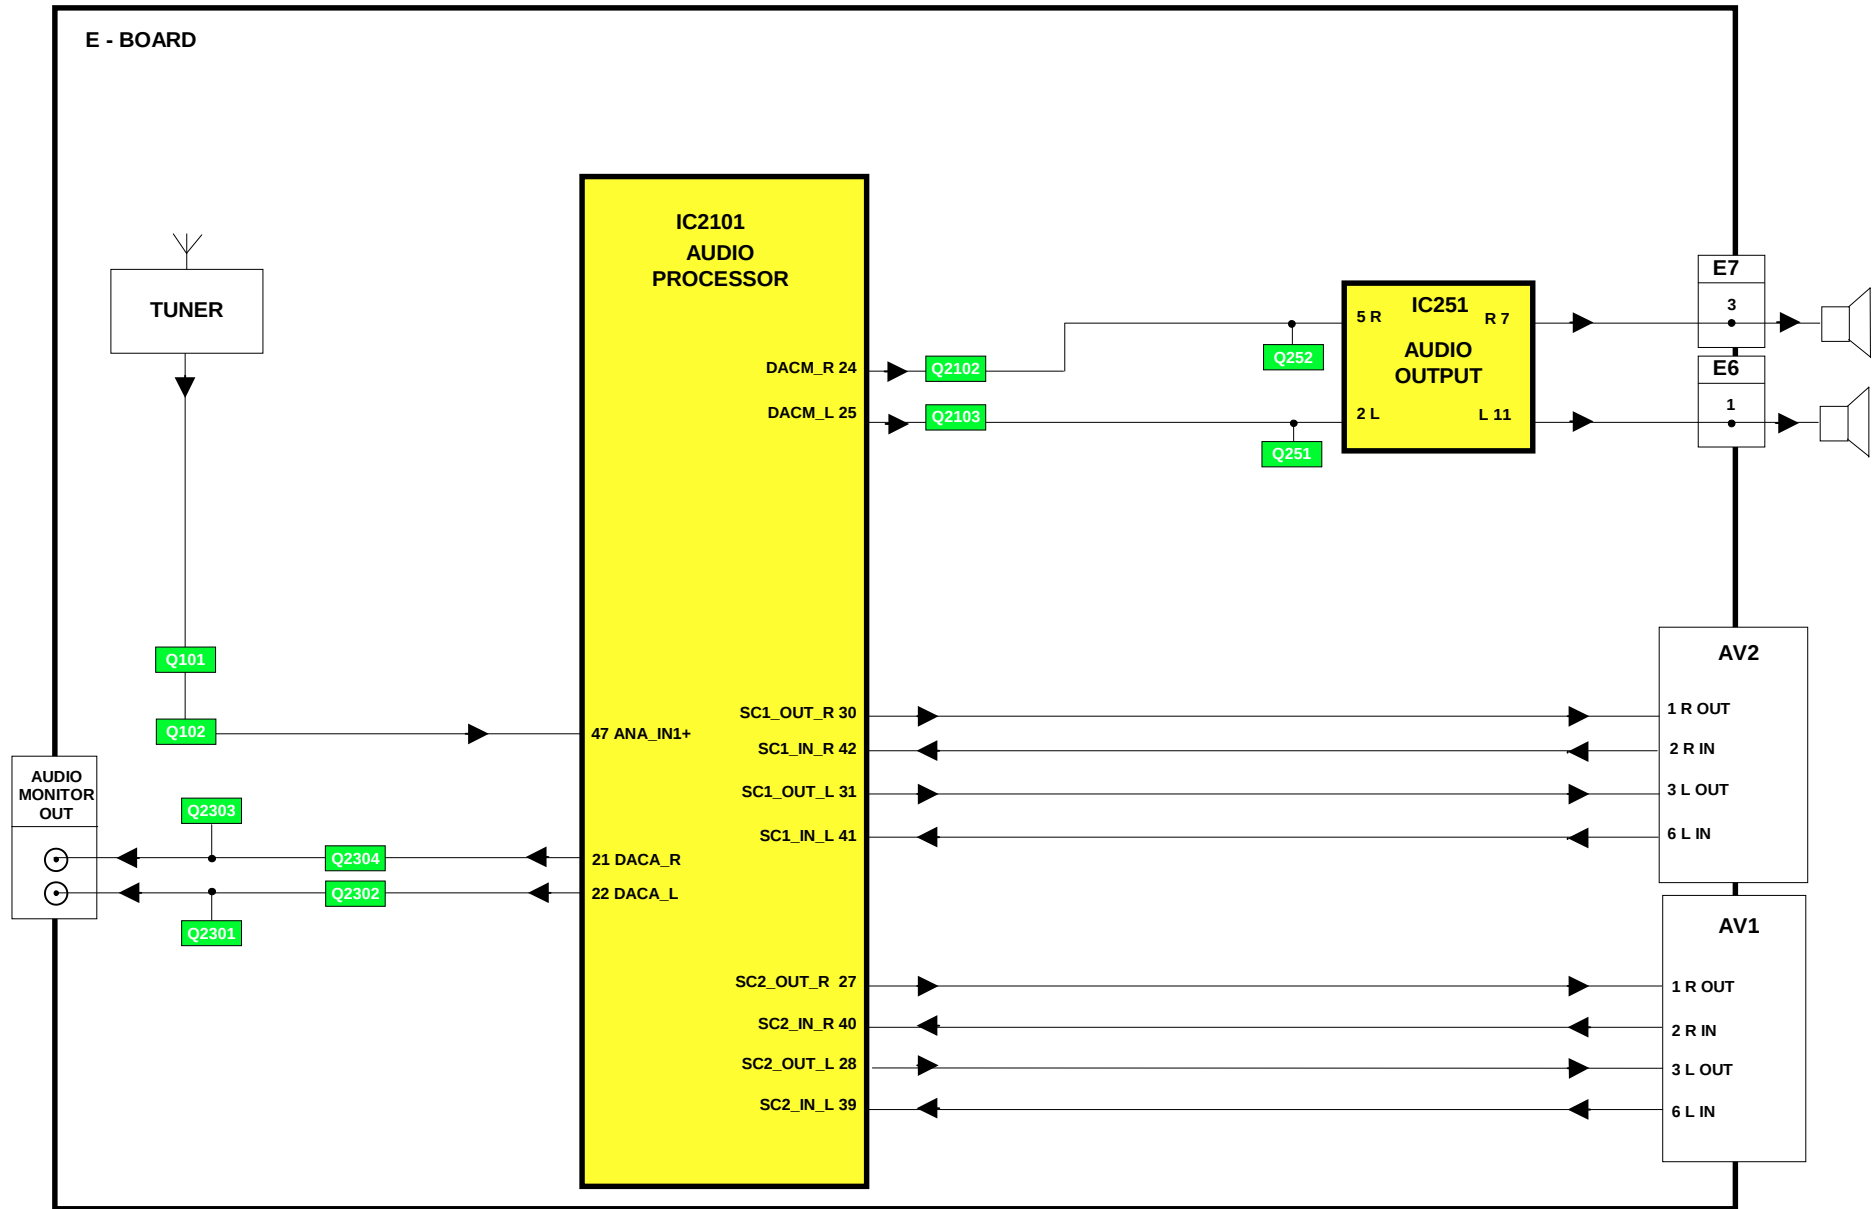

CONTROL BLOCK DIAGRAM


STROMVERSORGUNGS BLOCKSCHEMA

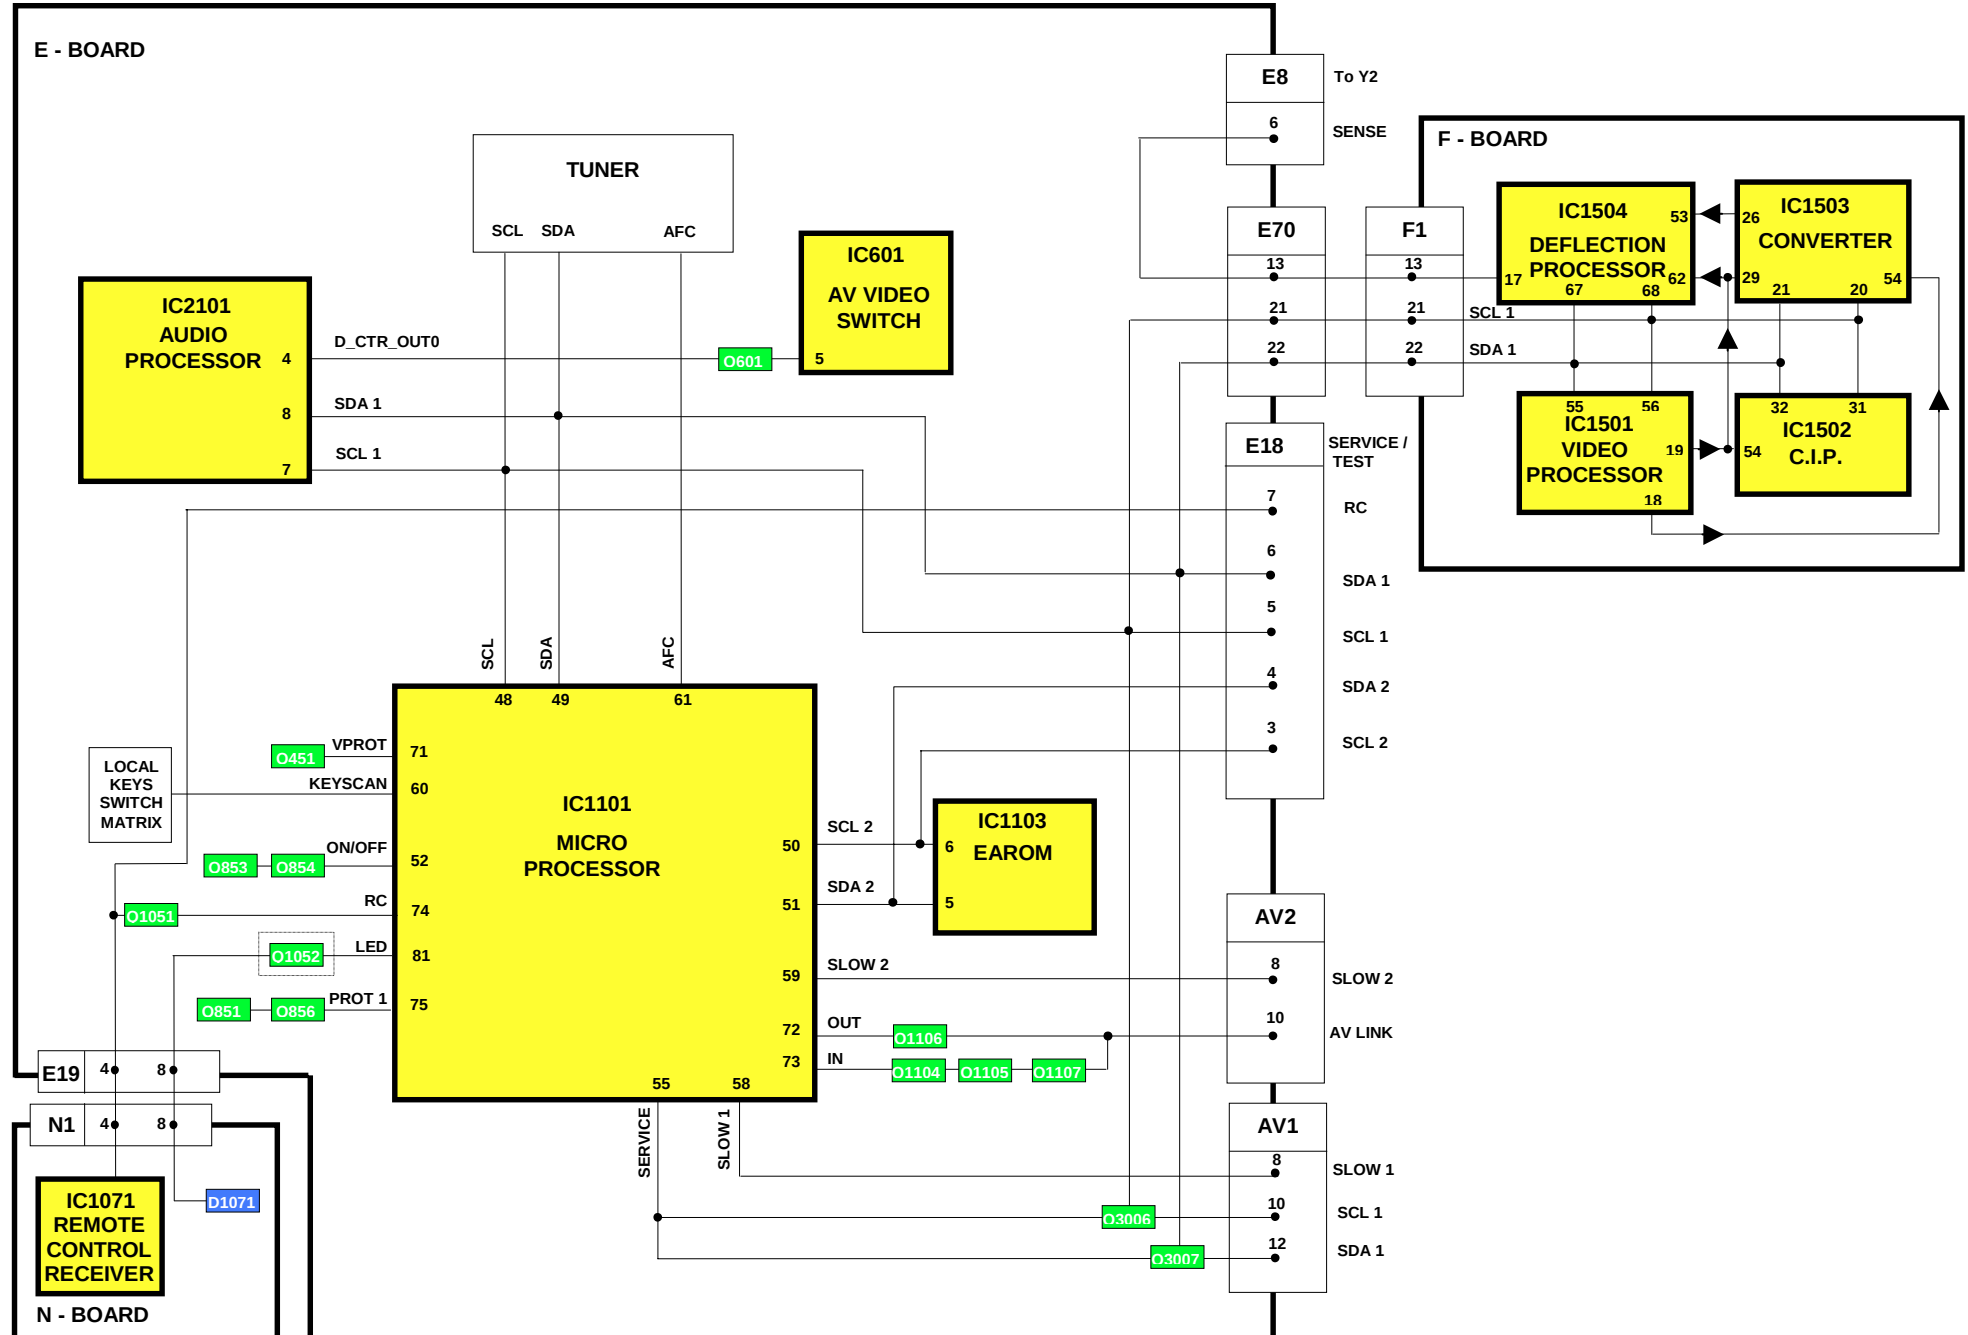

POWER SUPPLY BLOCK DIAGRAM

STROMVERSORGUNGS BLOCKSCHEMA

13

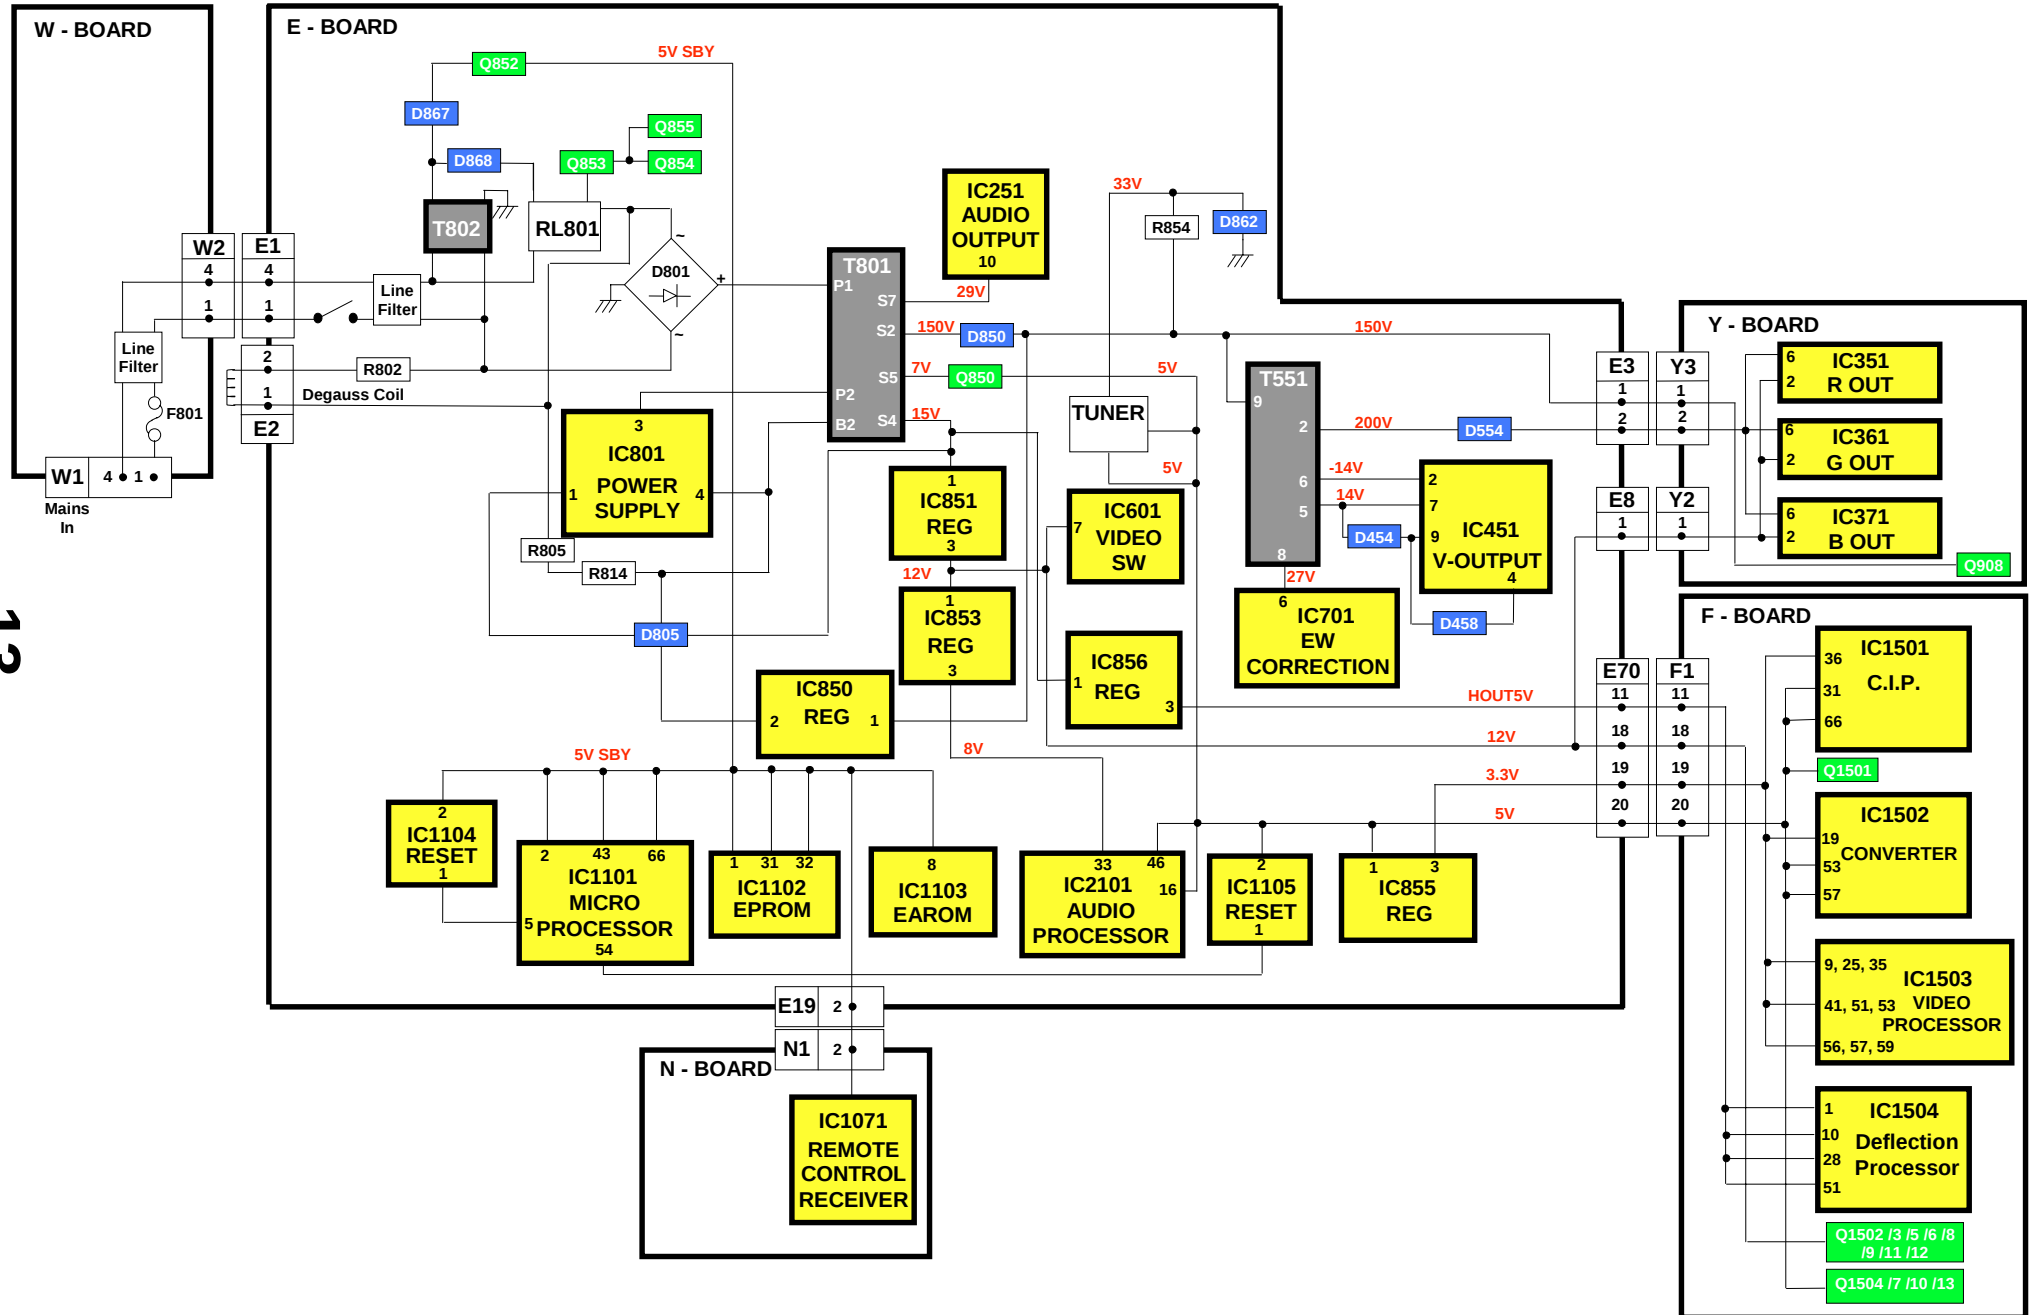

REPLACEMENT PARTS LIST

Important Safety Notice

Components Identified by  mark have special characteristics important for safety.
When replacing any of these components, use only manufacturers specified parts.
* In case of ordering these spare parts, please always add the complete Model-Type number to your order.

Cct Ref	Parts Number	Description	
MECHANICAL PARTS			
1	A66ECF50X82	C.R.T.	
2	EASG15S505A2	SPEAKER	
3	ENG27507GR	TUNER	
4	EUR511211	REMOTE CONTROL	
5	TBM8E1728	PANASONIC BADGE	
6	TBX8E056	POWER BUTTON	
7	TKP8E1235-2	DOOR LID	
8	TKP8E1296-1	REAR AV PANEL	
9	TKU8E00320	BACK COVER	
10	TKY8E307	CABINET	
11	TLK8E05140	DEGAUSS COIL	
12	TMX8E042	CHASSIS FRAME	
13	TNP8EE013AG	E P.C.B.	
14	TNP8EF007AA	F P.C.B.	
15	TNP8EN016AA	N P.C.B.	
16	TNP8EP017AA	P P.C.B.	
17	TNP8EW002AA	W P.C.B.	
18	TNP8EY018AA	Y P.C.B.	
19	TQF8E2928	MODEL LABEL	
20	TSX8E0027	POWER CORD	
21	TXJ/FCODEG	FOCUS LEAD ASSY	
22	UR51EC904A	BATTERY COVER (REMOTE)	
23	VP17005-32	CRT FIXING SCREW	
24	ZTFM05008A	F.B.T.	
25	ZTUZAE550A	ANODE LEAD	
MISCELLANEOUS COMPONENTS			
	31221212478	FIX CLIP	
	832AG11D-ESL	IC SOCKET	
	F9-4-220	RELAY	
	PLCC-84-T	84 PIN IC SOCKET	
	TBM8E1840	RESET LABEL	
	TEK6940	LID CATCH	
	TES8E015	POWER BUTTON SPRING	
	TMW8E027	LED HOLDER	
	TPC8E4813	OUTER CARTON	
	TPD8E655	TOP CUSHION	
	TPD8E656	BOTTOM CUSHION	
	UM-3DJ-2P	BATTERY PACK	
PCH2	TMX8E041	PCB BRACKET	
PCH3	TMX8E041	PCB BRACKET	
R802	232266296706	THERMISTOR	
INSTRUCTION BOOKS			
	TQB8E2890A	GERMAN	
I.C.s			
IC251	LA4282	AUDIO OUTPUT	
IC351	TDA6111Q-N4	RGB OUTPUT	
IC361	TDA6111Q-N4	RGB OUTPUT	
IC371	TDA6111Q-N4	RGB OUTPUT	
IC381	TL431CLPM	REGULATOR	
IC451	LA7876N	VERTICAL OUTPUT	

ERSATZTEILLISTE

Wichtiger Sicherheitshinweis

Teile, die mit einem Hinweis  gekennzeichnet sind, sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.
Bei der Bestellung von Ersatzteilen, die mit * gekennzeichnet sind, geben Sie bitte unbedingt die vollständige Typenbezeichnung mit an.

Cct Ref	Parts Number	Description	
IC601	TEA2114	VIDEO SWITCHING	
IC701	TEA2031A	E/W CORRECTION	
IC801	STRF6654LF57	POWER SUPPLY	
IC850	SE140N	ERROR AMPLIFIER	
IC851	L78M12MRB	12V REGULATOR	
IC853	AN78L08TA	8V REGULATOR	
IC855	BA033T-M3	REGULATOR	
IC856	AN7805LB	5V REGULATOR	
IC1071	RPM6937-V4	LED RECEIVER	
IC1101	SDA5450C59	MICRO PROCESSOR	
IC1102	27C2001-M0M	EPROM *	
IC1103	XDG2-01MF	EAROM *	
IC1104	MN1381-R(TA)	RESET	
IC1105	MN1381-T(TA)	RESET	
IC1501	VPC3215CB8TP	VIDEO PROCESSOR	
IC1502	CIP3250APSB1	C.I.P.	
IC1503	SDA9401	MICRO PROCESSOR	
IC1504	DDP3310BPSD3	VIDEO PROCESSOR	
IC2101	MSP3400CPOC8	AUDIO PROCESSOR	
FUSES			
F801	19181-3.15	FUSE	
F8011	EYF52BC	FUSE HOLDER	
F8012	EYF52BC	FUSE HOLDER	
DIODES			
C1130	MTZJT-775.6C	DIODE	
D251	MA2180BLFS	DIODE	
D253	MA700TA5	DIODE	
D254	MA700TA5	DIODE	
D351	ERA15-04V3	DIODE	
D352	ERA15-04V3	DIODE	
D361	ERA15-04V3	DIODE	
D362	ERA15-04V3	DIODE	
D371	ERA15-04V3	DIODE	
D372	ERA15-04V3	DIODE	
D376	MA165TA5	DIODE	
D377	MA165TA5	DIODE	
D378	MA165TA5	DIODE	
D387	MA2160LFS	DIODE	
D453	MA165TA5	DIODE	
D454	EU02	DIODE	
D456	MTZJT-775.6C	DIODE	
D457	MA165TA5	DIODE	
D458	EU02	DIODE	
D502	1SR124-4AT82	DIODE	
D511	MA4047	DIODE	
D553	1SR124-4AT82	DIODE	
D554	1SR124-4AT82	DIODE	
D556	MA165TA5	DIODE	
D557	TVSRU2AMLFA5	DIODE	
D558	EU02	DIODE	
D560	RH3GLF102	DIODE	
D580	FMV-3GULF730	DIODE	

Cct Ref	Parts Number	Description
D601	MA165TA5	DIODE
D602	MA165TA5	DIODE
D603	MA165TA5	DIODE
D604	MA165TA5	DIODE
D609	1SR124-4AT82	DIODE
D617	MA3068MTX	DIODE
D620	MA165TA5	DIODE
D701	MA165TA5	DIODE
D702	MTZJT-775.1C	DIODE
D704	MA29TA5	DIODE
D705	MTZJT776.2B	DIODE
D706	MA165TA5	DIODE
D707	AU02V0	DIODE
D708	MA165TA5	DIODE
D709	MTZJT-778.2C	DIODE
D710	MTZJT-7716C	DIODE
D801	RBV-608LF-B	DIODE
D803	1SR124-4AT82	DIODE
D804	1SR124-4AT82	DIODE
D805	TLP621GR-LF2	PHOTO COUPLER
D806	1SR124-4AT82	DIODE
D850	RU4BLF-L1	DIODE
D851	MTZJT776.2B	DIODE
D852	MA165TA5	DIODE
D853	MA2180BLFS	DIODE
D854	TVSRU3AMLFA5	DIODE
D855	D10SC6MRL	DIODE
D856	RU4AMLF-M1	DIODE
D857	MTZJT-775.1A	DIODE
D858	MA165TA5	DIODE
D859	MA165TA5	DIODE
D861	MA165TA5	DIODE
D862	MTZJT-7736A	DIODE
D863	MA165TA5	DIODE
D865	MA165TA5	DIODE
D866	MA165TA5	DIODE
D867	EK06-V0	DIODE
D868	1N4150T-77	DIODE
D869	1N4150T-77	DIODE
D870	MA165TA5	DIODE
D871	1N4150T-77	DIODE
D873	MTZJT-775.6C	DIODE
D874	1SR124-4AT82	DIODE
D875	BZX79A75A26A	DIODE
D890	MA165TA5	DIODE
D891	MA165TA5	DIODE
D901	1SS254T-77	DIODE
D902	1SS254T-77	DIODE
D903	1SS254T-77	DIODE
D910	R2KNLFA1	DIODE
D1071	SLR56UR3FS	LED
D1072	MTZJT-778.2C	DIODE
D1101	MA165TA5	DIODE
D2101	MA723TA5	DIODE
D2102	MA723TA5	DIODE
D2103	MA723TA5	DIODE
D2104	MA723TA5	DIODE
D2105	MTZJT-778.2C	DIODE
D2303	MA723TA5	DIODE
D2304	MA723TA5	DIODE
D3351	1SS254T-77	DIODE
D3352	MA165TA5	DIODE
D3353	MA165TA5	DIODE
D3354	MA165TA5	DIODE
TRANSISTORS		
Q101	BC847B	TRANSISTOR

Cct Ref	Parts Number	Description
Q102	BC847B	TRANSISTOR
Q104	BC847B	TRANSISTOR
Q105	BC847B	TRANSISTOR
Q251	2SD1328STX	TRANSISTOR
Q252	2SD1328STX	TRANSISTOR
Q253	BC847B	TRANSISTOR
Q254	BC847B	TRANSISTOR
Q351	2SA1767	TRANSISTOR
Q361	2SA1767	TRANSISTOR
Q371	2SA1767	TRANSISTOR
Q451	BC857B	TRANSISTOR
Q503	2SK2926TPE6	TRANSISTOR
Q551	2SC5144LB228	TRANSISTOR
Q552	2SC1473-RN	TRANSISTOR
Q601	BC847B	TRANSISTOR
Q701	BC857B	TRANSISTOR
Q702	BC847B	TRANSISTOR
Q850	2SD2396K-M3	TRANSISTOR
Q851	BC857B	TRANSISTOR
Q852	2SC1383-S	TRANSISTOR
Q853	BC847B	TRANSISTOR
Q854	BC847B	TRANSISTOR
Q855	BC847B	TRANSISTOR
Q856	BC847B	TRANSISTOR
Q857	2SA1018QTA	TRANSISTOR
Q905	BC847B	TRANSISTOR
Q906	BC847B	TRANSISTOR
Q907	BC857B	TRANSISTOR
Q908	2SA1535ARLB	TRANSISTOR
Q909	2SC3944ARLB	TRANSISTOR
Q1051	BC847B	TRANSISTOR
Q1052	BC847B	TRANSISTOR
Q1104	BC847B	TRANSISTOR
Q1105	BC847B	TRANSISTOR
Q1106	BC847B	TRANSISTOR
Q1107	BC847B	TRANSISTOR
Q1108	BC847B	TRANSISTOR
Q1501	BC847B	TRANSISTOR
Q1502	BC857B	TRANSISTOR
Q1503	BC847B	TRANSISTOR
Q1504	BC847B	TRANSISTOR
Q1505	BC857B	TRANSISTOR
Q1506	BC847B	TRANSISTOR
Q1507	BC847B	TRANSISTOR
Q1508	BC857B	TRANSISTOR
Q1509	BC847B	TRANSISTOR
Q1510	BC847B	TRANSISTOR
Q1511	BC857B	TRANSISTOR
Q1512	BC847B	TRANSISTOR
Q1513	BC847B	TRANSISTOR
Q2101	BC857B	TRANSISTOR
Q2102	BC857B	TRANSISTOR
Q2103	BC857B	TRANSISTOR
Q2301	BC847B	TRANSISTOR
Q2302	BC857B	TRANSISTOR
Q2303	BC847B	TRANSISTOR
Q2304	BC857B	TRANSISTOR
Q3006	BC847B	TRANSISTOR
Q3007	BC847B	TRANSISTOR
Q3352	BC857B	TRANSISTOR
TRANSFORMERS		
T501	ETH19Y193AY	TRANSFORMER
T801	ETS42AE296AD	TRANSFORMER
T802	ETP35KAN619U	TRANSFORMER
COILS		
L104	EXCELSA35T	COIL



Cct Ref	Parts Number	Description
L106	TLTACT100K	COIL
L107	TLTACT6R8K	COIL
L114	ELJFC2R2KF	COIL
L115	ELJFC2R2KF	COIL
L301	TLTACT4R7K	COIL
L353	TLT150K991R	COIL
L363	TLT100K991R	COIL
L373	TLT150K991R	COIL
L381	TLT220K991R	COIL
L451	EXCELSA35T	COIL
L501	EXCELSA35T	COIL
L581	ELHKL8026B	COIL
L582	ELC18B271E	COIL
L583	ELC18B150L	COIL
L584	ELHKL8025B	COIL
L586	EXCELD35C	COIL
L606	ELESN100KA	COIL
L701	ELC18B271E	COIL
L704	ELC10D332E	COIL
L705	EXCELD35V	COIL
L850	EXCELSA35T	COIL
L851	EXCELSA35T	COIL
L852	ELEIE470KA	COIL
L855	EXCELSA35T	COIL
L856	EXCELSA39V	COIL
L910	EXCELSA35T	COIL
L911	EXCELSA35T	COIL
L912	EXCELSA35T	COIL
L1103	TLTACT100K	COIL
L1104	EXCELSA35T	COIL
L1105	ELJFC2R2KF	COIL
L1501	ELESN2R2KA	COIL
L1502	ELESN2R2KA	COIL
L1503	ELESN2R2KA	COIL
L1504	ELESN2R2KA	COIL
L1505	ELESN100KA	COIL
L1506	ELESN100KA	COIL
L1507	ELESNR22KA	COIL
L1508	ELESNR22KA	COIL
L1509	ELESN100KA	COIL
L1510	ELESN100KA	COIL
L1514	ELESN100KA	COIL
L1515	ELESNR39KA	COIL
L1516	ELESN4R7KA	COIL
L1517	ELESN4R7KA	COIL
L1518	ELESN4R7KA	COIL
L1519	ELESNR39KA	COIL
L1520	ELESN2R2KA	COIL
L1521	ELESN1R0KA	COIL
L1522	ELESN2R2KA	COIL
L1523	ELESN2R2KA	COIL
L1524	ELESN2R2KA	COIL
L1525	ELESN100KA	COIL
L1526	ELESN100KA	COIL
L1527	ELESN100KA	COIL
L1528	ELESN100KA	COIL
L1529	ELESN100KA	COIL
L1530	EXCELD35V	COIL
L2101	TLTACT100K	COIL
L2103	EXCELSA35T	COIL
L2104	TLTACT4R7K	COIL
L3001	ELEMV1R5MA	COIL
L3002	ELEMV1R5MA	COIL
L3003	ELEMV1R5MA	COIL
L3004	ELEMV1R5MA	COIL

Cct Ref	Parts Number	Description
FILTERS		
L802	ELF18N012A	LINE FILTER
L804	ELF18N012A	LINE FILTER
CRYSTALS		
Q703	IRF644R	CRYSTAL
X1101	TSSA121	CRYSTAL
X1501	4730007267	CRYSTAL
X1502	4730007341	CRYSTAL
X2101	4730007158	CRYSTAL
RESISTORS		
C101	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C510	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA4	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA16	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA17	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA101	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA102	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA103	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA104	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA105	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA106	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA107	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA108	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA109	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA110	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA111	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA112	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA113	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA114	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA115	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA116	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA117	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA118	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA119	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA200	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA201	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA202	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE4	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω

Cct Ref	Parts Number	Description				
JSE43	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSE45	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSE46	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSE47	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSF1	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSF2	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSF3	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSY04	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
Q1101	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
R101	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R102	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R103	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R104	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R105	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R106	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	
R107	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R111	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R112	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R113	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R116	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R117	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R118	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R120	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R121	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R251	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R252	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R253	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R254	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R255	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R256	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R257	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47 Ω	
R258	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R259	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47 Ω	
R260	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R261	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R262	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R263	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R264	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R265	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω	
R266	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω	
R267	ERF7ZK4R7	WOUND	7W	10%	4R7 Ω	△
R268	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R269	ERQ14AJ101	METAL	0.25W	5%	100 Ω	△
R271	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R272	ERF7ZK4R7	WOUND	7W	10%	4R7 Ω	△
R350	ERQ12AJ151P	FUSIBLE	0.5W	5%	150 Ω	△
R352	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω	
R355	ERG1ANJ683	METAL	1W	5%	68K Ω	
R356	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R357	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R358	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R359	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
R360	ERO50PKF8251	METAL	0.5W	5%	8M2 Ω	△
R362	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω	
R365	ERG1ANJ683	METAL	1W	5%	68K Ω	
R366	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R367	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R368	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R369	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
R372	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω	
R375	ERG1ANJ683	METAL	1W	5%	68K Ω	
R376	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R377	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R378	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R379	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
R385	ERQ12HJ1R2	METAL	0.5W	5%	1R2 Ω	△

Cct Ref	Parts Number	Description				
R394	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R396	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R398	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R451	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R452	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R453	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R454	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R455	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R456	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R457	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R458	ERDS1TJ1R0	CARBON	0.5W	5%	1 Ω	
R459	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R460	ERG3SJS151	METAL	3W	5%	150 Ω	
R461	ERX2SJS1R2H	FUSIBLE	2W	5%	1R2 Ω	
R463	ERD25TJ222	CARBON	0.25W	5%	2K2 Ω	
R464	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	
R465	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R467	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R502	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R503	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R507	ERG2ANJ330	METAL	2W	5%	33 Ω	
R509	ERG1SJ222E	METAL	0.5W	5%	2K2 Ω	
R510	ERG1SJ222E	METAL	0.5W	5%	2K2 Ω	
R551	ERX3SJSR33	METAL	3W	5%	R33 Ω	
R555	ERQ12HKR82	FUSIBLE	0.5W	10%	R82 Ω	△
R558	ERDS1TJ124	CARBON	0.5W	5%	120K Ω	
R559	ERQ12HKR82	FUSIBLE	0.5W	10%	R82 Ω	△
R560	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω	
R561	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R563	ERJ6GEYJ824	S.M.CARB	0.1W	5%	820K Ω	
R564	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R566	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R567	ERF7ZK1R0	WOUND	7W	10%	1 Ω	△
R568	ERDS1TJ120	CARBON	0.5W	5%	12 Ω	
R581	ERQ2CJP821	METAL	2W	5%	820 Ω	△
R582	ERG3FJ471	METAL	3W	5%	470 Ω	△
R583	ERG3FJ331	METAL	3W	5%	330 Ω	△
R603	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R604	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R605	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R606	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R607	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R608	ERJ6GEYJ201	S.M.CARB	0.1W	5%	200 Ω	
R609	ERJ6GEYJ201	S.M.CARB	0.1W	5%	200 Ω	
R610	ERJ6GEYJ242	S.M.CARB	0.1W	5%	2K4 Ω	
R611	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R612	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R620	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R622	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R647	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R648	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R650	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R701	ERQ12AJ330P	METAL	0.5W	5%	330 Ω	△
R702	ERX2SJ2R7	FUSIBLE	2W	5%	2R7 Ω	
R703	ERG2FJ821	METAL	2W	5%	820 Ω	△
R704	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R705	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R706	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R707	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω	
R708	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R709	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R710	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R711	ERG1SJ101	METAL	1W	5%	100 Ω	
R712	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R714	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R715	ERD25TJ272	CARBON	0.25W	5%	2K7 Ω	

Cct Ref	Parts Number	Description				
R716	ERQ12AJ680P	METAL	0.5W	5%	68 Ω	△
R718	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R719	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω	
R720	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M Ω	
R721	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R801	ERC12ZGK335D	SOLID	0.5W	10%	3M3 Ω	
R805	ERD25TJ473	CARBON	0.25W	5%	47K Ω	
R806	ERD25TJ100	CARBON	0.25W	5%	10 Ω	
R807	ERD25TJ332	CARBON	0.25W	5%	3K3 Ω	
R809	ERD25TJ681	CARBON	0.25W	5%	680 Ω	
R810	ERW2PKR27	WOUND	2W	10%	R27 Ω	△
R811	ERW2PKR27	WOUND	2W	10%	R27 Ω	△
R812	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω	△
R813	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω	△
R814	ERD25TJ473	CARBON	0.25W	5%	47K Ω	
R815	ERD25TJ222	CARBON	0.25W	5%	2K2 Ω	
R850	ERD25TJ122	CARBON	0.25W	5%	1K2 Ω	
R852	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R853	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	
R854	ERG2FJ223	METAL	2W	5%	22K Ω	△
R855	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω	
R857	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω	
R858	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω	
R859	ERJ6GEYJ753	S.M.CARB	0.1W	5%	75K Ω	
R860	ERQ1CJP2R2	FUSIBLE	1W	10%	2R2 Ω	△
R861	ERD25TJ221	CARBON	0.25W	5%	220 Ω	
R862	ERD25TJ272	CARBON	0.25W	5%	2K7 Ω	
R863	ERDS1TJ560	CARBON	0.5W	5%	56 Ω	
R864	ERDS1TJ151	CARBON	0.5W	5%	150 Ω	
R865	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R867	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R868	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R869	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R870	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R871	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω	
R872	ERG1SJ183	METAL	1W	5%	18K Ω	
R873	ERG1SJ223	METAL	1W	5%	22K Ω	
R874	ERD25TJ104	CARBON	0.25W	5%	100K Ω	
R876	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R877	ERW2PKR47	WOUND	2W	10%	R47 Ω	△
R878	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R879	ERG3FJ680H	METAL	3W	5%	68 Ω	△
R880	ERG5FJ120H	METAL	5W	5%	12 Ω	△
R890	ERX1FJ3R9P	FUSIBLE	1W	5%	3R9 Ω	△
R913	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R914	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R915	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω	
R916	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω	
R917	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120 Ω	
R918	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R919	ERQ14AJW390	FUSIBLE	0.25W	5%	39 Ω	△
R920	ERQ14AJW390	FUSIBLE	0.25W	5%	39 Ω	△
R922	ERD25TJ683	CARBON	0.25W	5%	68K Ω	
R923	ERD25TJ683	CARBON	0.25W	5%	68K Ω	
R924	ERDS1FYJ390	CARBON	0.5W	5%	39 Ω	△
R925	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R926	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R927	ERD25TJ122	CARBON	0.25W	5%	1K2 Ω	
R928	ERD25TJ5R6	CARBON	0.25W	5%	5R6 Ω	
R929	ERDS1FVJ471	RESISTOR	0.5W	5%	470 Ω	△
R931	ERDS1FYJ390	CARBON	0.5W	5%	39 Ω	△
R935	ERQ14AJW3R9	FUSIBLE	0.25W	5%	3R9 Ω	△
R936	ERQ1CJP102	FUSIBLE	1W	5%	1K Ω	△
R937	ERQ14AJW100	FUSIBLE	0.25W	5%	10 Ω	△
R938	ERD25TJ122	CARBON	0.25W	5%	1K2 Ω	
R941	ERD25TJ5R6	CARBON	0.25W	5%	5R6 Ω	

Cct Ref	Parts Number	Description				
R1051	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R1052	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R1053	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1054	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R1071	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R1101	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1102	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R1103	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R1104	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R1105	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1106	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R1107	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R1108	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R1109	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1110	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1111	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1112	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R1113	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1115	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R1116	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1117	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1118	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1119	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1120	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1121	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1123	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1125	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1126	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1127	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1128	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	
R1129	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	
R1130	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1131	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1132	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1133	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R1136	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R1137	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R1138	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M Ω	
R1139	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R1140	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R1141	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R1145	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1146	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1147	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1148	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1149	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R1151	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1152	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1156	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R1157	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1158	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R1159	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R1160	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R1161	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1162	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R1163	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R1164	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R1165	ERJ6GEYJ512	S.M.CARB	0.1W	5%	5K1 Ω	
R1166	ERJ6GEYJ912	S.M.CARB	0.1W	5%	9K1 Ω	
R1167	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω	
R1168	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R1169	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R1170	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R1171	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω	
R1172	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R1173	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	

Cct Ref	Parts Number	Description			
R1174	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1175	ERJ6GEYJ225	S.M.CARB	0.1W	5%	2M2 Ω
R1178	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1501	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1502	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1504	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1505	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1506	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1507	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1508	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1509	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1510	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1511	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1512	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1513	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1514	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1515	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R1517	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1521	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1522	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R1523	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1524	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1525	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1526	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R1527	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω
R1528	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1529	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω
R1530	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1531	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1532	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R1533	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω
R1534	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1535	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1536	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R1537	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R1538	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1539	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R1540	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R1541	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1542	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R1543	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1544	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1545	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1546	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1547	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1548	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1549	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1550	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1551	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1552	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1553	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1554	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1555	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1556	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1557	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1558	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1559	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1560	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1561	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1562	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1563	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1564	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1565	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1566	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1567	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1568	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω

Cct Ref	Parts Number	Description			
R1569	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1570	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1571	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1572	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1573	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1574	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R1575	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1577	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1578	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1579	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1580	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1584	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R1585	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R1586	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2101	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2102	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2103	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2109	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2110	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2111	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R2112	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2113	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2114	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2115	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2116	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2117	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2118	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2119	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2120	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2302	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2303	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2304	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2305	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2306	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2308	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2309	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2310	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2311	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2312	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3001	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3002	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R3003	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3004	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3005	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3006	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R3007	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3008	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3010	ERD25TJ750	CARBON	0.25W	5%	75 Ω
R3013	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3014	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R3015	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3016	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3017	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3018	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R3019	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3020	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3021	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3046	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3047	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3048	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3049	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3050	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3057	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3355	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R3356	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω

Cct Ref	Parts Number	Description				
R3357	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	
R3358	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	
R3360	ERDS1TJ471	CARBON	0.5W	5%	470 Ω	
R3361	ERO50PKF1133	METAL	0.5W	5%	110K Ω	△
R3362	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R3363	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R3364	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R3601	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3602	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3603	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
RL801	TSE1885-1	RELAY			Ω	
CAPACITORS						
C102	ECUV1H103ZFX	S.M. CAP	50V		10nF	
C103	ECJ2VF1H104Z	ELECT	350V		100nF	
C106	ECUV1H560JCX	S.M. CAP	50V		56pF	
C107	ECJ2VF1H104Z	ELECT	350V		100nF	
C108	ECA1CM100GB	ELECT	16V		10μF	
C109	ECUV1H102JCX	S.M. CAP	50V		1nF	
C110	ECUV1H103ZFX	S.M. CAP	50V		10nF	
C111	ECA1HMR33GB	ELECT	50V		0.33μF	
C117	ECUV1H103ZFX	S.M. CAP	50V		10nF	
C118	ECJ2VF1H104Z	ELECT	350V		100nF	
C119	ECA1CM102B	ELECT	16V		1000μF	
C120	ECA1CM221GB	ELECT	16V		220μF	
C121	ECUV1H561KBX	S.M. CAP	50V		560pF	
C122	ECUV1H102KBX	S.M. CAP	50V		1nF	
C123	ECUV1H102KBX	S.M. CAP	50V		1nF	
C124	ECUV1H220JCX	S.M. CAP	50V		22pF	
C125	ECUV1H100DCX	S.M. CAP	50V		10pF	
C251	ECA1EM330B	ELECT	25V		33μF	
C252	ECUV1H472KBX	S.M. CAP	50V		4.7nF	
C253	ECA1HM4R7GB	ELECT	50V		4.7μF	
C254	ECQM1H684J	FILM	50V		680nF	
C255	ECA1EM101GB	ELECT	25V		100μF	
C256	ECUV1H472KBX	S.M. CAP	50V		4.7nF	
C257	ECA1HM4R7GB	ELECT	50V		4.7μF	
C258	ECA1EM330B	ELECT	25V		33μF	
C259	ECQM1H684J	FILM	50V		680nF	
C260	ECA1VM102GB	ELECT	35V		1nF	
C261	ECA1VM102GB	ELECT	35V		1nF	
C262	ECQM1H334J	FILM	50V		330nF	
C263	ECA1HM010GB	ELECT	50V		1μF	
C264	ECA1HHG222E	ELECT	50V		2200μF	
C265	ECQM1H334J	FILM	50V		330nF	
C266	ECA1HM010GB	ELECT	50V		1μF	
C267	ECJ2VB1H104K	ELECT	350V		100nF	
C268	ECJ2VB1H104K	ELECT	350V		100nF	
C270	ECJ2VB1H104K	ELECT	350V		100nF	
C352	ECUV1H224ZFX	S.M. CAP	50V		220nF	
C353	ECUV1H104KBX	S.M. CAP	50V		100nF	
C354	ECQM2104KZ	FILM	250V		100nF	
C355	ECKC2H102J	CERAMIC	500V		1nF	△
C358	ECUV1H222JCX	S.M. CAP	50V		2.2nF	
C362	ECUV1H224ZFX	S.M. CAP	50V		220nF	
C363	ECUV1H104KBX	S.M. CAP	50V		100nF	
C364	ECQM2104KZ	FILM	250V		100nF	
C365	ECKC2H102J	CERAMIC	500V		1nF	△
C368	ECUV1H222JCX	S.M. CAP	50V		2.2nF	
C369	ECUV1H220JCX	S.M. CAP	50V		22pF	
C372	ECUV1H224ZFX	S.M. CAP	50V		220nF	
C373	ECUV1H104KBX	S.M. CAP	50V		100nF	
C374	ECQM2104KZ	FILM	250V		100nF	
C375	ECKC2H102J	CERAMIC	500V		1nF	△
C378	ECUV1H222JCX	S.M. CAP	50V		2.2nF	
C381	ECA1HM101GB	ELECT	50V		100μF	
C382	ECA1CM471GB	ELECT	16V		470μF	

Cct Ref	Parts Number	Description				
C383	ECUV1H103KBX	S.M. CAP	50V		10nF	
C384	ECQM2104KZ	FILM	250V		100nF	
C385	ECA2EM220B	ELECT	250V		22μF	
C386	ECKC3D152J	CERAMIC	2KV		1.5nF	△
C395	ECQM1H104J	FILM	50V		100nF	
C396	ECJ2VF1H104Z	ELECT	350V		100nF	
C451	ECUV1H102JX	S.M. CAP	50V		1nF	
C453	ECUV1H152KBX	S.M. CAP	50V		1.5pF	
C454	ECQV1H105JZ	FILM	50V		1μF	
C455	ECA1HM100GB	ELECT	50V		10μF	
C456	ECA1HHG221B	ELECT	50V		220μF	
C459	ECQB1224KFW	FILM	100V		220nF	
C463	ECEA1HU221	ELECT	50V		220μF	
C509	ECA1VM470B	ELECT	35V		47μF	
C511	ECQM2683JZ	FILM	250V		68nF	
C551	ECKC3D681J	CERAMIC	2KV		680pF	△
C552	ECWH15H102JN	FILM	1500V		1nF	
C557	ECKC2H471J	CERAMIC	500V		470pF	△
C558	ECA1HHG471E	ELECT	50V		470μF	
C561	ECA1EHG102B	ELECT	25V		1000μF	
C562	ECKC2H101J	CERAMIC	500V		100pF	△
C563	ECA2EHG220B	ELECT	250V		20μF	
C564	ECEA2AU2R2	ELECT	100V		2.2μF	
C565	ECQP1H273J	FILM	100V		2700μF	
C566	ECKC2H471J	CERAMIC	500V		470pF	△
C567	ECA1EHG102B	ELECT	25V		1000μF	
C568	ECKC2H471J	CERAMIC	500V		470pF	△
C569	ECKC2H102J	CERAMIC	500V		1nF	△
C581	ECWF4684JBB	FILM	400V		680nF	
C582	ECWF4684JBB	FILM	400V		680nF	
C583	ECWH20562JVB	FILM	200V		5.6nF	
C584	ECWH20562JVB	FILM	200V		5.6nF	
C586	ECQF4123JZH	FILM	400V		12nF	△
C587	ECQM4223KC	FILM	400V		220nF	
C608	ECUV1H103KBX	S.M. CAP	50V		10nF	
C609	ECUV1H270JCX	S.M. CAP	50V		27pF	
C623	ECUV1H121JCX	S.M. CAP	50V		120pF	
C624	ECUV1H121JCX	S.M. CAP	50V		120pF	
C625	ECQM1H224J	FILM	50V		220nF	
C626	ECA1CM100GB	ELECT	16V		10μF	
C627	ECUV1C104KBX	S.M. CAP	16V		100nF	
C628	ECQM1H224J	FILM	50V		220nF	
C701	ECA1HHG101B	ELECT	50V		100μF	
C702	ECUV1H103KBX	S.M. CAP	50V		10nF	
C703	ECEA1HGE100	ELECT	50V		10μF	
C704	ECUV1H223KBX	S.M. CAP	50V		22nF	
C705	ECQB1H102J	FILM	50V		1nF	
C709	ECQV1H105JZ	FILM	50V		1μF	
C801	ECQE2A474MWB	FILM	250V		470nF	
C804	222233510224	FILM	250V		220nF	
C806	ECKWNA101MBC	CERAMIC	400V		100μF	
C807	ECKC2H472J	CERAMIC	500V		4.7nF	△
C808	ECKC2H472J	CERAMIC	500V		4.7nF	△
C809	ECKC2H472J	CERAMIC	500V		4.7nF	△
C810	ECKC2H472J	CERAMIC	500V		4.7nF	△
C811	ECOS2GA221CA	ELECT	400V		220μF	
C814	ECKC3D102J	CERAMIC	2KV		1nF	△
C815	ECKC1H471J	CERAMIC	50V		470pF	
C816	ECA1EM101GB	ELECT	25V		100μF	
C817	ECQE6104K	FILM	600V		100nF	△
C818	ECKCNS332J	CERAMIC	1.2KV		3.3nF	△
C819	ECQB1H152K	FILM	50V		1.5nF	
C820	ECJ2VF1H104Z	ELECT	350V		100nF	
C839	ECA1CM100GB	ELECT	16V		10μF	
C840	ECUV1H104KBX	S.M. CAP	50V		100nF	
C841	ECA1AM222B	ELECT	10V		2200μF	

Cct Ref	Parts Number	Description			
C850	ECKC3D471JB	CERAMIC	2KV	470pF	△
C851	ECA2CHG221E	ELECT	160V	220μF	
C852	ECA2CHG101E	ELECT	160V	100μF	
C853	ECKC2H471J	CERAMIC	500V	470pF	△
C854	ECA1EM102GB	ELECT	25V	100μF	
C855	ECKC2H471J	CERAMIC	500V	470pF	△
C856	ECA1AHG332B	ELECT	10V	3.3nF	
C857	ECKC2H471J	CERAMIC	500V	470pF	△
C858	ECEA1HGE102	ELECT	50V	1000μF	
C859	ECJ2VF1H104Z	ELECT	350V	100nF	
C860	ECA1HM101GB	ELECT	50V	100μF	
C862	ECJ2VF1H104Z	ELECT	350V	100nF	
C863	ECA1HM101GB	ELECT	50V	100μF	
C866	ECJ2VF1H104Z	ELECT	350V	100nF	
C867	ECA1CM100GB	ELECT	16V	10μF	
C868	ECA1CM100GB	ELECT	16V	10μF	
C869	ECA1EM101GB	ELECT	25V	100μF	
C870	ECA1EM471GB	ELECT	25V	470μF	
C871	ECA1CM102B	ELECT	16V	1000μF	
C872	ECA1CM471GB	ELECT	16V	470μF	
C873	ECA1CM100GB	ELECT	16V	10μF	
C875	ECA2CM4R7B	ELECT	160V	10μF	
C876	ECA1AHG331E	ELECT	10V	330μF	
C902	ECA1VM101GB	ELECT	35V	100μF	
C904	ECJ2VF1H103Z	ELECT	350V	10nF	
C906	ECUV1H680JCX	S.M. CAP	50V	68pF	
C907	ECUV1H121JCX	S.M. CAP	50V	120pF	
C908	ECUV1H151JCX	S.M. CAP	50V	150pF	
C909	ECKC2H472J	CERAMIC	500V	4.7nF	△
C910	ECKC2H472J	CERAMIC	500V	4.7nF	△
C911	ECUV1H151JCX	S.M. CAP	50V	150pF	
C912	ECA2EM220B	ELECT	250V	22μF	
C913	ECA1HM101GB	ELECT	50V	100μF	
C914	ECA1HM101GB	ELECT	50V	100μF	
C916	ECA2EM220B	ELECT	250V	22μF	
C917	ECA1HM100GB	ELECT	50V	10μF	
C918	ECJ2VF1H103Z	ELECT	350V	10nF	
C919	ECCR2H270J	CERAMIC	500V	27pF	
C1071	ECUV1H331JCX	S.M. CAP	50V	330pF	
C1072	ECUV1H103KBX	S.M. CAP	50V	10nF	
C1073	ECA1HM101GB	ELECT	50V	100μF	
C1101	ECJ2VF1H104Z	ELECT	350V	100nF	
C1102	ECA0JM101G	ELECT	6.3V	100μF	
C1103	ECUV1H220JCX	S.M. CAP	50V	22pF	
C1104	ECUV1H220JCX	S.M. CAP	50V	22pF	
C1105	ECUV1H101JCX	S.M. CAP	50V	100pF	
C1108	ECJ2VB1H333K	ELECT	350V	33nF	
C1111	ECA1CM100GB	ELECT	16V	10μF	
C1112	ECUV1H103KBX	S.M. CAP	50V	10nF	
C1115	ECJ3VB1C474K	ELECT	3.5KV	470nF	
C1116	ECUV1H472KBX	S.M. CAP	50V	4.7nF	
C1117	ECJ2VF1H104Z	ELECT	350V	100nF	
C1118	ECUV1H103KBX	S.M. CAP	50V	10nF	
C1119	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1120	ECJ2VF1H104Z	ELECT	350V	100nF	
C1121	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1123	ECUV1H471JCX	S.M. CAP	50V	470pF	
C1124	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1125	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1126	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1127	ECUV1H561JCX	S.M. CAP	50V	560pF	
C1129	ECUV1H270JCX	S.M. CAP	50V	27pF	
C1501	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1502	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1503	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1504	ECUV1H271JCX	S.M. CAP	50V	270pF	

Cct Ref	Parts Number	Description			
C1505	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1506	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1507	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1508	ECUV1H271JCX	S.M. CAP	50V	270pF	
C1509	ECQM1H684J	FILM	50V	680nF	
C1510	ECQM1H684J	FILM	50V	680nF	
C1511	ECQM1H684J	FILM	50V	680nF	
C1512	ECQM1H684J	FILM	50V	680nF	
C1513	ECUV1H102JCX	S.M. CAP	50V	1nF	
C1514	ECEA1CKA100	ELECT	16V	10μF	
C1515	ECJ2VB1H103K	ELECT	350V	10nF	
C1516	ECEA1CKA101	ELECT	16V	100μF	
C1517	ECJ2YB1H473K	ELECT	350V	47nF	
C1518	ECEA1CKA100	ELECT	16V	10μF	
C1519	ECUV1H050CCX	S.M. CAP	50V	50pF	
C1520	ECUV1H050CCX	S.M. CAP	50V	50pF	
C1521	ECJ2VB1H103K	ELECT	350V	10nF	
C1522	ECEA1CKA100	ELECT	16V	10μF	
C1523	ECJ2VB1H103K	ELECT	350V	10nF	
C1524	ECEA1CKA100	ELECT	16V	10μF	
C1525	ECJ2VB1H103K	ELECT	350V	10nF	
C1526	ECEA1CKA100	ELECT	16V	10μF	
C1527	ECJ2VB1C104K	ELECT	350V	100nF	
C1528	ECEA1CKA100	ELECT	16V	10μF	
C1529	ECJ2VB1C104K	ELECT	350V	100nF	
C1530	ECEA1CKA100	ELECT	16V	10μF	
C1531	ECJ2VB1C104K	ELECT	350V	100nF	
C1532	ECEA1CKA100	ELECT	16V	10μF	
C1540	ECUV1H222JCX	S.M. CAP	50V	2.2nF	
C1541	ECJ2VB1H333K	ELECT	350V	33nF	
C1542	ECJ2VB1H333K	ELECT	350V	33nF	
C1543	ECJ2VB1C224K	ELECT	350V	220nF	
C1544	ECJ2VB1H333K	ELECT	350V	33nF	
C1545	ECEA1CKA100	ELECT	16V	10μF	
C1546	ECEA1CKA100	ELECT	16V	10μF	
C1547	ECJ2VB1H103K	ELECT	350V	10nF	
C1548	ECJ2VB1H103K	ELECT	350V	10nF	
C1549	ECJ2VB1H103K	ELECT	350V	10nF	
C1550	ECJ2VB1H103K	ELECT	350V	10nF	
C1551	ECUV1H103KBX	S.M. CAP	50V	10nF	
C1552	ECUV1H103KBX	S.M. CAP	50V	10nF	
C1553	ECEA1CKA100	ELECT	16V	10μF	
C1554	ECJ2VB1H103K	ELECT	350V	10nF	
C1555	ECJ2VB1C104K	ELECT	350V	100nF	
C1556	ECUV1H270JCX	S.M. CAP	50V	27pF	
C1557	ECUV1H270JCX	S.M. CAP	50V	27pF	
C1558	ECJ2VB1H103K	ELECT	350V	10nF	
C1559	ECEA1CKA100	ELECT	16V	10μF	
C1560	ECEA1CKA100	ELECT	16V	10μF	
C1561	ECJ2VB1C104K	ELECT	350V	100nF	
C1562	ECJ2VB1C104K	ELECT	350V	100nF	
C1563	ECJ2VB1C104K	ELECT	350V	100nF	
C1564	ECJ2VB1C104K	ELECT	350V	100nF	
C1566	ECUV1H270JCX	S.M. CAP	50V	27pF	
C1567	ECEA1CKA100	ELECT	16V	10μF	
C1568	ECJ2VB1H103K	ELECT	350V	10nF	
C1569	ECEA1CKA100	ELECT	16V	10μF	
C1570	ECJ2VB1H103K	ELECT	350V	10nF	
C1571	ECJ2VB1H103K	ELECT	350V	10nF	
C1572	ECEA1CKA100	ELECT	16V	10μF	
C1573	ECJ2VB1H103K	ELECT	350V	10nF	
C1574	ECEA1CKA100	ELECT	16V	10μF	
C1575	ECEA1CKA100	ELECT	16V	10μF	
C1576	ECJ2VB1H103K	ELECT	350V	10nF	
C1577	ECUV1H270JCX	S.M. CAP	50V	27pF	
C1578	ECJ2VB1H103K	ELECT	350V	10nF	

Cct Ref	Parts Number	Description		
C1579	ECJ2VB1H103K	ELECT	350V	10nF
C1580	ECJ2VB1H103K	ELECT	350V	10nF
C1581	ECJ2VB1C224K	ELECT	350V	220nF
C1582	ECJ2VB1C224K	ELECT	350V	220nF
C1583	ECJ2VB1C224K	ELECT	350V	220nF
C1584	ECJ2VB1C104K	ELECT	350V	100nF
C1585	ECEA1CKA100	ELECT	16V	10μF
C1586	ECJ2VB1H103K	ELECT	350V	10nF
C1587	ECEA1CKA100	ELECT	16V	10μF
C1588	ECEA1CKA100	ELECT	16V	10μF
C1589	ECJ2VB1H103K	ELECT	350V	10nF
C1590	ECJ2VB1H103K	ELECT	350V	10nF
C1591	ECEA1CKA100	ELECT	16V	10μF
C1592	ECUV1H271JCX	S.M. CAP	50V	270pF
C1594	ECUV1H271JCX	S.M. CAP	50V	270pF
C1596	ECUV1H271JCX	S.M. CAP	50V	270pF
C1598	ECUV1H330JCX	S.M. CAP	50V	33pF
C1603	ECKC1H271J	CERAMIC	50V	270pF
C2101	ECUV1H102JCX	S.M. CAP	50V	1nF
C2102	ECUV1H102JCX	S.M. CAP	50V	1nF
C2103	ECUV1H102JCX	S.M. CAP	50V	1nF
C2104	ECUV1H102JCX	S.M. CAP	50V	1nF
C2105	ECUV1H102JCX	S.M. CAP	50V	1nF
C2106	ECUV1H102JCX	S.M. CAP	50V	1nF
C2107	ECUV1H102JCX	S.M. CAP	50V	1nF
C2108	ECUV1H102JCX	S.M. CAP	50V	1nF
C2109	ECUV1H102JCX	S.M. CAP	50V	1nF
C2110	ECUV1H102JCX	S.M. CAP	50V	1nF
C2111	ECA1CM100GB	ELECT	16V	10μF
C2112	ECA1CM100GB	ELECT	16V	10μF
C2113	ECA1HM3R3GB	ELECT	50V	3.3μF
C2114	ECJ2VF1H104Z	ELECT	350V	100nF
C2117	ECUV1H221JCX	S.M. CAP	50V	220pF
C2118	ECUV1H221JCX	S.M. CAP	50V	220pF
C2119	ECUV1H221JCX	S.M. CAP	50V	220pF
C2120	ECUV1H221JCX	S.M. CAP	50V	220pF
C2121	ECA1CM100GB	ELECT	16V	10μF
C2122	ECJ2VF1H104Z	ELECT	350V	100nF
C2123	ECUV1H221JCX	S.M. CAP	50V	220pF
C2124	ECUV1H070DTX	S.M. CAP	50V	70pF
C2125	ECUV1H470JCX	S.M. CAP	50V	47pF
C2126	ECUV1H070DTX	S.M. CAP	50V	70pF
C2127	ECUV1H010CCX	S.M. CAP	50V	1pF
C2128	ECUV1H010CCX	S.M. CAP	50V	1pF
C2129	ECA1CM102B	ELECT	16V	1000μF
C2130	ECA1CM331B	ELECT	16V	330μF
C2134	ECUV1H103ZFX	S.M. CAP	50V	10nF
C2135	ECA1HM101GB	ELECT	50V	100μF
C2136	ECJ2VF1H104Z	ELECT	350V	100nF
C2137	ECA1CM100GB	ELECT	16V	10μF
C2138	ECUV1H471KBX	S.M. CAP	50V	470pF
C2139	ECUV1H221JCX	S.M. CAP	50V	220pF
C2140	ECA1HM101GB	ELECT	50V	100μF
C2141	ECUV1H152JCX	S.M. CAP	50V	1.5pF
C2301	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C2302	ECA1CM470GB	ELECT	16V	47μF
C2303	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C2304	ECA1CM470GB	ELECT	16V	47μF
C3001	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3002	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3003	ECA1CM470GB	ELECT	16V	47μF
C3005	ECUV1H561JCX	S.M. CAP	50V	560pF
C3006	ECJ3VB1C474K	ELECT	3.5KV	470nF
C3007	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3008	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3009	ECUV1H222JCX	S.M. CAP	50V	2.2nF

Cct Ref	Parts Number	Description		
C3010	ECA1CM470GB	ELECT	16V	47μF
C3012	ECUV1H561JCX	S.M. CAP	50V	560pF
C3013	ECJ3VB1C474K	ELECT	3.5KV	470nF
C3014	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3015	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3016	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3017	ECA1CM470GB	ELECT	16V	47μF
C3019	ECUV1H561JCX	S.M. CAP	50V	560pF
C3020	ECJ3VB1C474K	ELECT	3.5KV	470nF
C3021	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3022	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3023	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3024	ECA1CM470GB	ELECT	16V	47μF
C3026	ECUV1H561JCX	S.M. CAP	50V	560pF
C3027	ECJ3VB1C474K	ELECT	3.5KV	470nF
C3028	ECUV1H222JCX	S.M. CAP	50V	2.2nF
C3030	ECUV1H271JCX	S.M. CAP	50V	270pF
C3031	ECUV1H271JCX	S.M. CAP	50V	270pF
C3032	ECUV1H271JCX	S.M. CAP	50V	270pF
C3101	ECUV1H104KBX	S.M. CAP	50V	100nF
C3102	ECUV1E104KBX	S.M. CAP	25V	100nF
C3111	ECUV1H391JCX	S.M. CAP	50V	390pF
C3351	ECA1CM221GB	ELECT	16V	220μF
TERMINALS AND LINKS				
JK2301	JPJ841101320	RCA SOCKET		
JK3001	0350808500	SCART SOCKET		
SWITCHES				
S801	ESB92S11B	SWITCH		
S1201	EVQ21405R	SWITCH		
S1202	EVQ21405R	SWITCH		
S1203	EVQ21405R	SWITCH		
S1204	EVQ21405R	SWITCH		
S1205	EVQ21405R	SWITCH		



SCHEMATIC DIAGRAMS FOR MODEL TX-28SL20C (EURO-4H CHASSIS)

IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

NOTES

1. RESISTOR
All resistors are carbon 1/4W resistor, unless marked otherwise.
Unit of resistance is OHM (Ω) (k=1,000, M=1,000,000)
2. CAPACITORS
All capacitors are ceramic 50V unless marked otherwise.
Unit of capacitance is μ F unless otherwise stated.
3. COIL
Unit of inductance is μ H, unless otherwise stated.
4. Components marked "L" on the schematic diagram shows leadless parts.
5. TEST POINT
 Test Point Position
6. EARTH SYMBOL
 Chassis Earth (Cold)  Line Earth (Hot)
7. VOLTAGE MEASUREMENT
Voltage is measured by a d.c. voltmeter.
Measurement conditions are as follows:
Power source a.c. 220V-240V, 50Hz
Receiving Signal Colour Bar signal (RF)
All customer controls Maximum position
8.  Indicates the Video signal path
 Indicates the Audio signal path

These schematic diagrams are the latest at time of printing and are subject to change without notice.

REMARKS

1. The Power Supply Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits except the Power Circuit, are COLD. Take the following precautions :-
 - a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
 - b. Do not short circuit the hot and cold circuits as electrical components may be damaged.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.

ZEICHENERKLÄRUNG FÜR MODELL TX-28SL20C (EURO-4H CHASSIS)

WICHTIGER SICHERHEITSHINWEIS

Teile, die mit einem Hinweis  gekennzeichnet sind, sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.


ANMERKUNG

1. WIDERSTÄNDE
Alle 1/4W Widerstände sind Kohlewiderstände, Abweichungen sind folgt gekennzeichnet.
Die Maßeinheit ist OHM (Ω) (k=1,000, M=1,000,000)
2. KONDENSATOREN
Alle Kondensatoren sind Keramikausführungen. Spannungsfestigkeit 50V. Abweichungen sind wie folgt gekennzeichnet. Die Maßeinheit ist μ F, wenn keine anderen Bezeichnungen genannt sind.
3. SPULEN
Die Maßeinheit ist μ H, Abweichungen sind gekennzeichnet.
4. Mit "L" gekennzeichnete Teile sind ohne Anschlußdrähte.
5. TESTPUNKTE
 Kennzeichnung der Testpunktposition
6. MASSE SYMBOL
 Erdung am Chassis  Erdung an Masse-Leitung
7. SPANNUNGSMESSUNG
Spannungsmessungen sind mit einem d.c.-Voltmeter durchzuführen. Die Meßbedingungen sind folgende:
Netzspannung a.c. 220V-240V, 50Hz
Wiedergabe Signal Farbbalken-Testbild
Wiedergabesignal Farbbalken-Testbild (HF)
8.  Videosignalweg
 Audiosignalweg


Änderungen im Laufe der Fertigung sind möglich.

BEMERKUNGEN


1. Das Schaltnetzteil enthält Bereiche, die direkt mit dem Netz verbunden sind. Diese Bereiche sind im Schaltplan mit HOT gekennzeichnet. Alle anderen Schaltungen sind mit COLD gekennzeichnet und haben keine direkte Verbindung mit dem Netz :-
 - a. Weder die Leitungen im heißen noch Leitungen im heißen und im kalten Bereich gleichzeitig berühren. Es besteht die Gefahr eines elektrischen Schlages.
 - b. Keinesfalls die Leitungen im heißen Bereich mit denen im kalten Bereich verbinden oder kurzschliessen. Dies kann zur Zerstörung von Bauteilen oder Sicherungen führen. Außerdem ist die elektrische Betriebssicherheit des Gerätes nicht mehr gegeben.
 - c. Keine Messinstrumente gleichzeitig an Leitungen im heißen und kalten Bereich anschliessen. Sicherungen könnten zerstört werden. Die Erde des Messinstrumentes immer mit der des zu prüfenden Schaltkreises verbinden.
 - d. Vor Ausbau des Chassis, Stecker aus der Netzsteckdose ziehen.

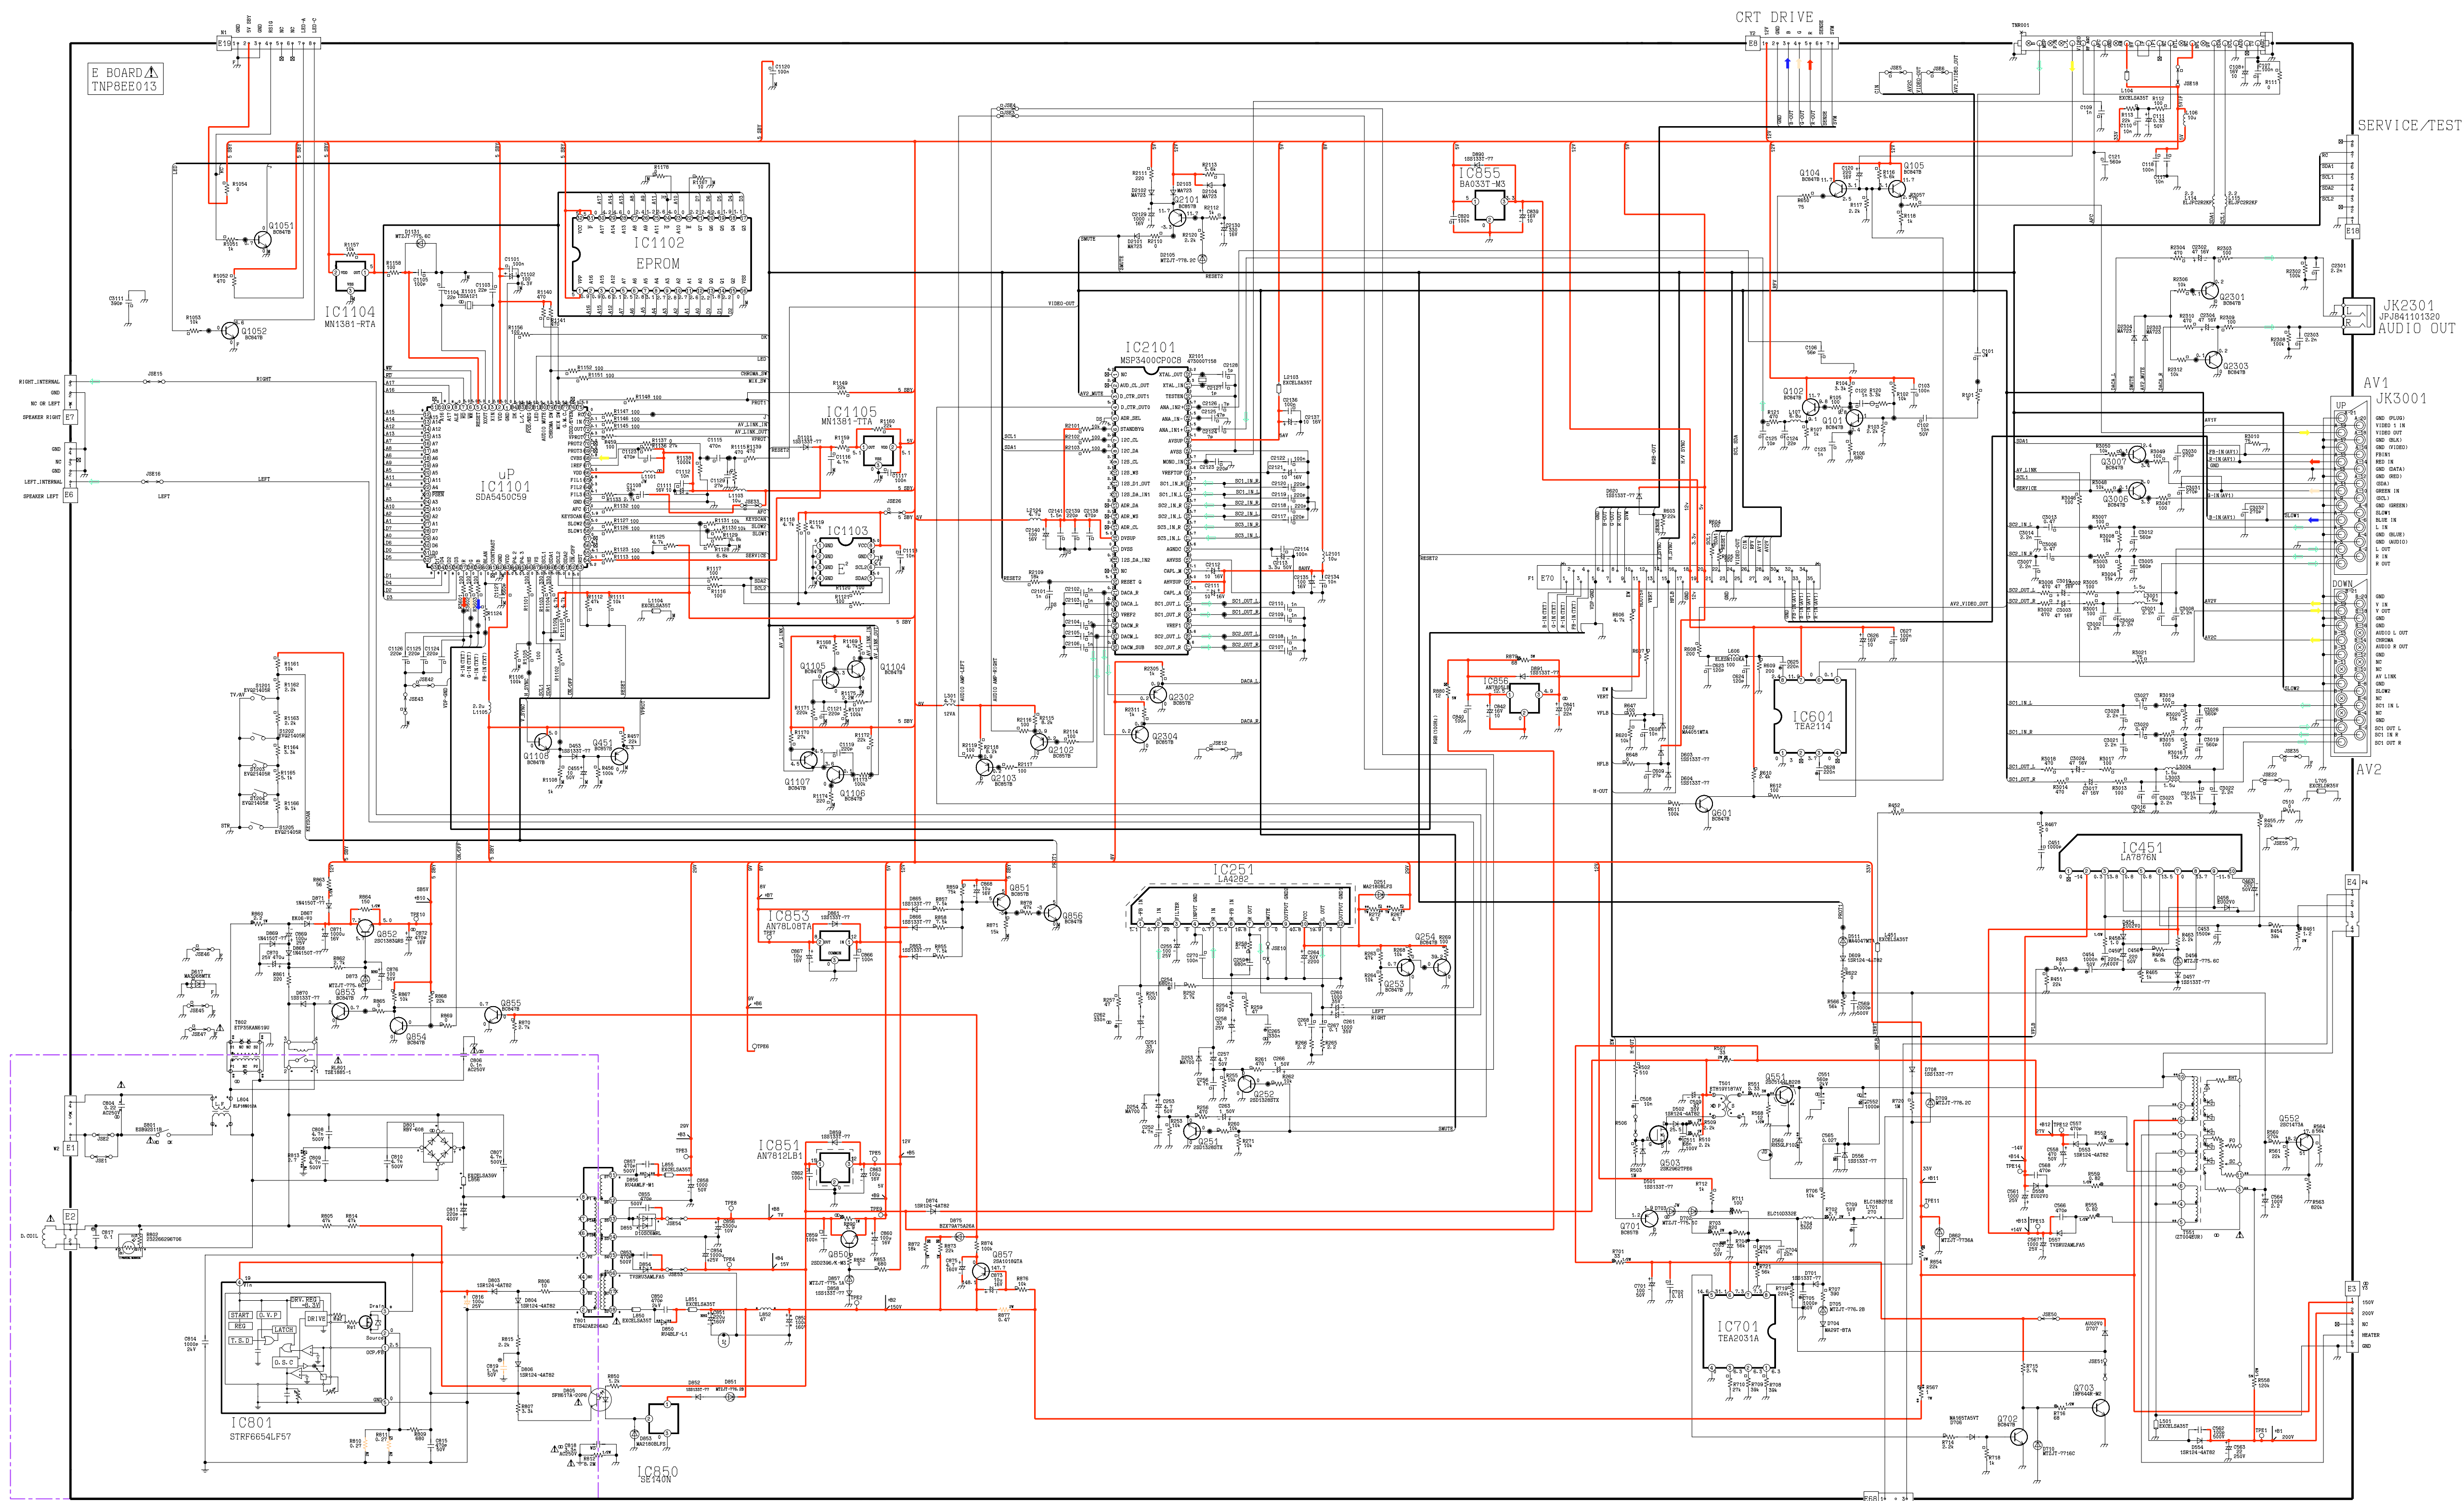

F BOARD
TNP8EF007

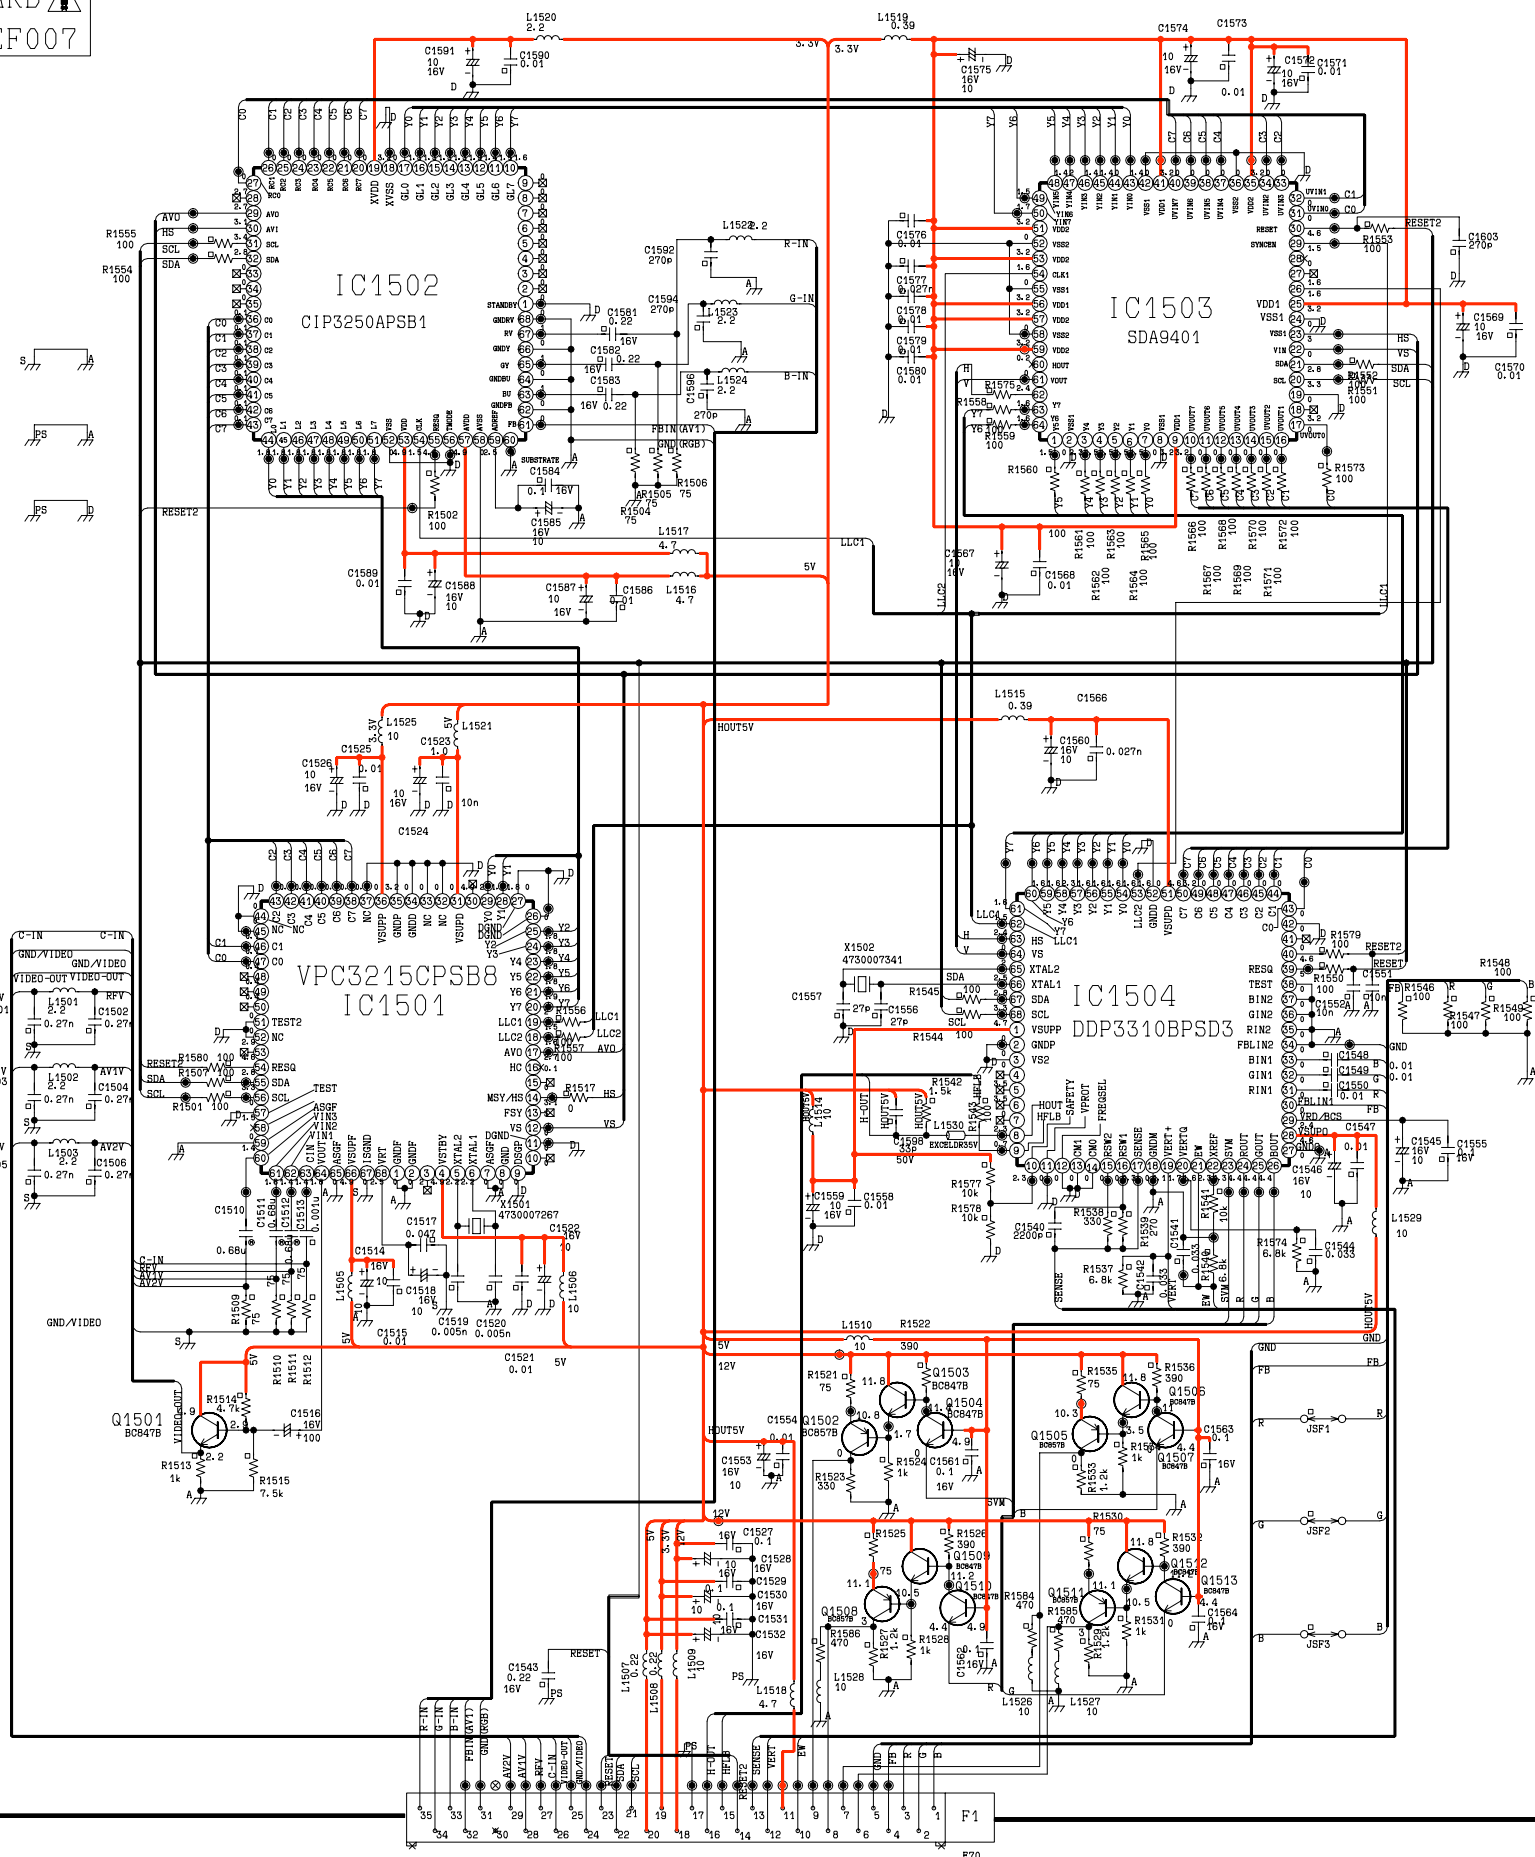

R-IN (AV1)
R-IN (AV2)
R-IN (AV3)
R-IN (AV4)
R-IN (AV5)
R-IN (AV6)
R-IN (AV7)
R-IN (AV8)
R-IN (AV9)
R-IN (AV10)
R-IN (AV11)
R-IN (AV12)
R-IN (AV13)
R-IN (AV14)
R-IN (AV15)
R-IN (AV16)
R-IN (AV17)
R-IN (AV18)
R-IN (AV19)
R-IN (AV20)
R-IN (AV21)
R-IN (AV22)
R-IN (AV23)
R-IN (AV24)
R-IN (AV25)
R-IN (AV26)
R-IN (AV27)
R-IN (AV28)
R-IN (AV29)
R-IN (AV30)
R-IN (AV31)
R-IN (AV32)
R-IN (AV33)
R-IN (AV34)
R-IN (AV35)
R-IN (AV36)
R-IN (AV37)
R-IN (AV38)
R-IN (AV39)
R-IN (AV40)
R-IN (AV41)
R-IN (AV42)
R-IN (AV43)
R-IN (AV44)
R-IN (AV45)
R-IN (AV46)
R-IN (AV47)
R-IN (AV48)
R-IN (AV49)
R-IN (AV50)
R-IN (AV51)
R-IN (AV52)
R-IN (AV53)
R-IN (AV54)
R-IN (AV55)
R-IN (AV56)
R-IN (AV57)
R-IN (AV58)
R-IN (AV59)
R-IN (AV60)
R-IN (AV61)
R-IN (AV62)
R-IN (AV63)
R-IN (AV64)
R-IN (AV65)
R-IN (AV66)
R-IN (AV67)
R-IN (AV68)
R-IN (AV69)
R-IN (AV70)
R-IN (AV71)
R-IN (AV72)
R-IN (AV73)
R-IN (AV74)
R-IN (AV75)
R-IN (AV76)
R-IN (AV77)
R-IN (AV78)
R-IN (AV79)
R-IN (AV80)
R-IN (AV81)
R-IN (AV82)
R-IN (AV83)
R-IN (AV84)
R-IN (AV85)
R-IN (AV86)
R-IN (AV87)
R-IN (AV88)
R-IN (AV89)
R-IN (AV90)
R-IN (AV91)
R-IN (AV92)
R-IN (AV93)
R-IN (AV94)
R-IN (AV95)
R-IN (AV96)
R-IN (AV97)
R-IN (AV98)
R-IN (AV99)
R-IN (AV100)

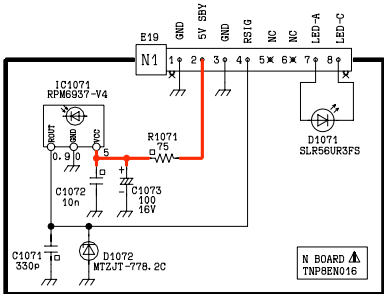

P BOARD ⚠
TNP8EP017

