

CONTENTS

SPECIFICATIONS	2	ADJUSTMENT	9
PRECAUTIONS	3	TROUBLESHOOTING GUIDE	10
TIMING CHART	4	PRINTED CIRCUIT BOARD.....	14
OPERATING INSTRUCTIONS	5	EXPLODED VIEW.....	15
WIRING DIAGRAM	6	REPLACEMENT PARTS LIST	17
BLOCK DIAGRAM	7	PIN CONFIGURATION.....	20
DESCRIPTION OF BLOCK DIAGRAM	8	SCHEMATIC DIAGRAM	22

SPECIFICATIONS

1. LCD CHARACTERISTICS

Type : TFT XGA LCD Module
Size : 352.0(H) x 263.5(V) x 14.0(T)
Pixel Pitch : 0.297mm x 0.297mm
Color Depth : 6bits(with FRC)/ 16M colors
Active Video Area : 15.0inch
(304.128 x 228.096)
Surface Treatment : Anti-Glare, Hard Coating (3H)
Backlight Unit : Top/Bottom edge side 2CCFL
Electrical Interface : LVDS interface

2. OPTICAL CHARACTERISTICS

2-1. Viewing Angle by Contrast Ratio ≥ 10
Left : 55° min. Right : 55° min.
Top : 40° min. Bottom : 40° min.

2-2. Luminance
: 200(min.), 250(typ.) at Center point

2-3. Contrast Ratio :250(min.), 350(typ.)

3. SIGNAL (Refer to the Timing Chart)

3-1. Sync Signal
1) Type : Separate Sync. (Horizontal & Vertical)
2) Input Voltage Level : Low=0~0.8V, High=2.1~5.5V
3) Sync Polarity : Positive or Negative

3-2. Video Input Signal
1) Type : R, G, B Analog
2) Voltage Level : 0~0.714 V
a) Color 0, 0 : 0 Vp-p
b) Color 7, 0 : 0.467 Vp-p
c) Color 15, 0 : 0.714 Vp-p
3) Input Impedance : 75 Ω

3-3. Operating Frequency
Horizontal : 30 ~ 63kHz
Vertical : 56 ~ 75Hz

4. POWER SUPPLY

4-1. Power
100~240V, 50/60Hz 0.6A

4-2. Power Consumption

MODE	H/V SYNC	VIDEO	POWER CONSUMPTION	LED COLOR
POWER ON (MAX)	ON/ON	ACTIVE	less than 30 W	GREEN
POWER ON (NORMAL)	ON/ON	ACTIVE	less than 28 W	GREEN
STAND-BY	OFF/ON	OFF	less than 3 W	AMBER
SUSPEND	ON/OFF	OFF	less than 3 W	AMBER
DPMS OFF	-	-	less than 3 W	AMBER

5. ENVIRONMENT

5-1. Operating Temperature: 10°C~35°C (50°F~95°F)
(Ambient)
5-2. Relative Humidity : 10%~80%
(Non-condensing)
5-3. MTBF : 50,000 Hours (Min.)
Lamp Life : 30,000 Hours (Min.)


6. DIMENSIONS (with TILT/SWIVEL)

Width : 356mm (14.01")
Depth : 151.7mm (5.97")
Height : 359.8mm (14.16")

7. WEIGHT (with TILT/SWIVEL)

Net. Weight : 4.0kg (8.82 lbs)
Gross Weight : 5.5kg (12.13 lbs)

BLOCK DIAGRAM

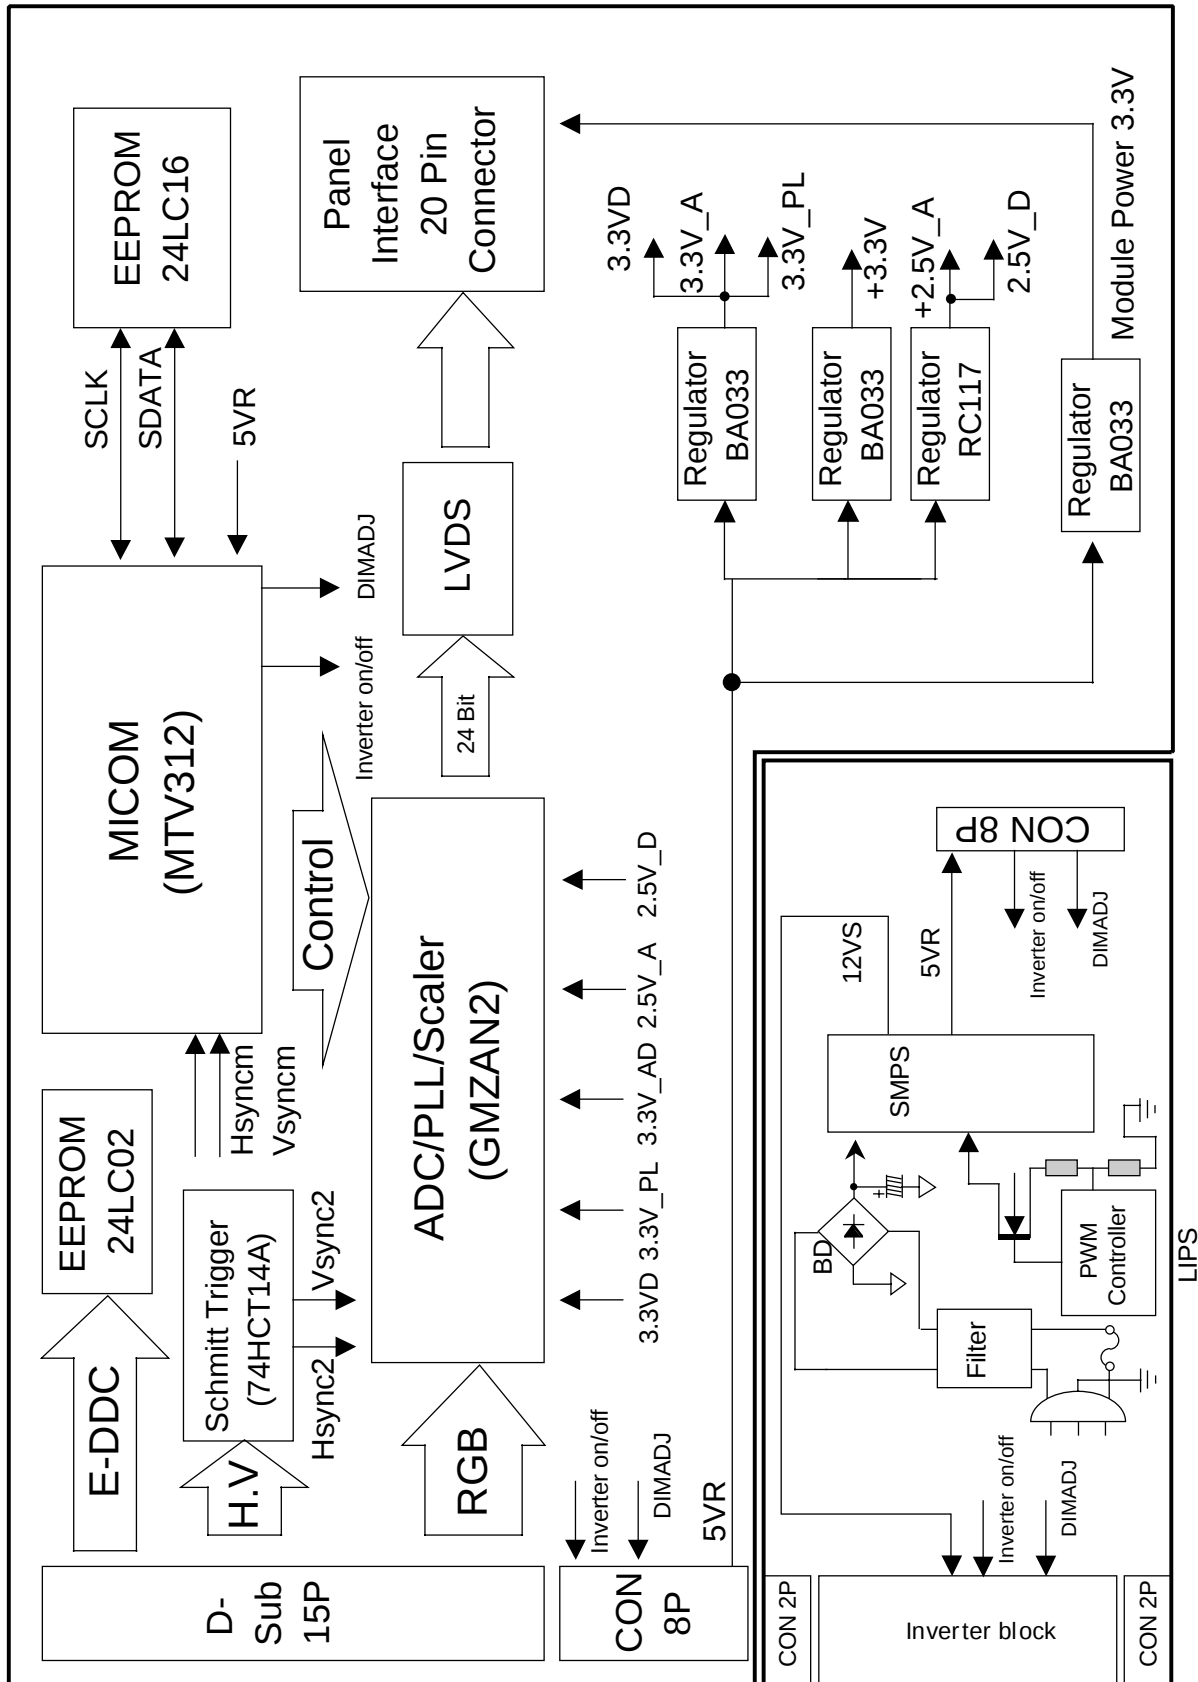

DESCRIPTION OF BLOCK DIAGRAM

1. Scaler One chip IC(GMZAN-2, U201)

GMZAN-2 (U201) is one chip IC which it supports four internal function blocks of Video Amp, PLL, A/D converter and Video processor.

Video signal (0.7Vp.p) clamped through C207, 208, 209 with matching IC's proper cut off voltage.

This signal is processed as a proper 8 bit digital signal by U201's amplifying, phase locking, A/D converting, and scaling operations.

U201 outputs 24bit RGB data and control signals(Clock, Horizontal and Vertical sync, and Data Enable) as LVDS IC's input signals.

2. System Controller (Microprocessor) Circuit

1) Microprocessor (U501) distinguishes polarity and frequency by calculating horizontal and vertical sync input from signal source.

2) Microprocessor (U501) carries out power control by sending power-down trigger signal to each IC.

3) Microprocessor (U501) communicates with EEPROM (U502), and GMZAN-2 (U201) through IIC(2 lines) or 4 bit bus line. It makes all devices operated properly.

4) Microprocessor (U501) let User adjust screen by OSD function.

3. LVDS(Low Voltage Differential Signal, U411)

LVDS transmitter (U411) delivers digital signal to the receiver inside LCD module by method of abstraction.

The abstracted signals are pairs of RIN0+-, RIN1+-, RIN2+-, RIN3+-, and RCLKIN+- of which voltage swing is 0.5V each.

When SHUTON pin's input is High, transmitter goes to power down mode.

4. DC/DC block

This block is composed of regulators which supplies 2.5V and 3.3V.

Each regulator's source power is 5VR from LIPS(LCD Inverter and Power Supply) block.

U806 supplies 2.5VD and 2.5VA and U802 supplies 3.3VD, 3.3V_AD, and 3.3V_PL powers to GMZAN-2's internal PLL, ADC, Pre-amp, and scaler by dropping down 5VR.

U805 supplies MODPWR-3.3V for LCD module's operation by dropping down 5VR.

5. LIPS Block (LCD Inverter and Power Supply)

This block supplies DC voltages of 5VS to interface board and 12V to inverter by converting AC input voltage of 100~240Vac.

Converting method is SMPS(Switching Mode Power Supply).

Inverter on/off signal from microprocessor makes inverter turned on or off .

DIMADJ signal from microprocessor does inverter's current adjustment for Brightness control.

ADJUSTMENT

All adjustment are thoroughly checked and corrected when the monitor leaves the factory, but sometimes several minor adjustment may be required.

Adjustment should be following procedure and after warming up for a minimum of 10 minutes.

Alignment appliances and tools.

- IBM Compatible PC
- Programmable Signal Generator.
(eg. VG-819 made by Astrodesign Co.)
- E(E)PROM with each mode data saved.
- Alignment Adapter and Software.

1. Adjustment for Factory Preset Mode

- 1) Run alignment program for LB501K on the IBM compatible PC.
- 2) Select EEPROM All Init. command and Enter.
- 3) Display cross hatch pattern at Mode 1.
- 4) Select EDID WRITE command and Enter.

2. Adjustment for White Balance

- 1) Display color 0,0 pattern at Mode 13.
- 2) Set External Bright to MAX position and Contrast to MAX Position.
- 3) Select PRESET START → BIAS CAL command and Enter.
- 4) No attempt to manually adjust, BIAS data is automatically adjusted and saved to the EEPROM.
- 5) Display color 15,0 pattern at Mode 13.
- 6) Select DRIVE CAL command and Enter.
- 7) Color 1 (9300K) and Color 2 (6500K) are automatically adjusted and saved to the EEPROM.
- 8) Select PRESET EXIT command and Enter.


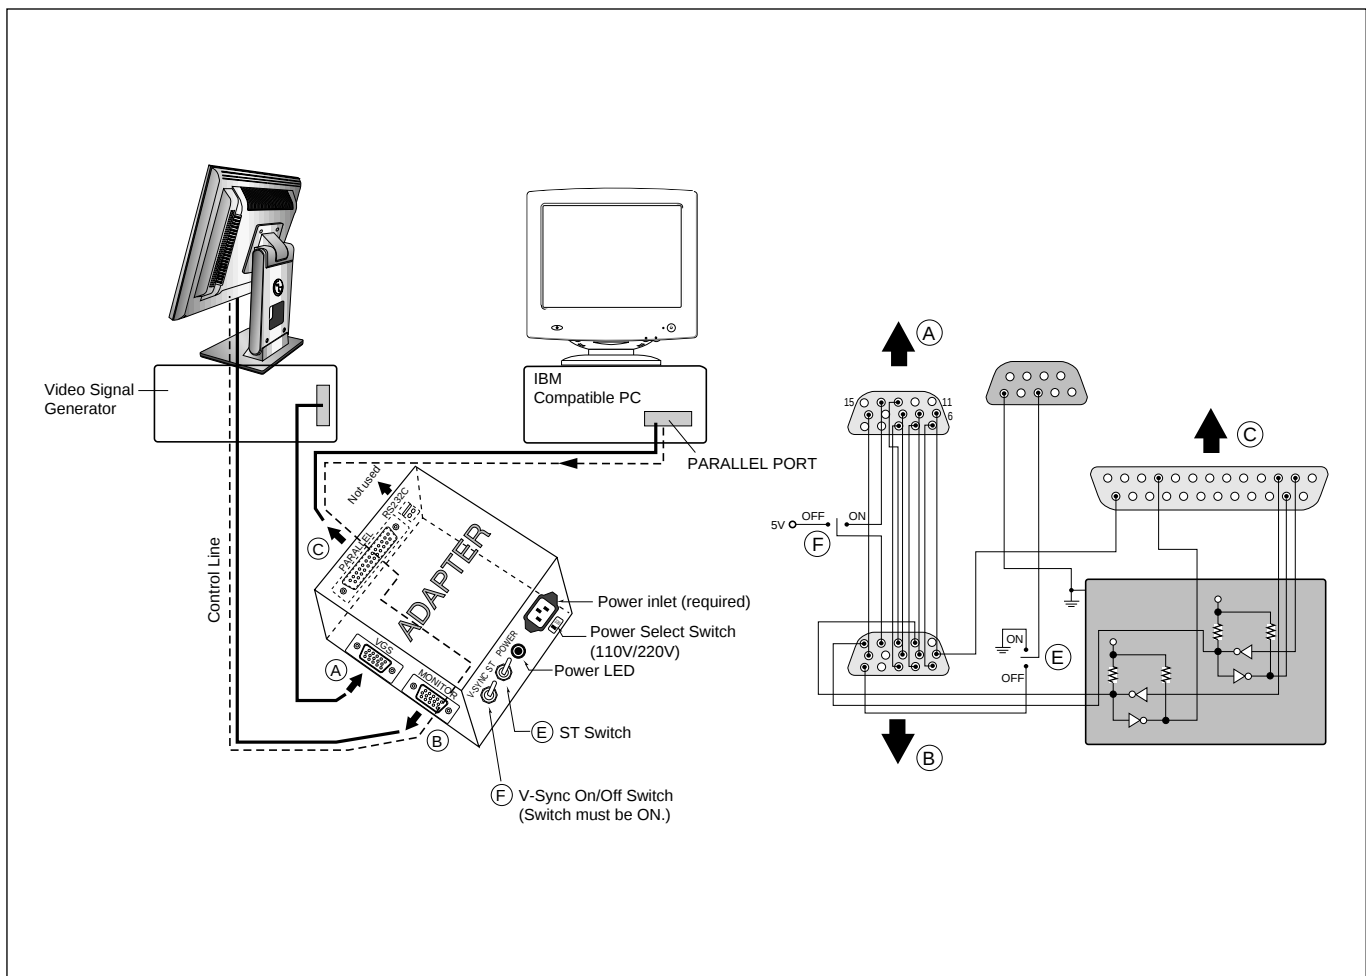



Figure 1. Cable Connection

TROUBLESHOOTING GUIDE


1. NO POWER

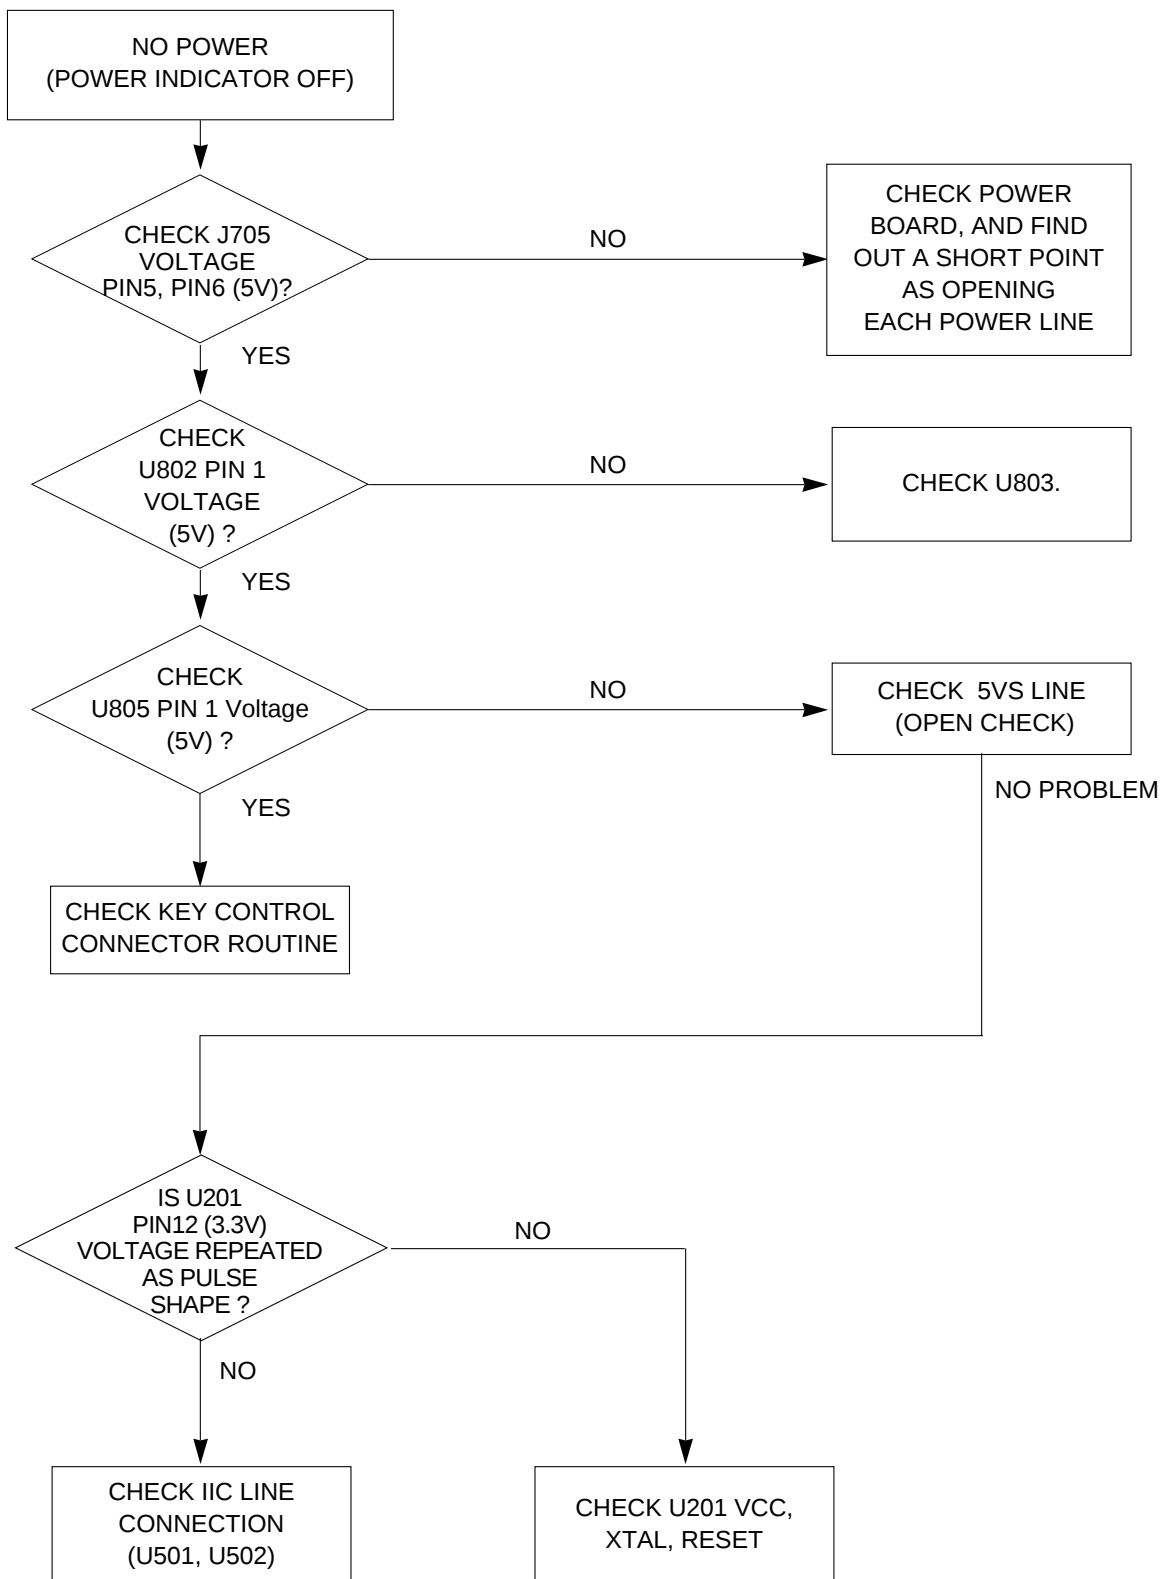


2. NO RASTER (OSD IS NOT DISPLAYED) – LIPS

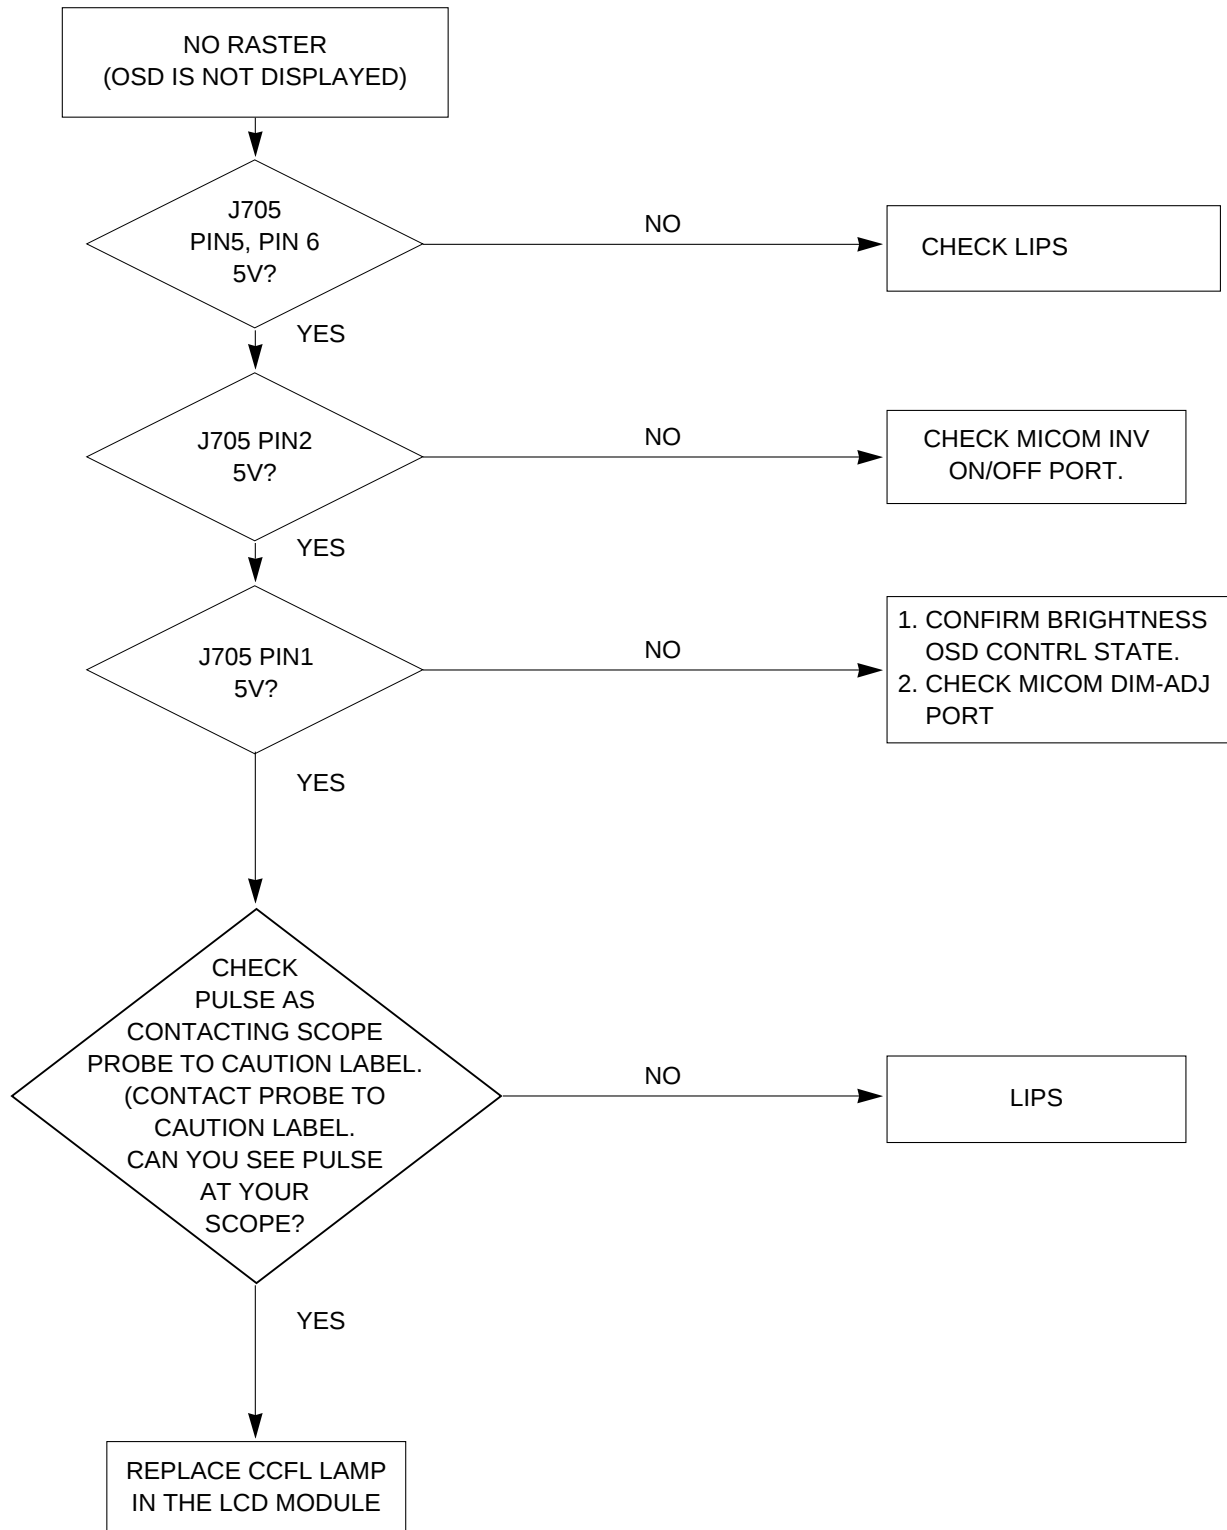

3. NO RASTER (OSD IS NOT DISPLAYED) – gmZAN2

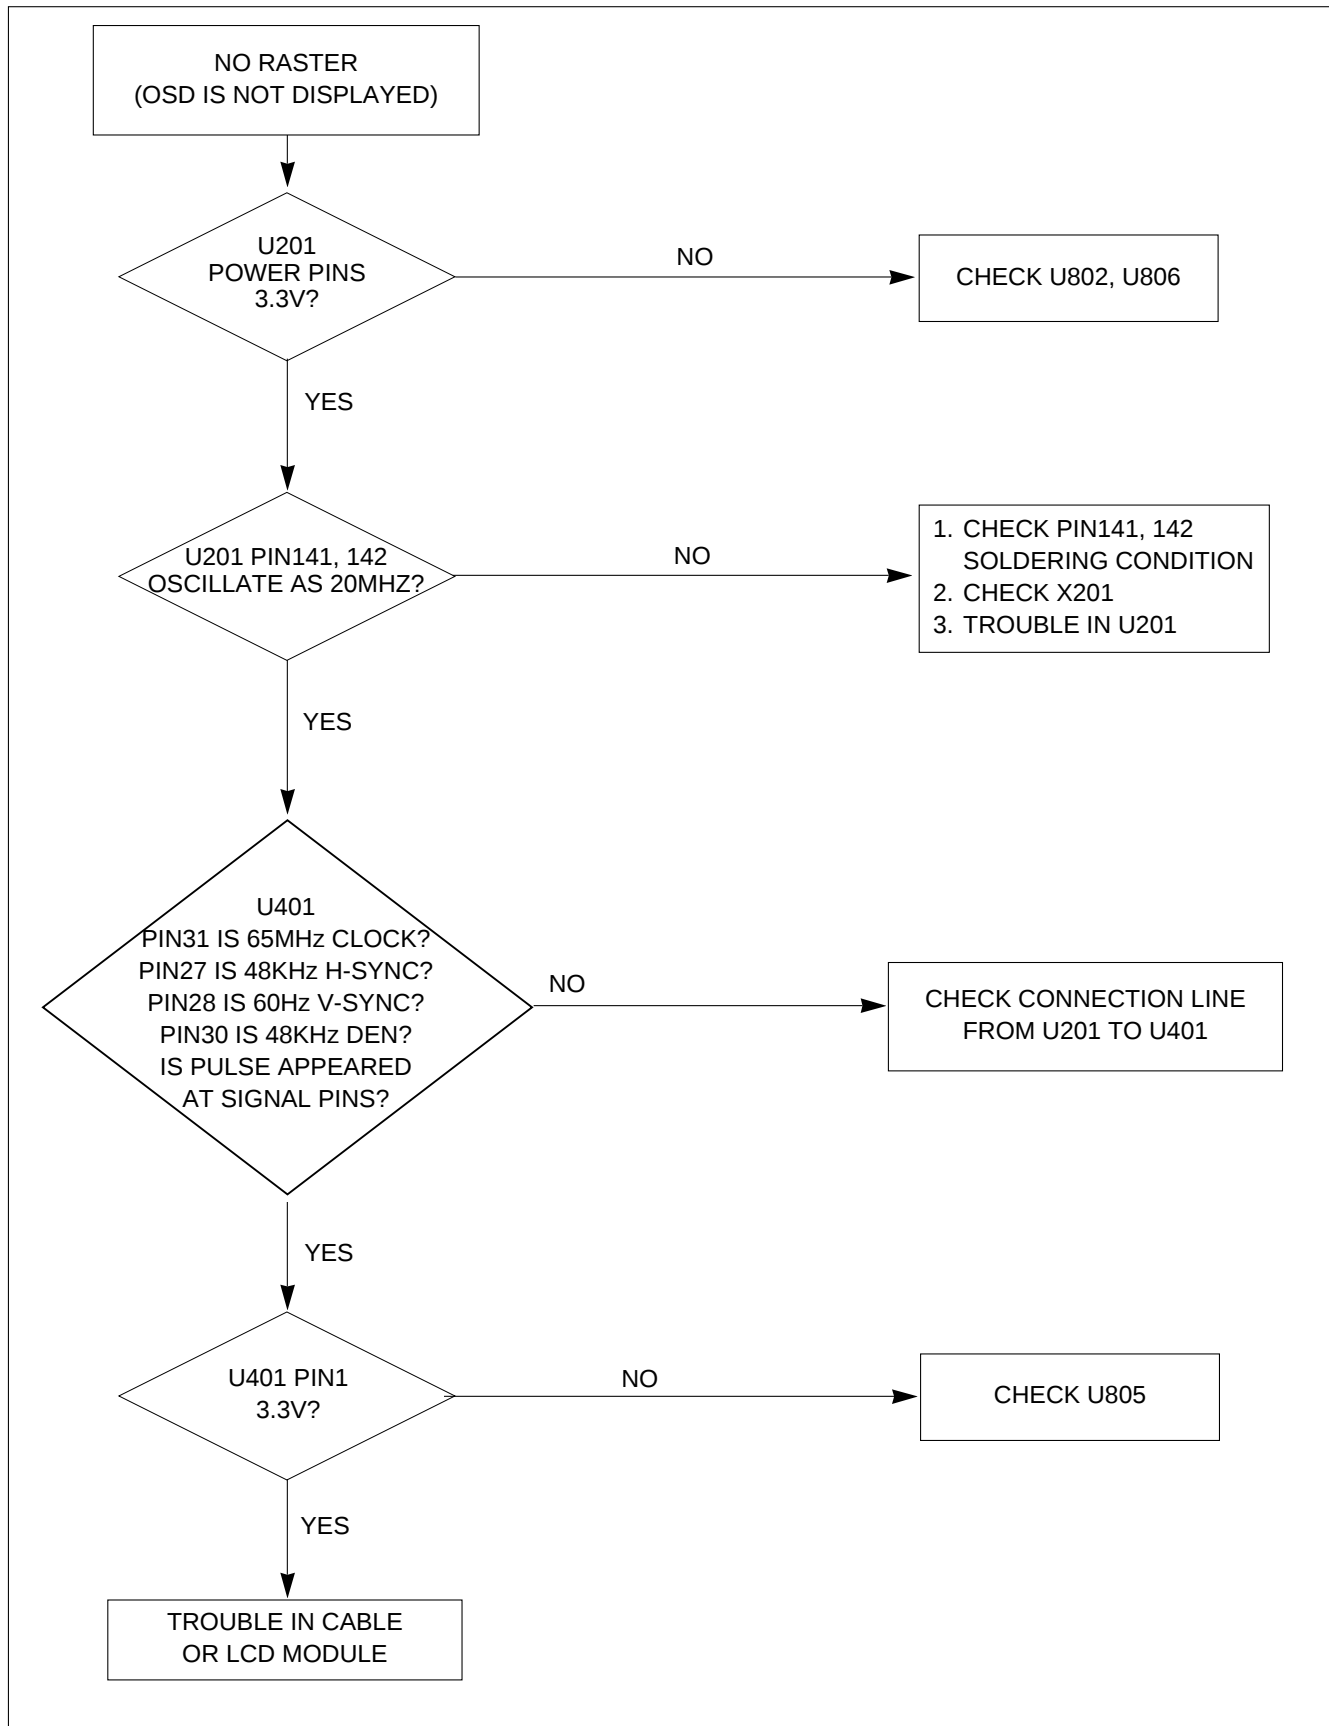

4. NO RASTER (OSD IS DISPLAYED) – gmZAN2

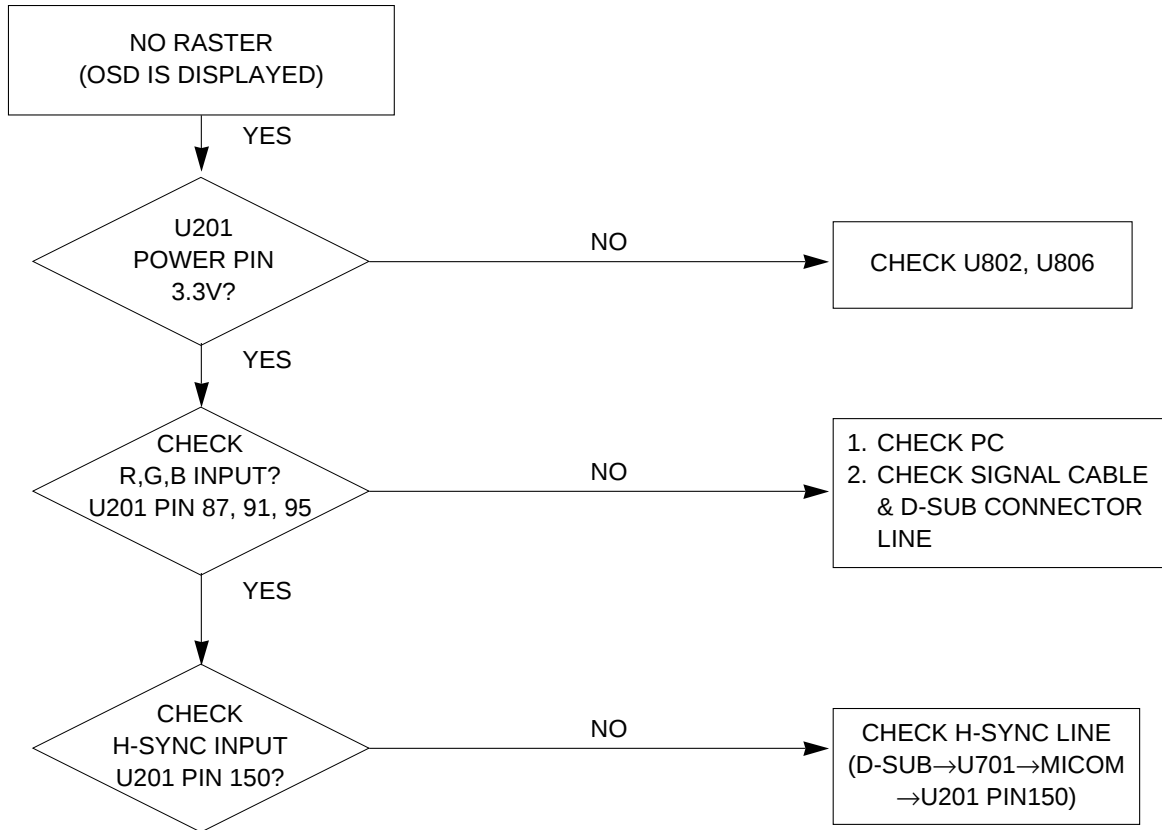

EXPLODED VIEW PARTS LIST

Ref. No.	Part No.	Description
1	3091TKL043Q	CABINET ASSEMBLY, LB501K BRAND 3090TKL040A PC+ABS
2	6304FLP025A	LCD(LIQUID CRYSTAL DISPLAY) LM150X06-A3M1 LG PHILPS TFT COLOR 15.0 INCH XGA
	or 6304FLP024A	LCD(LIQUID CRYSTAL DISPLAY) LM150X07-B4 LG PHILPS TFT COLOR 15.0 INCH XGA
3	3809TKL026L	BACK COVER ASSEMBLY, LB500J 029A PC+ABS
4-A	3043TKK097A	TILT SWIVEL ASSEMBLY LB500J . (BASE)
4-B	3043TKK092A	TILT SWIVEL ASSEMBLY LB500J
5	4951TKS091A	METAL ASSEMBLY, FRAME MAIN(LB500K,LPL MODULE)
6	6634B00051A	ADAPTER, AC-DC, PWI1502LG 5V/12A 1A/1A LIPS FOR K-CHASSIS
	6634B00053A	ADAPTER, AC-DC, ADP-30EP 5V/12A 1A/1A LIPS FOR K-CHASSIS
7	3313TL5054A	MAIN TOTAL ASSEMBLY LB500K LPL BRAND CL-32
8	4950TKK424A	METAL REAR LB500J
9	6631T11016C	CONNECTOR ASSEMBLY, 20P H-H 100MM UL20276 I/FACE CABLE LB500K
10	6871TST310A	PWB(PCB) ASSEMBLY,SUB, LB500K CONTROL TOTAL BRAND CL-32
11	6850TD9004A	CABLE,D-SUB, UL 2990-9C(5.5) DT 1870MM GRAY(85964) LB500K DM
	or 6850TD9001A	CABLE,D-SUB, UL 2990-9C(7.5) DT 1870MM GRAY(85964) BRAND DM
a	332-068U	SCREW, PPB+3*8 (MSWR/FZMW1)

REPLACEMENT PARTS LIST

CAUTION: BEFORE REPLACING ANY OF THESE COMPONENTS,
READ CAREFULLY THE **SAFETY PRECAUTIONS** IN THIS MANUAL.

* NOTE : **S** SAFETY Mark 
AL ALTERNATIVE PARTS

DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
MAIN BOARD				
CAPACITORS				
		C201	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C202	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C203	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C204	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C205	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C206	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C207	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C208	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C209	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C210	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C211	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C212	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C214	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C215	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C216	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C217	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C218	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C219	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C221	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C222	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C223	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C224	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C226	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C227	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C228	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C229	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C230	0CC080CK11A	8PF 1608 50V 0.5 PF R/TP NP0
		C231	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C233	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C234	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C237	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C238	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C239	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C240	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C241	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C242	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C243	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C244	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C245	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C246	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C247	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C248	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C249	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C254	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C255	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C256	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C257	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C258	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C259	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C261	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C262	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C269	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P


DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C270	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C271	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C401	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C402	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C403	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C404	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C405	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C501	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C502	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C503	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C504	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C505	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C506	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C507	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C508	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C509	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C512	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C513	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C514	0CH8106F611	10UF 16V M 85STD(CYL) R/TP
		C515	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C516	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C703	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C706	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C707	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C712	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C713	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C715	0CH3105F946	1UF 16V Z F 2012 R/TP
		C731	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C801	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C802	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C813	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C816	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C817	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C818	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C819	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C820	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C821	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C824	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C825	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C826	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C827	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C828	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C829	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C831	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C832	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C835	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
DIODES				
		D701	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D702	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D703	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D704	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D705	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M

DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		D706	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D707	0DS301109AA	MMBD301LT1 TP MOTOROLA SOT23 3
		D708	0DS301109AA	MMBD301LT1 TP MOTOROLA SOT23 3
		ZD701	0DZ560009GB	BZT52C5V6S DIODES R/TP SOD323
		ZD702	0DZ560009GB	BZT52C5V6S DIODES R/TP SOD323
ICs				
		U201	0IPRPGA002A	GMZAN2-160P GENESIS MICROCHIP
		U401	0ITH638300B	THC63LVDM83R THINE 56P,TSSOP R
		U501	0IZZTSZ199A	MYSON 42PIN BK OTP LB500K
		U502	0ISG240860B	M24C08W6 SGS-THOMSON 8SOP R/TP
		U701	0IMO741420B	MC74HCT14ADR2 14P,SOIC TP LEVE
		U702	0ICS240213A	CAT24WC02J-TE13 8P SOP TP 2K I
		U802	0IPMGKE011A	KIA78D33F KEC DPAK R/TP 3.3V L
		U805	0IRH033000A	BA033SFP P/MOLD-5 TP REGULATOR
		U806	0IPMGON007A	NCP1117ST25T3 ON SEMI SOT223 R
COILs & COREs				
		L201	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L202	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L203	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L204	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L205	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L401	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L701	6210TCE001S	HU-1M2012-121 CERATECH 2012MM
		L702	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L703	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L704	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L705	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L706	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L707	6210TCE001P	HB-1S2012-121JT CERATECH 2012M
		L710	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L801	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L802	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L803	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L804	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
		L805	6210TCE001G	HH-1M3216-501 CERATEC 3216MM R
TRANSISTOR				
		Q502	0TR390409AE	FAIRCHILD KST3904(LGEMTF) TP S
		Q503	0IKE704200H	KIA7042AP TO-92 TP 4.2 VOLT.
		Q701	0TR390409AE	FAIRCHILD KST3904(LGEMTF) TP S
RESISTORS				
		R201	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R202	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R203	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R204	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R205	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R206	0RJ2701D677	2.7K OHM 1/10 W 5% 1608 R/TP
		R207	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R208	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R209	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R210	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R401	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R403	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R404	0RJ5601D477	5.6K OHM 1/10 W 1% 1608 R/TP
		R501	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP

DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R502	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R503	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R504	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R505	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R506	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R507	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R508	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R509	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R510	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R511	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R512	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R513	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R515	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R516	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R517	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R518	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R519	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R520	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R521	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R522	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R523	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R524	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R525	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R526	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R527	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R528	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R529	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R530	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R531	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R532	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/TP
		R533	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R534	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R535	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/TP
		R536	0RJ1004D677	1000000 OHM 1/10 W 5% 1608 R/TP
		R537	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R540	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R541	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R551	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R561	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R571	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R581	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R701	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R703	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R705	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R706	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R707	0RJ0272D677	27 OHM 1/10 W 5% 1608 R/TP
		R708	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R709	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R711	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R712	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R713	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R714	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R715	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R716	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R717	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R722	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R723	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R724	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R725	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R726	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R727	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP
		R733	0RJ1501D677	1.5K OHM 1/10 W 5% 1608 R/TP

PIN CONFIGURATION


CAT24WC02J-TE13 8P

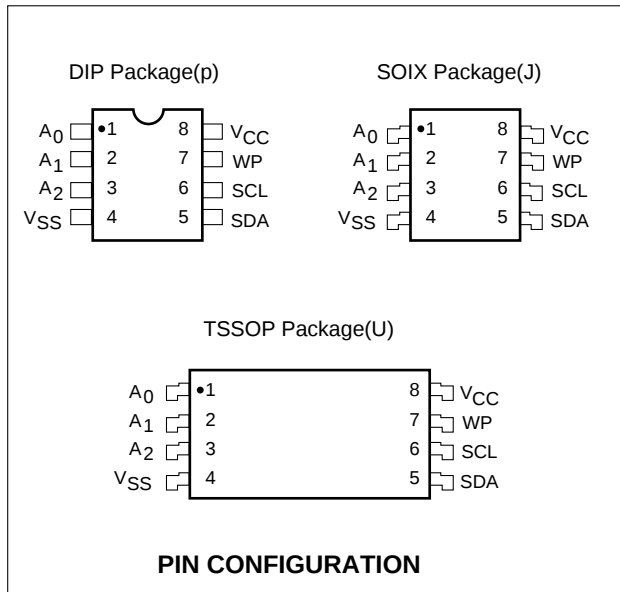


PIN FUNCTION

Pin Name	Function
A0, A1, A2	Device Address Inputs
SDA	Serial Data/Address
SCL	Serial Clock
WP	Write Protect
Vcc	+1.8V to + 6.0V power Supply
Vss	Ground


BLOCK DIAGRAM

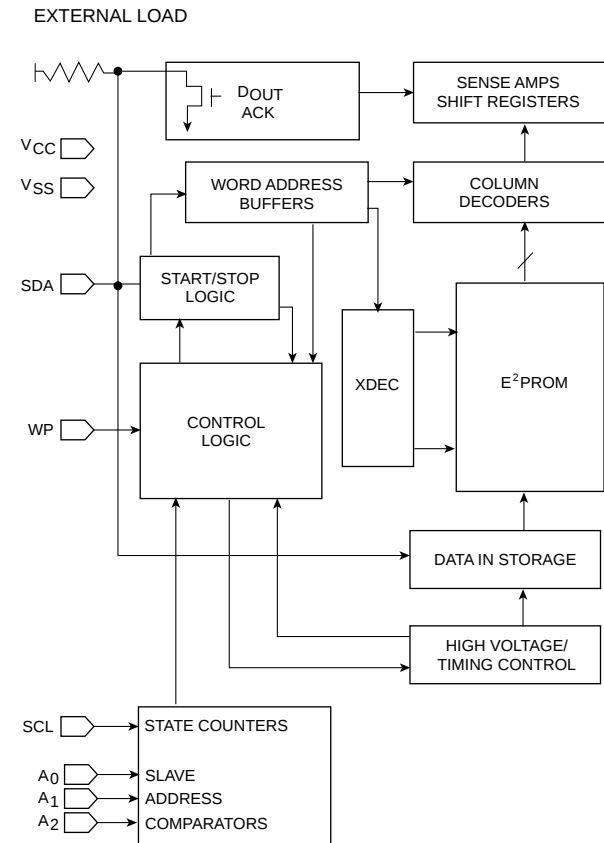

MC74HCT14ADR2 14P

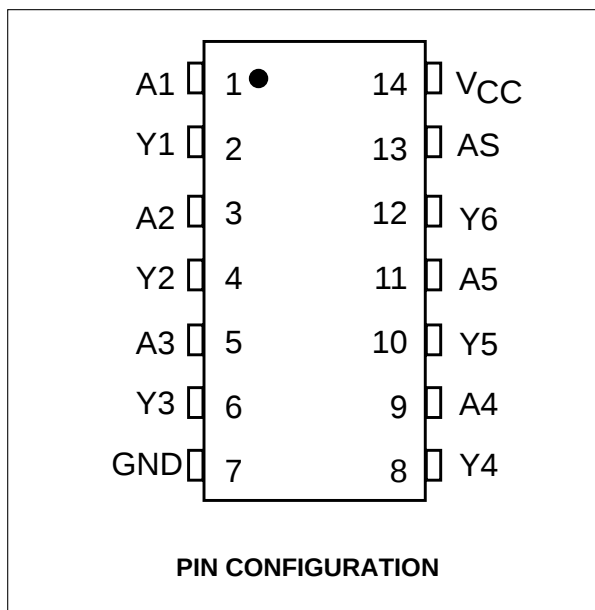

BLOCK DIAGRAM

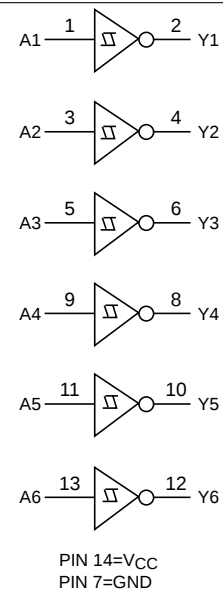


THC63LVDM83R

PIN CONFIGURATION

THC63LVDM83R			
RS	1	56	TA4
TD1	2	55	TA3
TA5	3	54	TA2
TA6	4	53	GND
GND	5	52	TA1
TB0	6	51	TA0
TB1	7	50	TD0
TD2	8	49	LVDS GND
VCC	9	48	TA-
TD3	10	47	TA+
TB2	11	46	TB-
TB3	12	45	TB+
GND	13	44	LVDS VCC
TB4	14	43	LVDS GND
TB5	15	42	TC-
TD4	16	41	TC+
R/F	17	40	TCLK -
TD5	18	39	TCLK+
TB6	19	38	TD-
TC0	20	37	TD+
GND	21	36	LVDS GND
TC1	22	35	PLL GND
TC2	23	34	PLL VCC
TC3	24	33	PLL GND
TD6	25	32	/PDWN
VCC	26	31	CLK IN
TC4	27	30	TC6
TC5	28	29	GND


BLOCK DIAGRAM

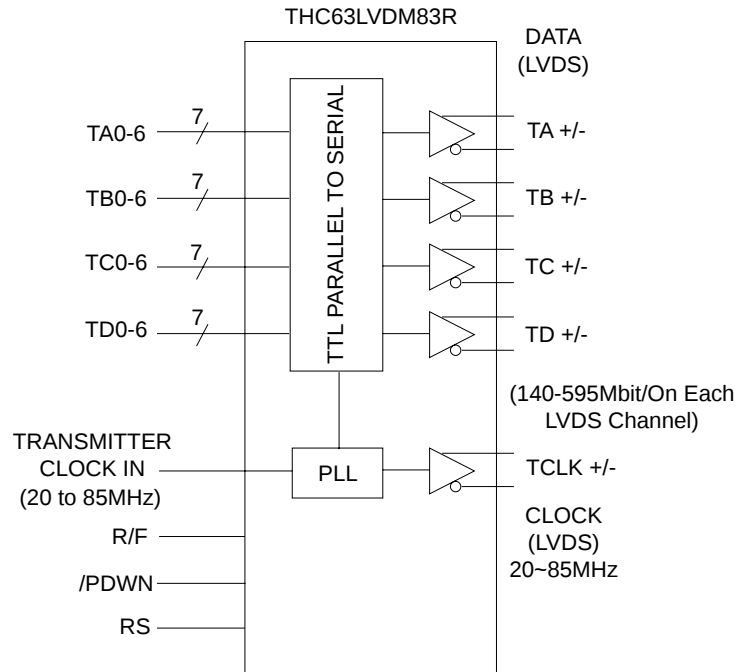


1. GMZAN2



2. LVDS

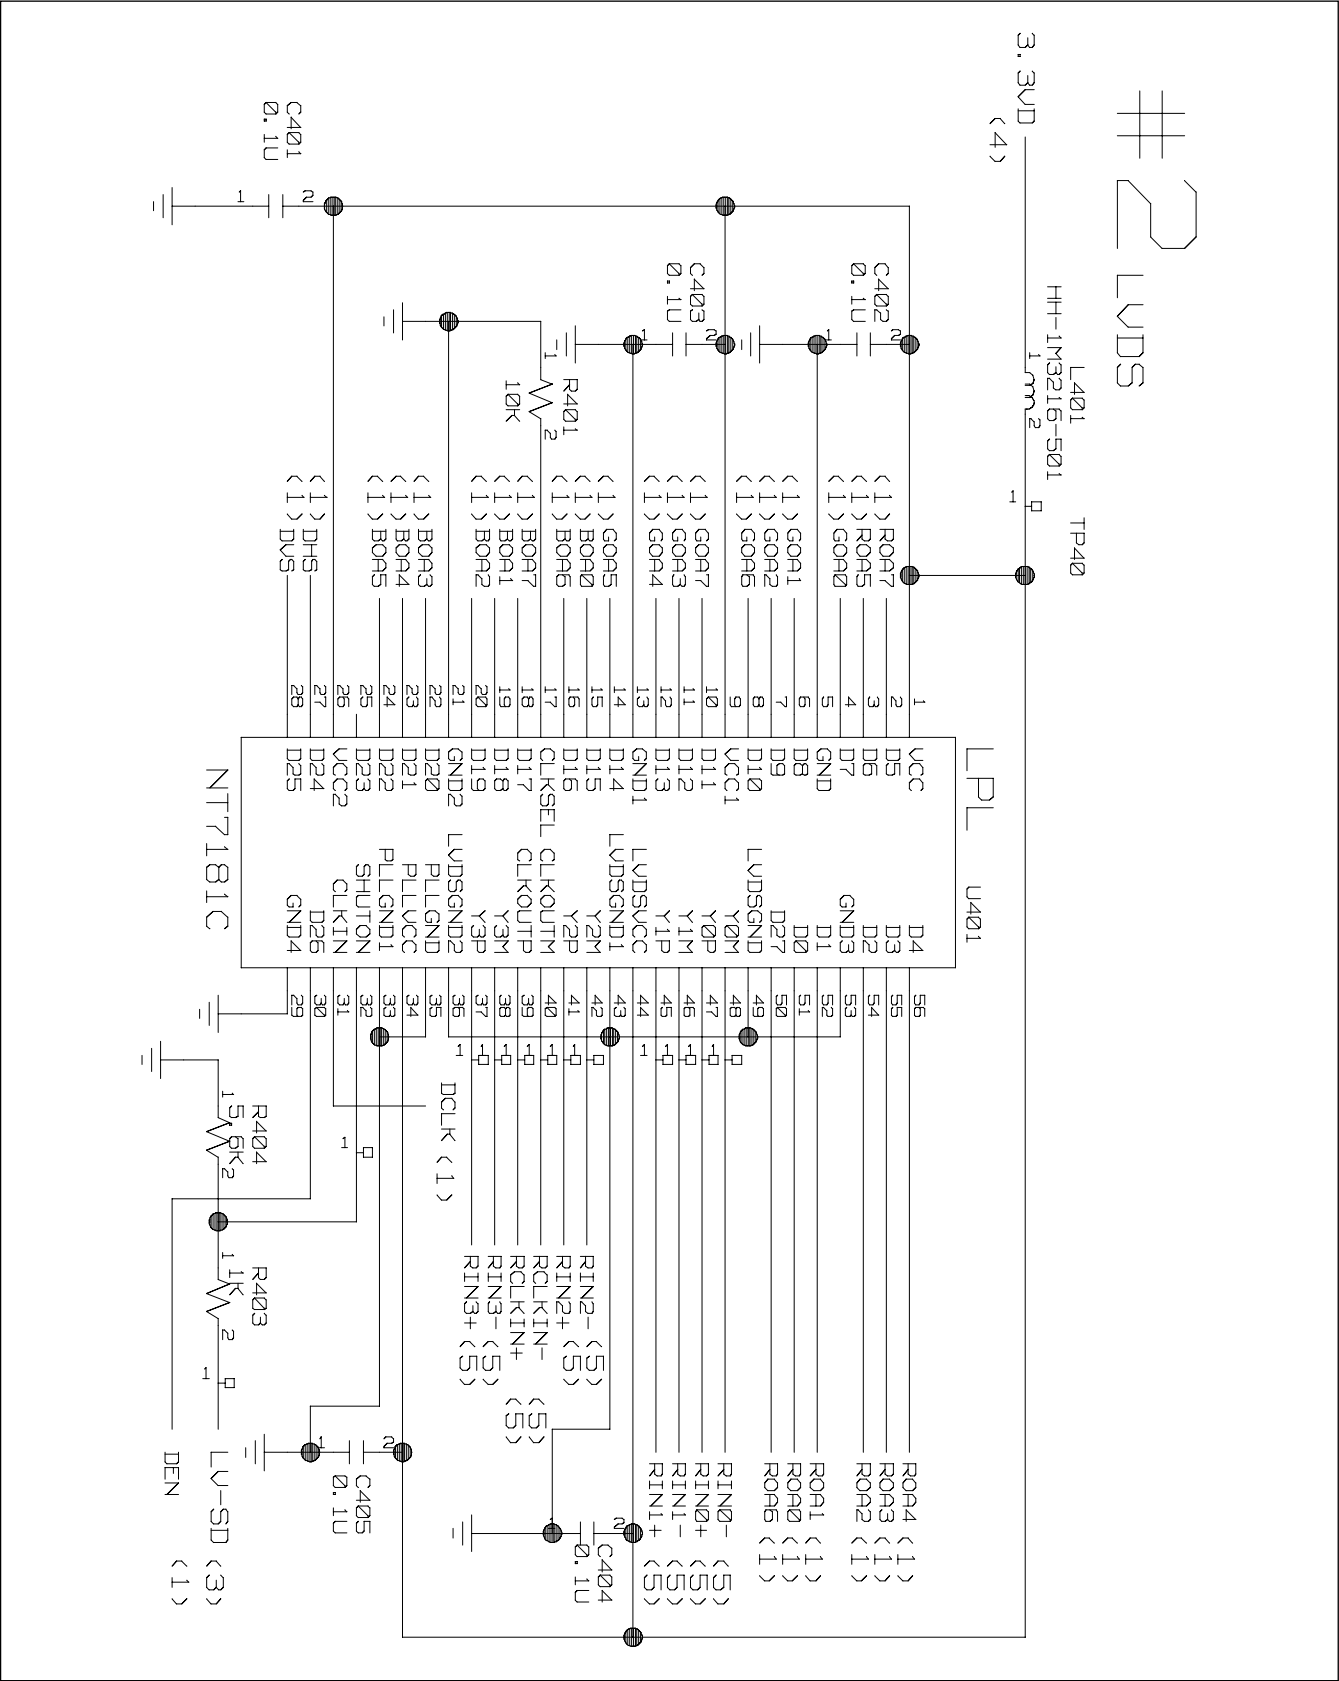


- 24 -

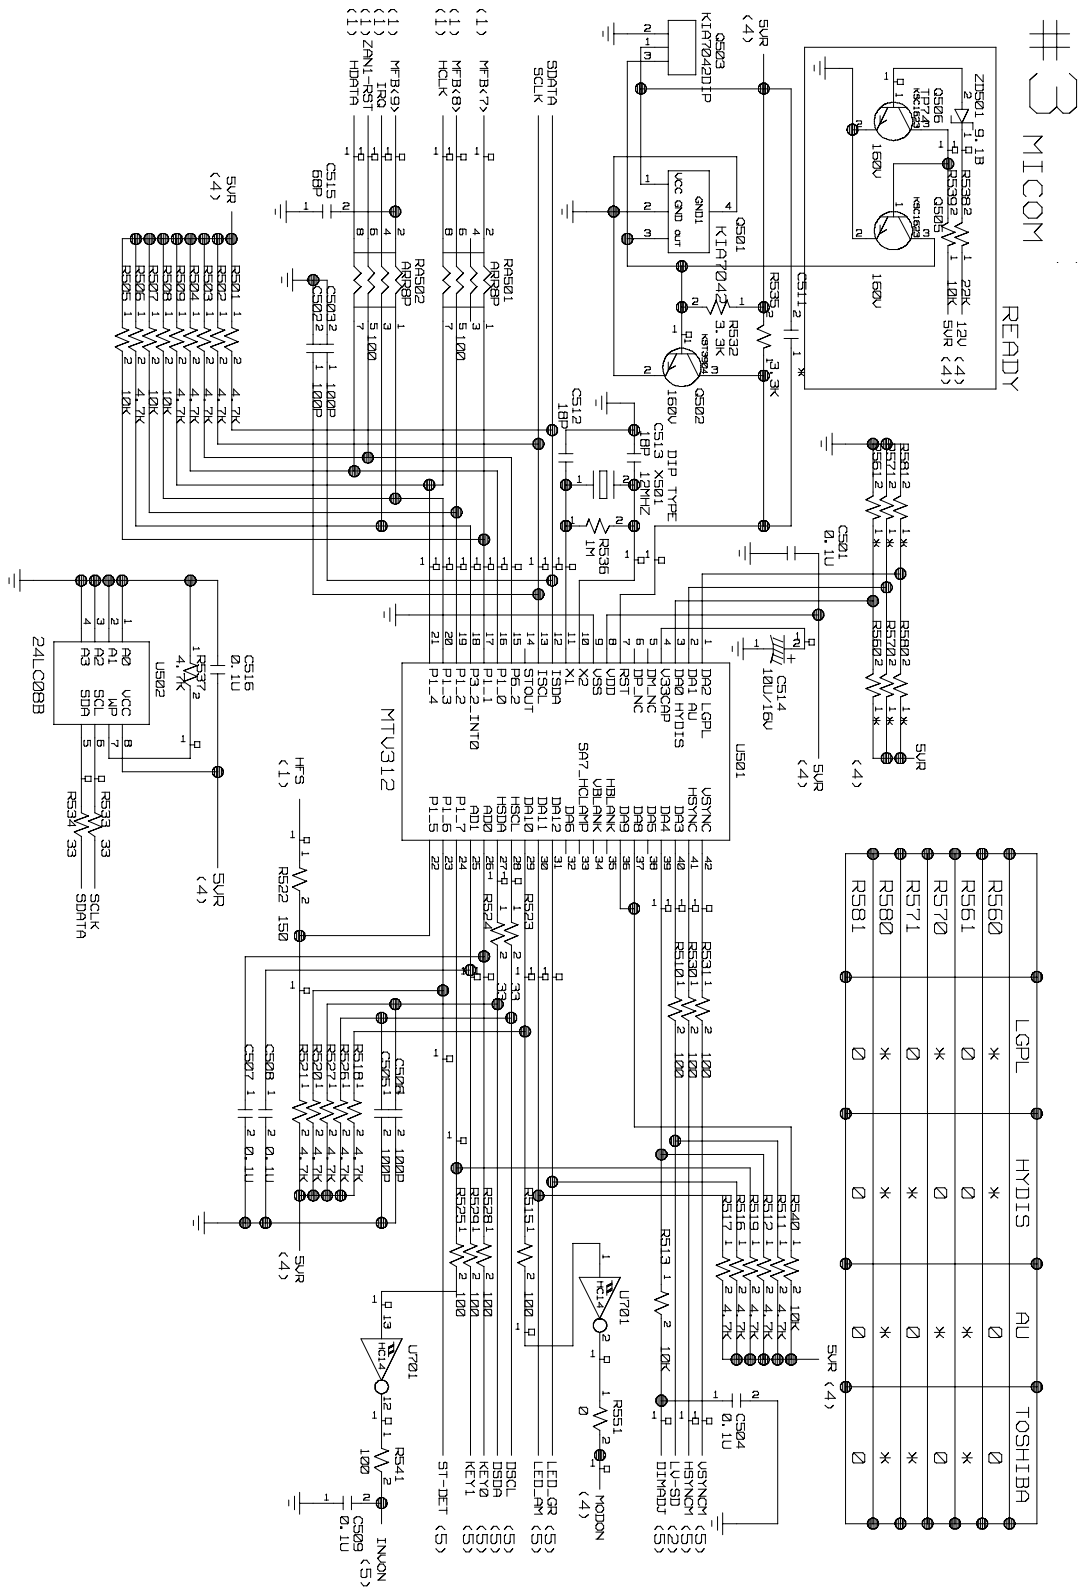



5. CONNECTOR & JACKS

#5 CONNECTOR & JACKS

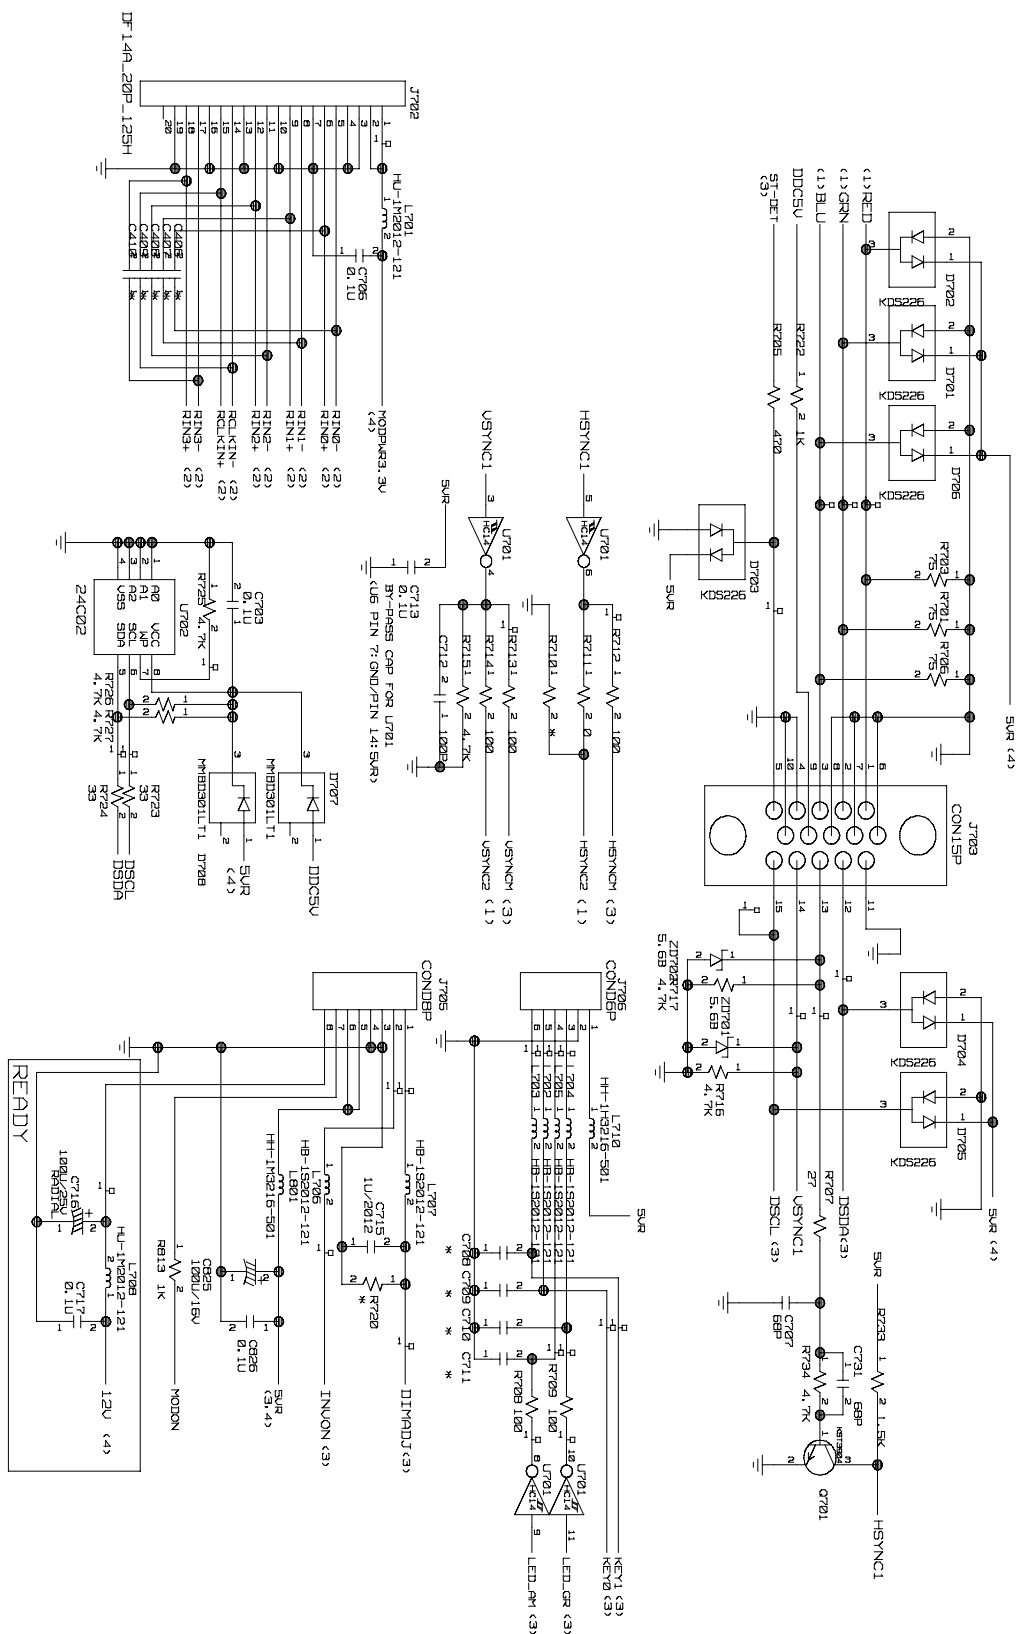

6. KEY PART

