

LG

COLOR MONITOR SERVICE MANUAL


CHASSIS NO. : CL-32

FACTORY MODEL: LB501K

MODEL: FLATRON L1511S (LB501K-GL)

CAUTION

BEFORE SERVICING THE UNIT,
READ THE **SAFETY PRECAUTIONS** IN THIS MANUAL.



CONTENTS

SPECIFICATIONS	2	ADJUSTMENT	9
PRECAUTIONS	3	TROUBLESHOOTING GUIDE	10
TIMING CHART	4	PRINTED CIRCUIT BOARD.....	14
OPERATING INSTRUCTIONS	5	EXPLODED VIEW	15
WIRING DIAGRAM	6	REPLACEMENT PARTS LIST	17
BLOCK DIAGRAM	7	PIN CONFIGURATION.....	20
DESCRIPTION OF BLOCK DIAGRAM	8	SCHEMATIC DIAGRAM	22

SPECIFICATIONS

1. LCD CHARACTERISTICS

Type : TFT XGA LCD Module
Size : 352.0(H) x 263.5(V) x 14.0(T)
Pixel Pitch : 0.297mm x 0.297mm
Color Depth : 6bits(with FRC)/ 16M colors
Active Video Area : 15.0inch
(304.128 x 228.096)
Surface Treatment : Anti-Glare, Hard Coating (3H)
Backlight Unit : Top/Bottom edge side 2CCFL
Electrical Interface : LVDS interface

2. OPTICAL CHARACTERISTICS

2-1. Viewing Angle by Contrast Ratio ≥ 10
Left : 55° min. Right : 55° min.
Top : 40° min. Bottom : 40° min.

2-2. Luminance
: 200(min.), 250(typ.) at Center point

2-3. Contrast Ratio :250(min.), 350(typ.)

3. SIGNAL (Refer to the Timing Chart)

3-1. Sync Signal
1) Type : Separate Sync. (Horizontal & Vertical)
2) Input Voltage Level : Low=0~0.8V, High=2.1~5.5V
3) Sync Polarity : Positive or Negative

3-2. Video Input Signal
1) Type : R, G, B Analog
2) Voltage Level : 0~0.714 V
a) Color 0, 0 : 0 Vp-p
b) Color 7, 0 : 0.467 Vp-p
c) Color 15, 0 : 0.714 Vp-p
3) Input Impedance : 75 Ω

3-3. Operating Frequency
Horizontal : 30 ~ 63kHz
Vertical : 56 ~ 75Hz

4. POWER SUPPLY

4-1. Power
100~240V, 50/60Hz 0.6A

4-2. Power Consumption

MODE	H/V SYNC	VIDEO	POWER CONSUMPTION	LED COLOR
POWER ON (MAX)	ON/ON	ACTIVE	less than 30 W	GREEN
POWER ON (NORMAL)	ON/ON	ACTIVE	less than 28 W	GREEN
STAND-BY	OFF/ON	OFF	less than 3 W	AMBER
SUSPEND	ON/OFF	OFF	less than 3 W	AMBER
DPMS OFF	-	-	less than 3 W	AMBER

5. ENVIRONMENT

5-1. Operating Temperature: 10°C~35°C (50°F~95°F)
(Ambient)

5-2. Relative Humidity : 10%~80%
(Non-condensing)

5-3. MTBF : 50,000 Hours (Min.)
Lamp Life : 30,000 Hours (Min.)

6. DIMENSIONS (with TILT/SWIVEL)

Width : 356mm (14.01")
Depth : 151.7mm (5.97")
Height : 359.8mm (14.16")

7. WEIGHT (with TILT/SWIVEL)

Net. Weight : 4.0kg (8.82 lbs)
Gross Weight : 5.5kg (12.13 lbs)

PRECAUTION

WARNING FOR THE SAFETY-RELATED COMPONENT.

- There are some special components used in LCD monitor that are important for safety. ***These parts are marked ⚠ on the schematic diagram and the replacement parts list.*** It is essential that these critical parts should be replaced with the manufacturer's specified parts to prevent electric shock, fire or other hazard.
- Do not modify original design without obtaining written permission from manufacturer or you will void the original parts and labor guarantee.

⚠ WARNING

BE CAREFUL ELECTRIC SHOCK !

- If you want to replace with the new backlight (CCFL) or inverter circuit, must disconnect the AC adapter because high voltage appears at inverter circuit about 650Vrms.
- Handle with care wires or connectors of the inverter circuit. If the wires are pressed cause short and may burn or take fire.


TAKE CARE DURING HANDLING THE LCD MODULE WITH BACKLIGHT UNIT.

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body are grounded through wrist band.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- The module not be exposed to the direct sunlight.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel become dirty, please wipe it off with a softmaterial. (Cleaning with a dirty or rough cloth may damage the panel.)

⚠ CAUTION

Please use only a plastic screwdriver to protect yourself from shock hazard during service operation.


TIMING CHART

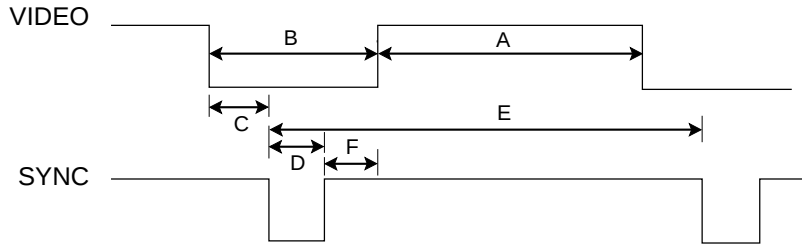


MODE	H / V	Sync Polarity	Dot Clock	Frequency	Total Period (E)	Video Active Time (A)	Blanking Time (B)	Sync Duration (D)	Back Porch (F)	Front Porch (C)	Resolution
1	H (Pixels)	+	25.175	31.468 KHz	800	640	160	96	48	16	640 x 350
	V (Lines)	-		70.0 Hz	449	350	99	2	60	37	
2	H (Pixels)	-	28.322	31.468 KHz	900	720	180	108	55	17	720 x 400 (TEXT)
	V (Lines)	+		70.0 Hz	449	400	49	2	34	13	
3	H (Pixels)	-	25.175	31.469 KHz	800	640	160	96	48	16	640 x 480
	V (Lines)	-		60.0 Hz	525	480	45	2	33	10	
4	H (Pixels)	-	30.24	35.00 KHz	864	640	224	64	96	64	640 x 480
	V (Lines)	-		66.67 Hz	525	480	45	3	39	3	
5	H (Pixels)	-	31.5	37.861 KHz	832	640	192	40	128	24	640 x 480
	V (Lines)	-		72.8 Hz	520	480	40	3	28	9	
6	H (Pixels)	-	31.5	37.50 KHz	840	640	200	64	120	16	640 x 480
	V (Lines)	-		75.0 Hz	500	480	20	3	16	1	
7	H (Pixels)	+	36.0	35.156KHz	1024	800	224	72	128	24	800 x 600
	V (Lines)	+		56.25 Hz	625	600	25	2	22	1	
8	H (Pixels)	+	40.0	37.879 KHz	1056	800	256	128	88	40	800 x 600
	V (Lines)	+		60.3 Hz	628	600	28	4	23	1	
9	H (Pixels)	+	50.0	48.077 KHz	1040	800	240	120	64	56	800 x 600
	V (Lines)	+		72.188 Hz	666	600	66	6	23	37	
10	H (Pixels)	+	49.5	46.875 KHz	1056	800	256	80	160	16	800 x 600
	V (Lines)	+		75.0 Hz	625	600	25	3	21	1	
11	H (Pixels)	-	57.2832	49.725 KHz	1152	832	320	64	224	32	832 x 624 (MAC)
	V (Lines)	-		74.55 Hz	667	624	43	3	39	1	
12	H (Pixels)	-	65	48.363 KHz	1344	1024	320	136	160	24	1024 x 768
	V (Lines)	-		60.0 Hz	806	768	38	6	29	3	
13	H (Pixels)	-	75	56.476 KHz	1328	1024	304	136	144	24	1024 x 768
	V (Lines)	-		70.0 Hz	806	768	38	6	29	3	
14	H (Pixels)	+	78.75	60.023 KHz	1312	1024	288	96	176	16	1024 x 768
	V (Lines)	+		75.0 Hz	800	768	32	3	28	1	

OPERATING INSTRUCTIONS


FRONT VIEW

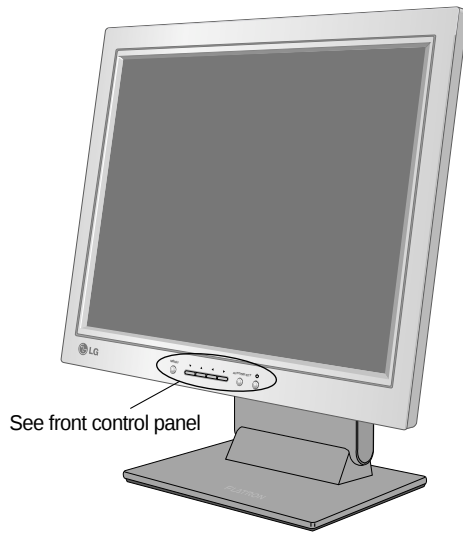

REAR VIEW

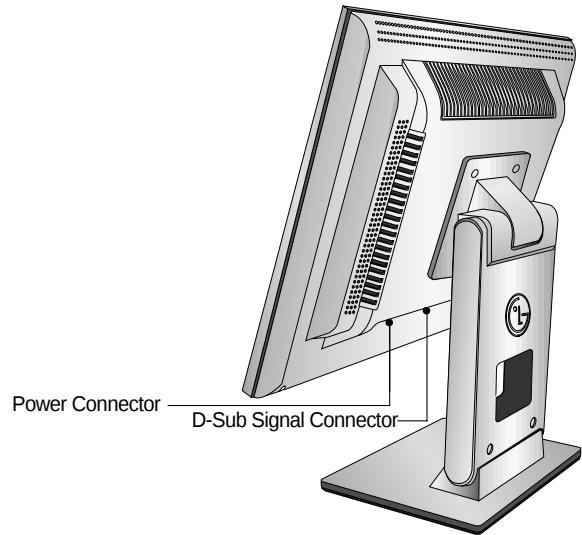

Front Control Panel

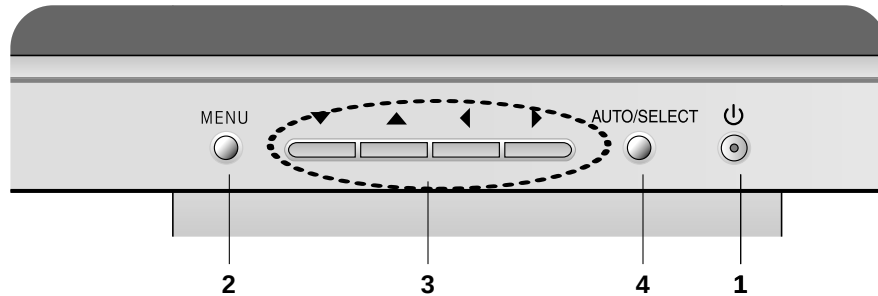

1. Power Button

Use this button to turn the display on or off.

<Power (DPMS) Indicator>


This Indicator lights up green when the display operates normally. If the display is in DPM (Energy Saving) mode, this indicator color changes to amber.

2. Menu Button

Use this button to enter or exit the On Screen Display.

3. ▲▼/◀▶ Button

Use these buttons to choose or adjust items in the On Screen Display.



Bring up Contrast and Brightness adjustment.

4. AUTO/SELECT Button

Use this button to enter a selection in the On Screen Display.




When adjusting your display settings, always press the **AUTO/SELECT** button before entering the On Screen Display(OSD). This will automatically adjust your display image to the ideal settings for the current screen resolution size (display mode).


The best display mode is **1024x768**.

WIRING DIAGRAM

**Connector Ass'y :
P/N: 6631T11016C**

**Connector Ass'y :
P/N: 6631T20008U**

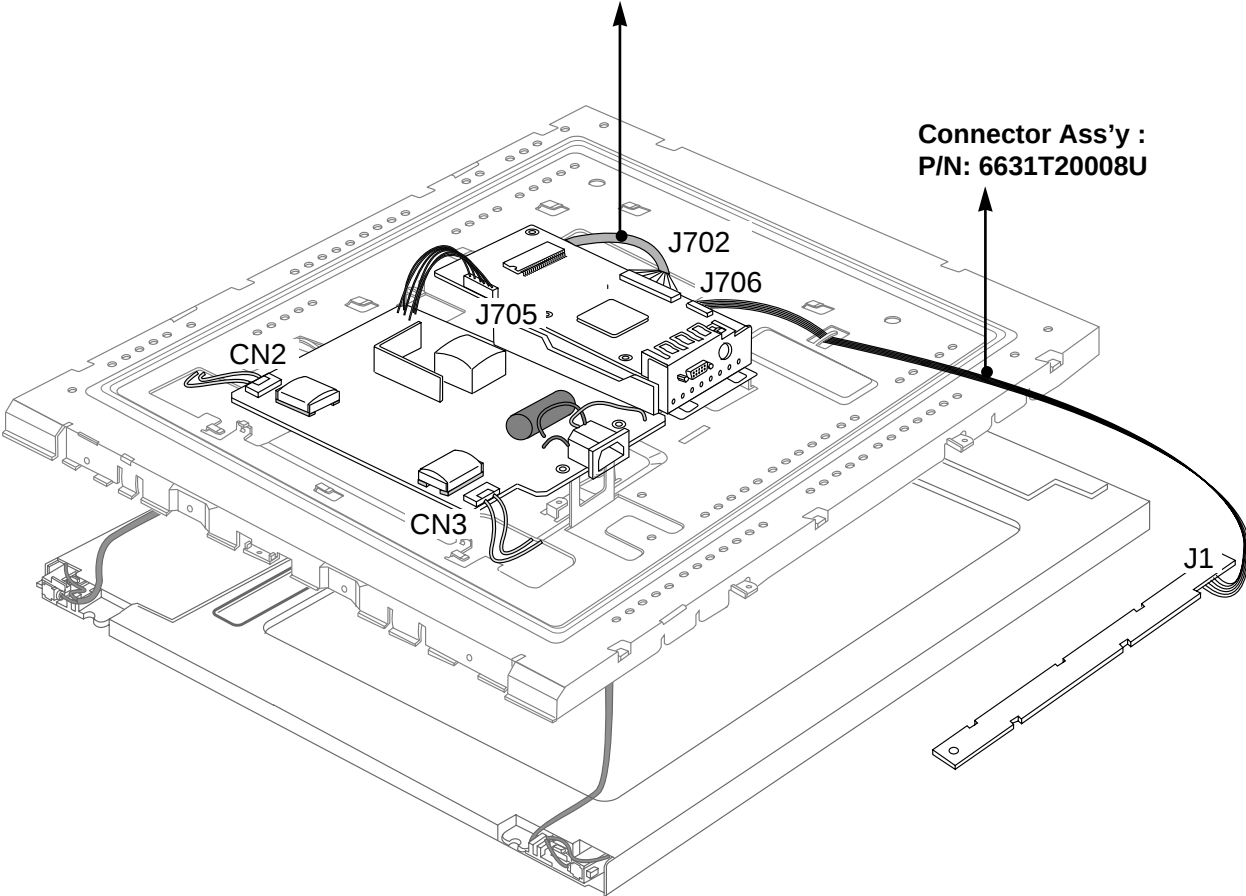

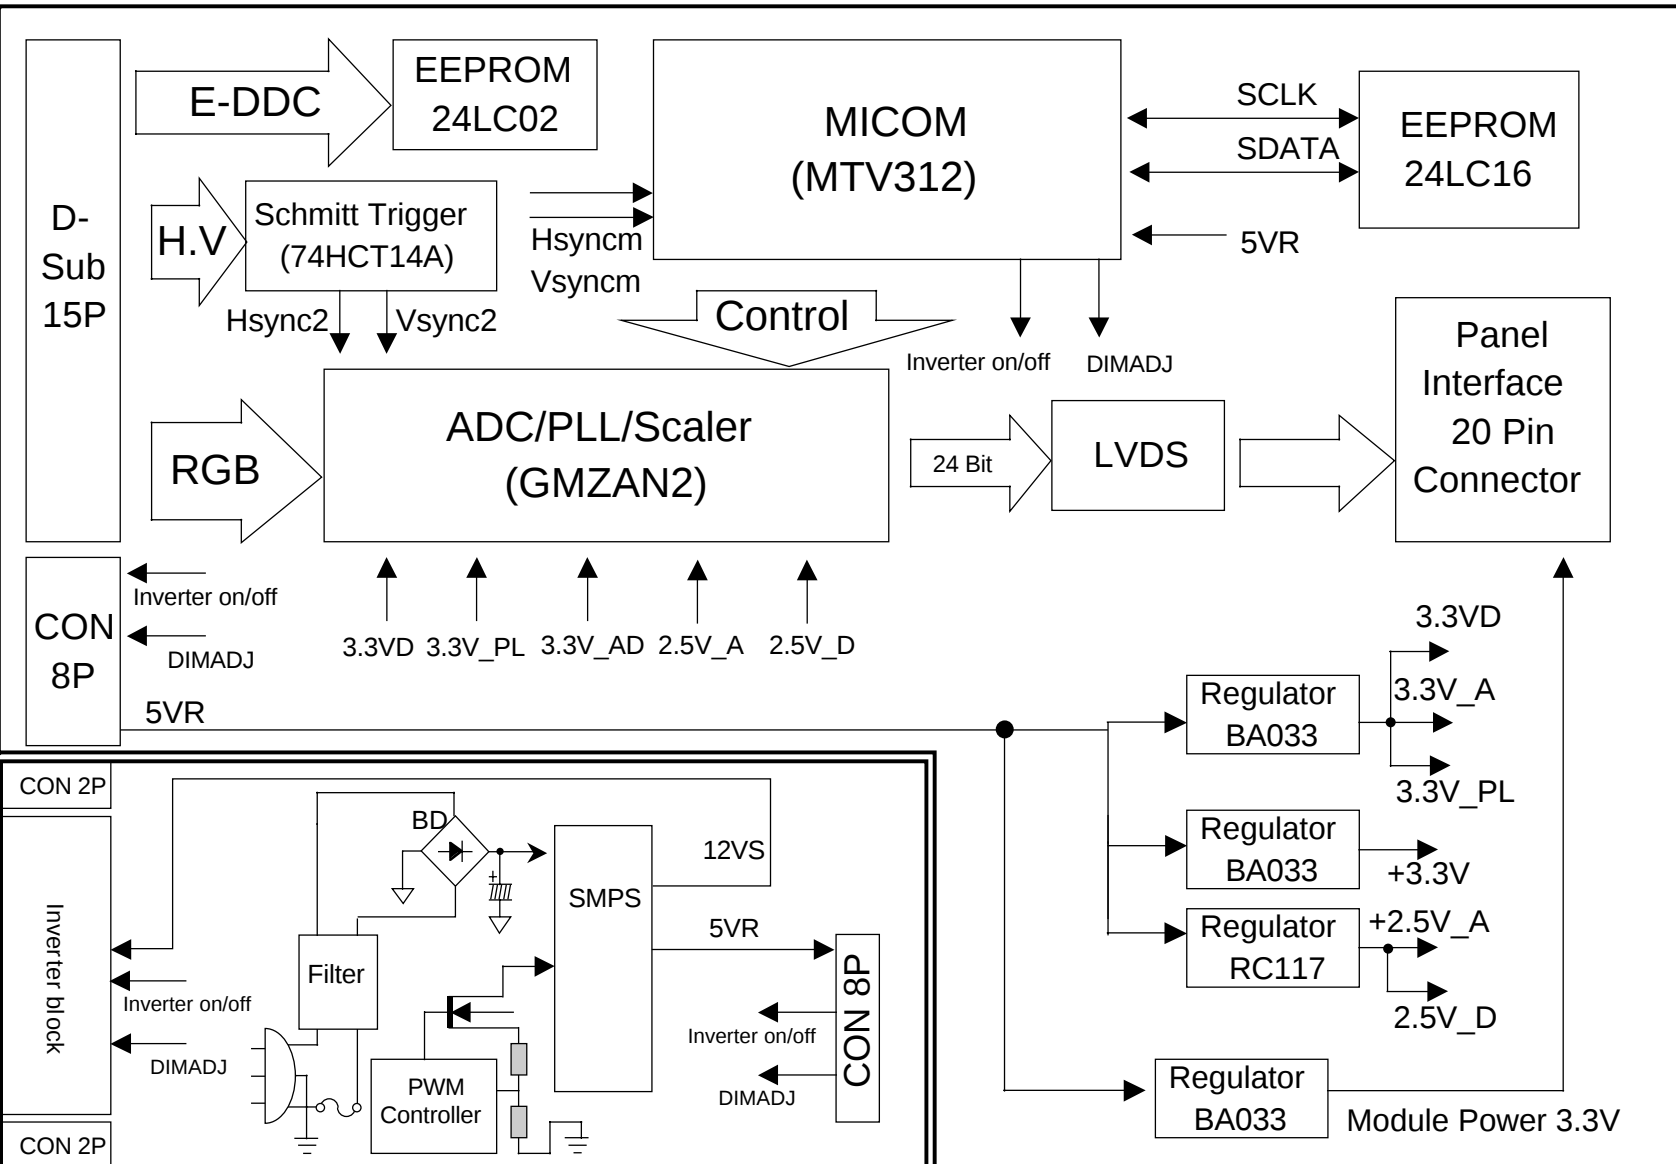

DESCRIPTION OF BLOCK DIAGRAM

1. Scaler One chip IC(GMZAN-2, U201)

GMZAN-2 (U201) is one chip IC which it supports four internal function blocks of Video Amp, PLL, A/D converter and Video processor.

Video signal (0.7Vp.p) clamped through C207, 208, 209 with matching IC's proper cut off voltage.

This signal is processed as a proper 8 bit digital signal by U201's amplifying, phase locking, A/D converting, and scaling operations.

U201 outputs 24bit RGB data and control signals(Clock, Horizontal and Vertical sync, and Data Enable) as LVDS IC's input signals.

2. System Controller (Microprocessor) Circuit

- 1) Microprocessor (U501) distinguishes polarity and frequency by calculating horizontal and vertical sync input from signal source.
- 2) Microprocessor (U501) carries out power control by sending power-down trigger signal to each IC.
- 3) Microprocessor (U501) communicates with EEPROM (U502), and GMZAN-2 (U201) through IIC(2 lines) or 4 bit bus line. It makes all devices operated properly.
- 4) Microprocessor (U501) let User adjust screen by OSD function.

3. LVDS(Low Voltage Differential Signal, U411)

LVDS transmitter (U411) delivers digital signal to the receiver inside LCD module by method of abstraction. The abstracted signals are pairs of RIN0+-, RIN1+-, RIN2+-, RIN3+-, and RCLKIN+- of which voltage swing is 0.5V each.

When SHUTON pin's input is High, transmitter goes to power down mode.

4. DC/DC block

This block is composed of regulators which supplies 2.5V and 3.3V.

Each regulator's source power is 5VR from LIPS(LCD Inverter and Power Supply) block.

U806 supplies 2.5VD and 2.5VA and U802 supplies 3.3VD, 3.3V_AD, and 3.3V_PL powers to GMZAN-2's internal PLL, ADC, Pre-amp, and scaler by dropping down 5VR.

U805 supplies MODPWR-3.3V for LCD module's operation by dropping down 5VR.

5. LIPS Block (LCD Inverter and Power Supply)

This block supplies DC voltages of 5VS to interface board and 12V to inverter by converting AC input voltage of 100~240Vac.

Converting method is SMPS(Switching Mode Power Supply).

Inverter on/off signal from microprocessor makes inverter turned on or off .

DIMADJ signal from microprocessor does inverter's current adjustment for Brightness control.

ADJUSTMENT

All adjustment are thoroughly checked and corrected when the monitor leaves the factory, but sometimes several minor adjustment may be required. Adjustment should be following procedure and after warming up for a minimum of 10 minutes. Alignment appliances and tools.

- IBM Compatible PC
- Programmable Signal Generator.
(eg. VG-819 made by Astrodesign Co.)
- E(E)PROM with each mode data saved.
- Alignment Adapter and Software.

1. Adjustment for Factory Preset Mode

- 1) Run alignment program for LB501K on the IBM compatible PC.
- 2) Select EEPROM All Init. command and Enter.
- 3) Display cross hatch pattern at Mode 1.
- 4) Select EDID WRITE command and Enter.

2. Adjustment for White Balance

- 1) Display color 0,0 pattern at Mode 13.
- 2) Set External Bright to MAX position and Contrast to MAX Position.
- 3) Select PRESET START → BIAS CAL command and Enter.
- 4) No attempt to manually adjust, BIAS data is automatically adjusted and saved to the EEPROM.
- 5) Display color 15,0 pattern at Mode 13.
- 6) Select DRIVE CAL command and Enter.
- 7) Color 1 (9300K) and Color 2 (6500K) are automatically adjusted and saved to the EEPROM.
- 8) Select PRESET EXIT command and Enter.


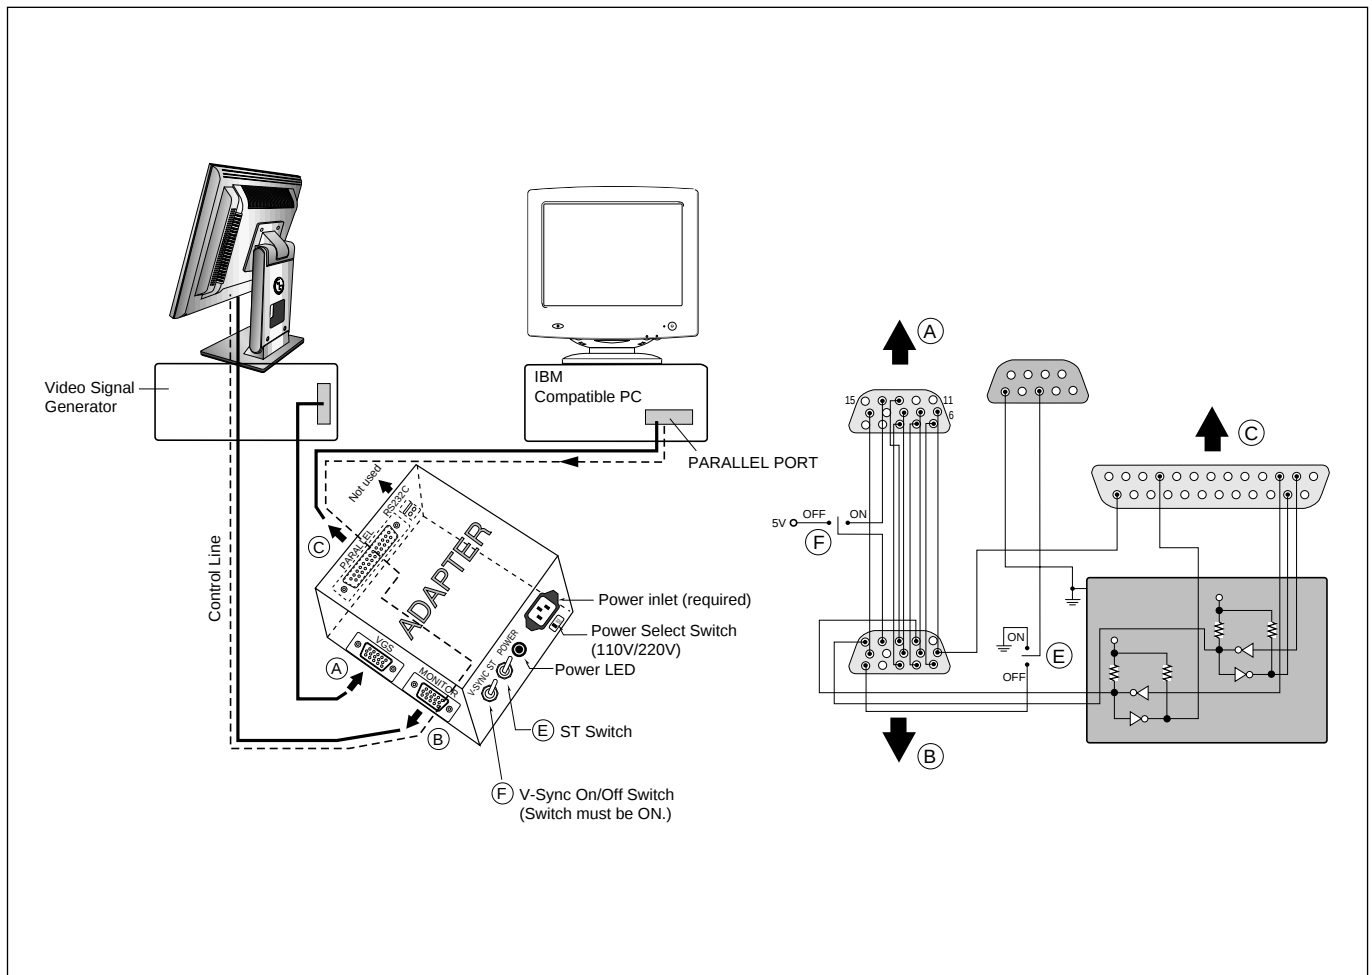



Figure 1. Cable Connection

TROUBLESHOOTING GUIDE


1. NO POWER

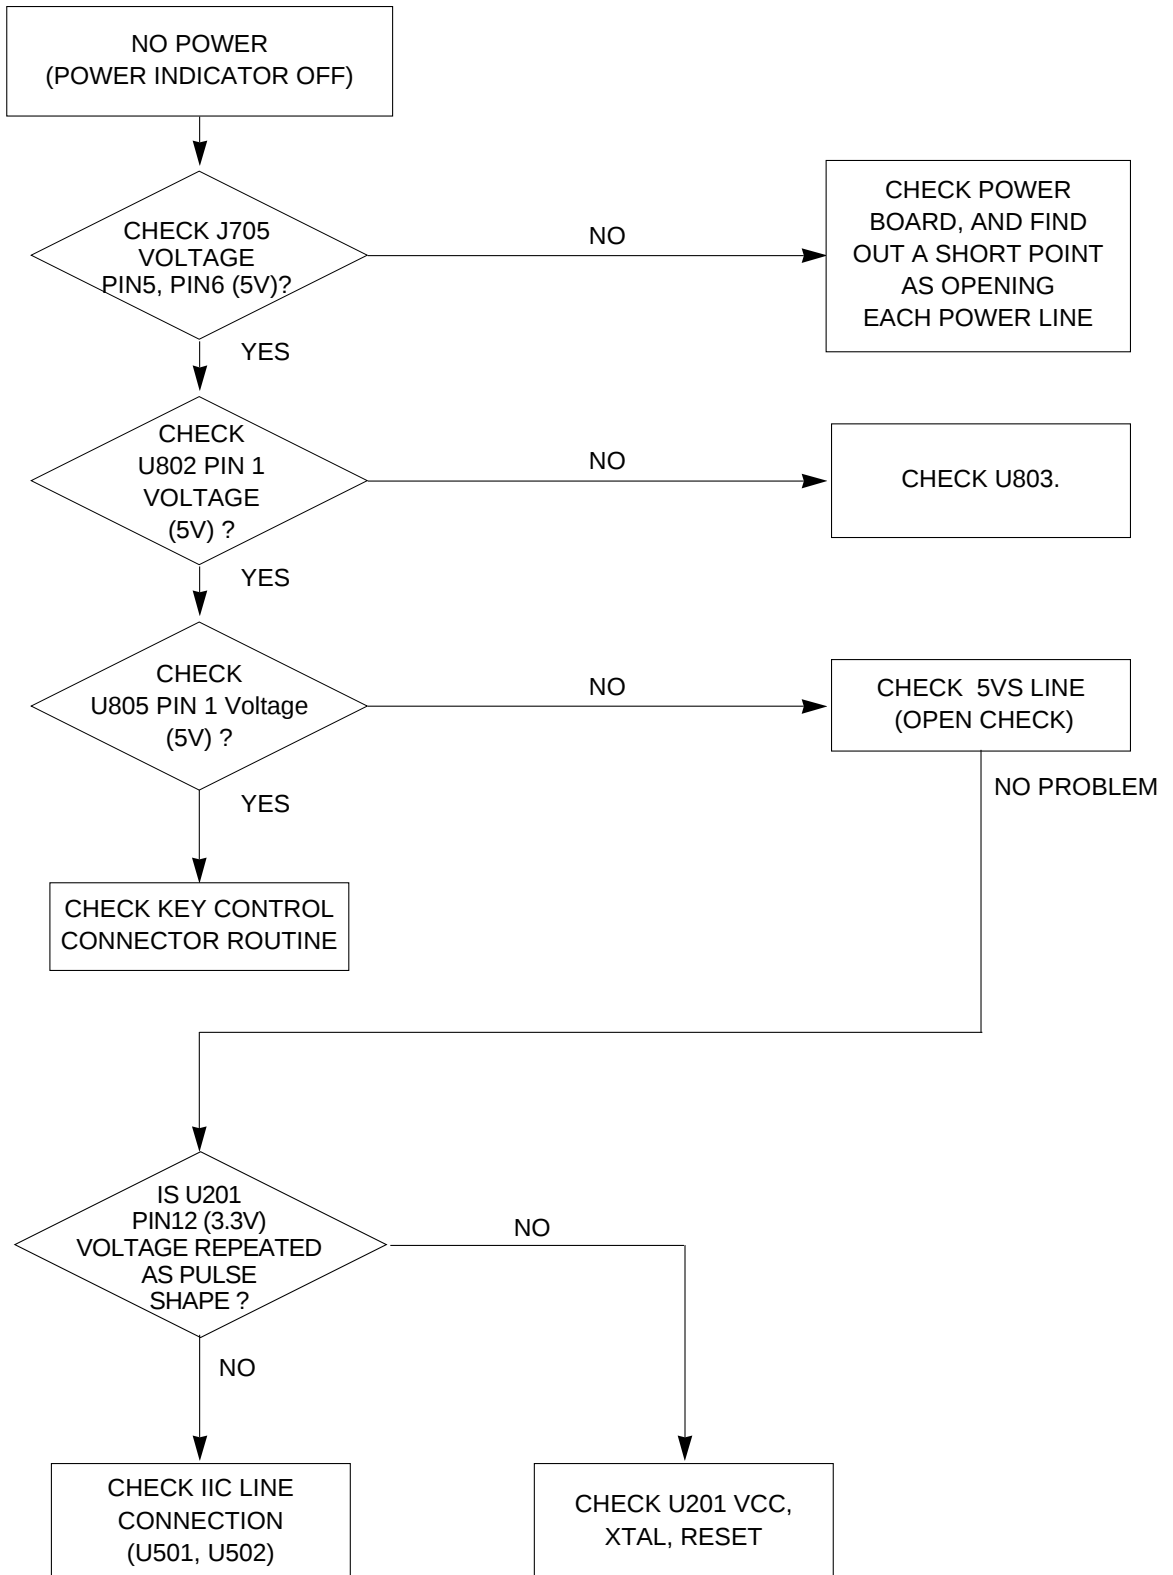


2. NO RASTER (OSD IS NOT DISPLAYED) – LIPS

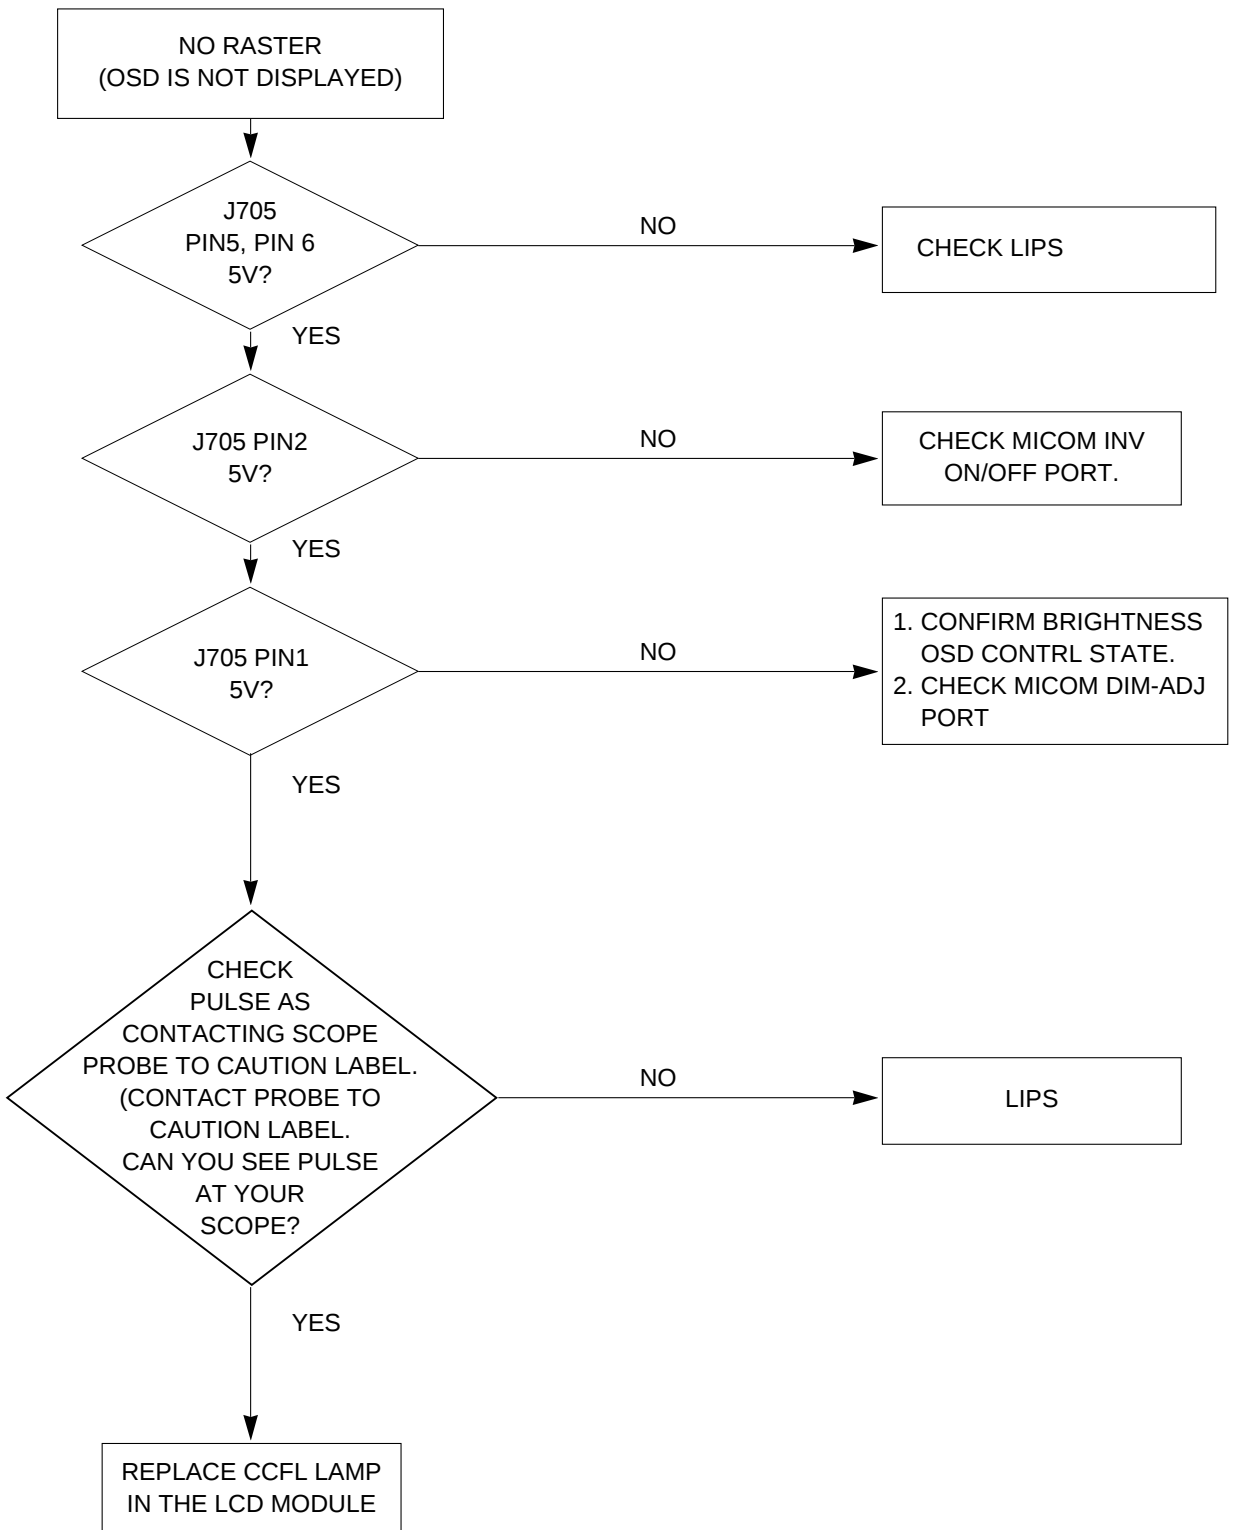


3. NO RASTER (OSD IS NOT DISPLAYED) – gmZAN2

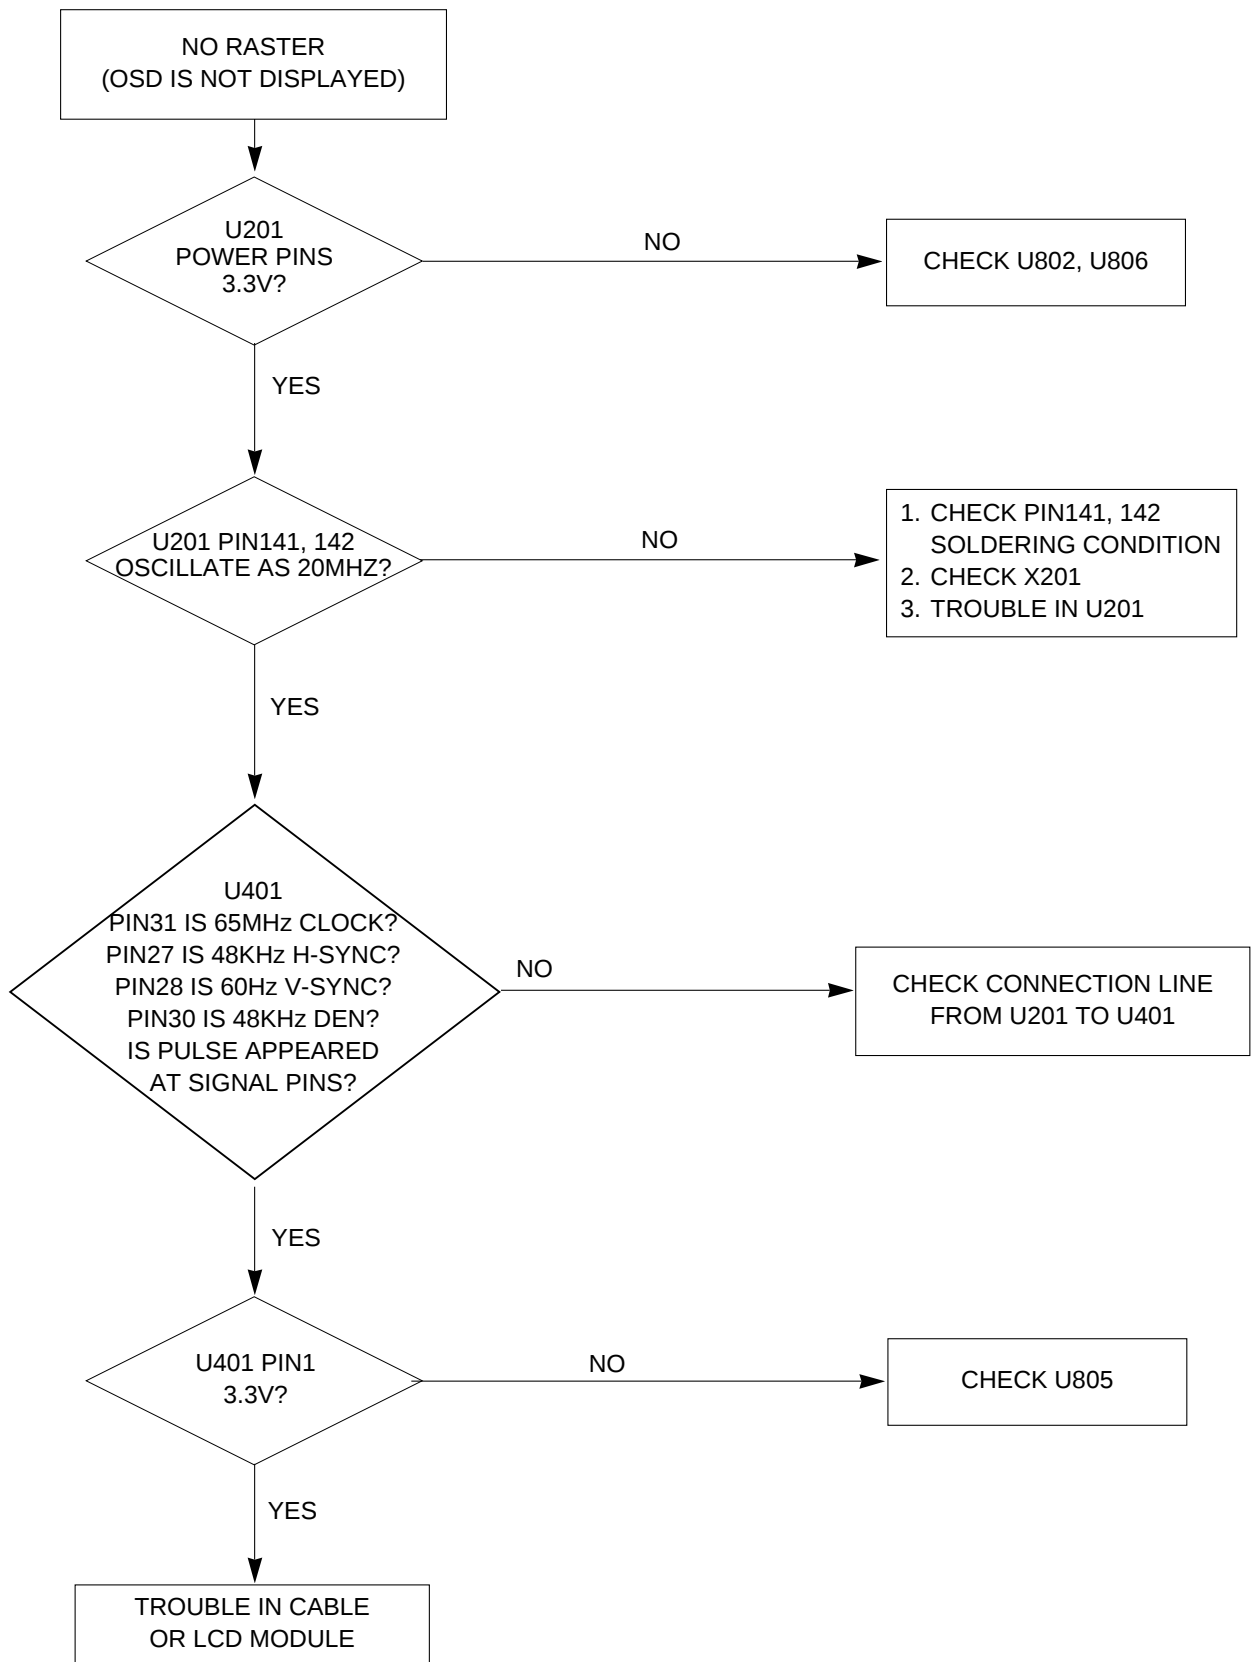


4. NO RASTER (OSD IS DISPLAYED) – gmZAN2

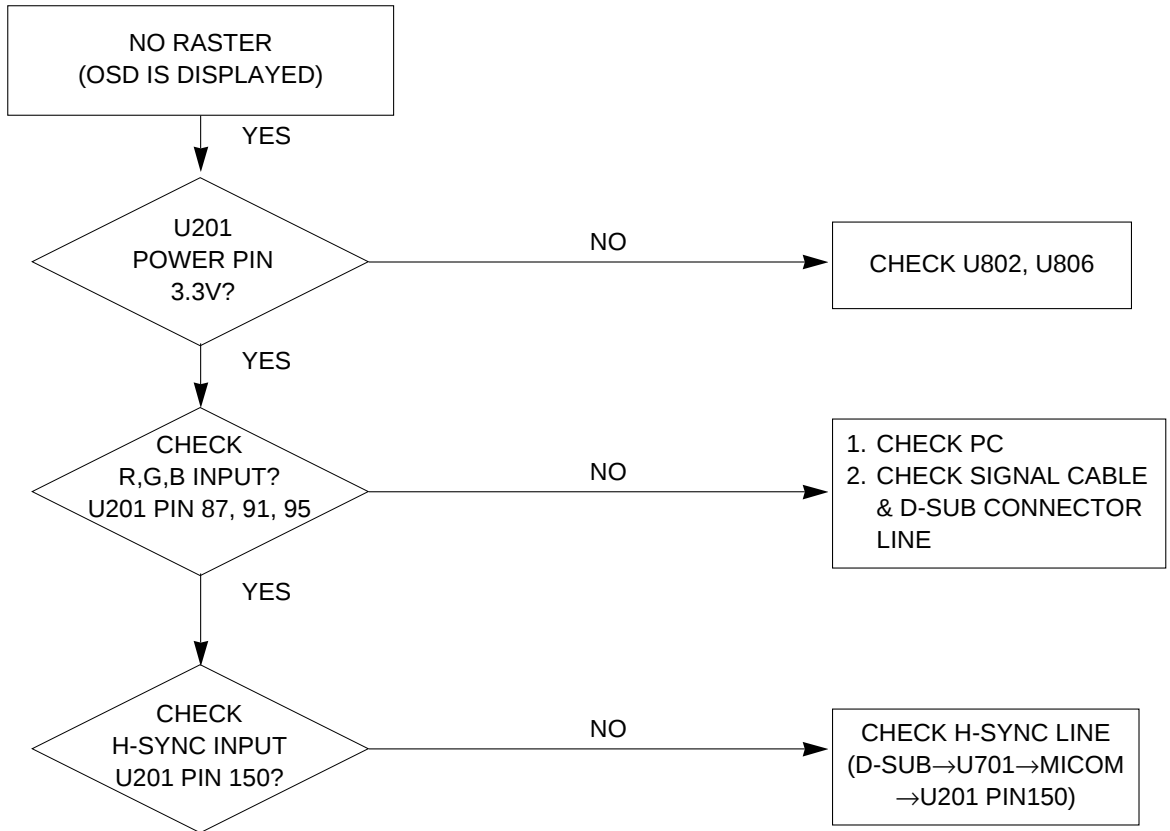


1. MAIN BOARD (Component Side)

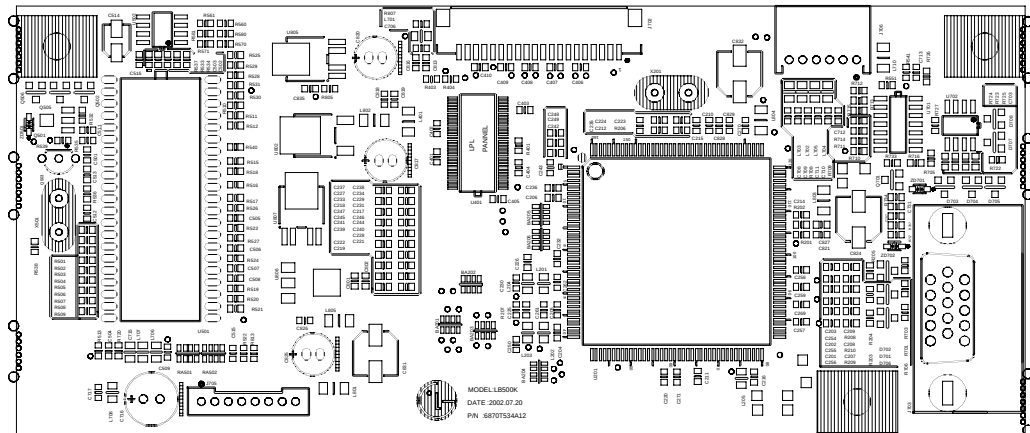

2.CONTROL BOARD (Component Side)



EXPLODED VIEW

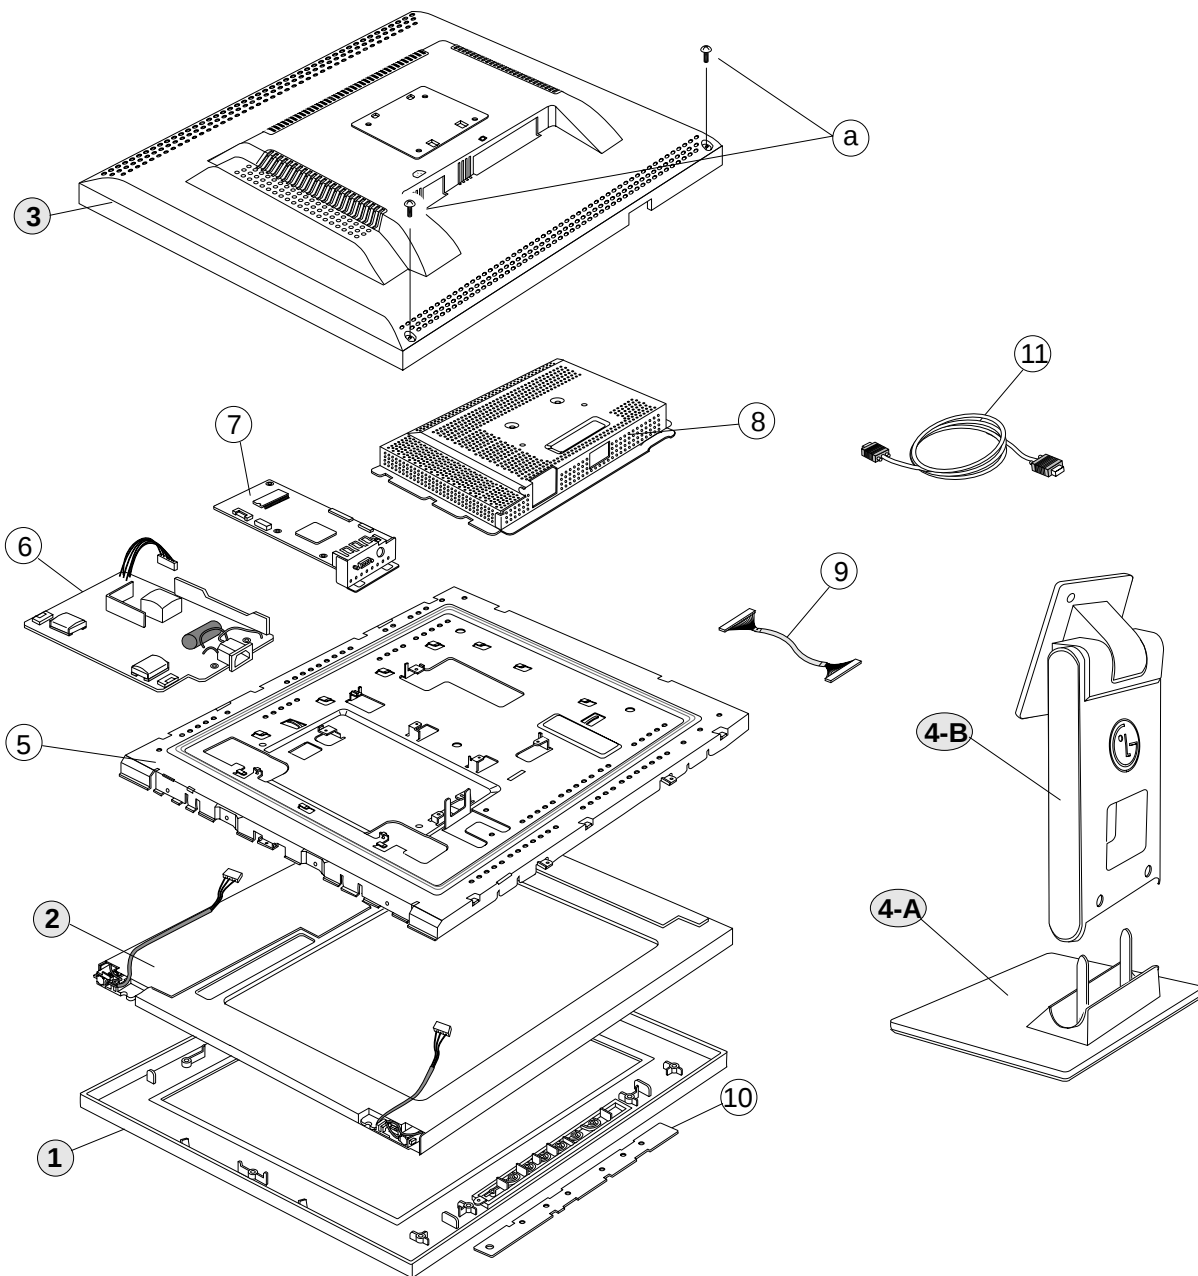

EXPLODED VIEW PARTS LIST

Ref. No.	Part No.	Description
1	3091TKL043Q	CABINET ASSEMBLY, LB501K BRAND 3090TKL040A PC+ABS
2	6304FLP025A	LCD(LIQUID CRYSTAL DISPLAY) LM150X06-A3M1 LG PHILPS TFT COLOR 15.0 INCH XGA
	or 6304FLP024A	LCD(LIQUID CRYSTAL DISPLAY) LM150X07-B4 LG PHILPS TFT COLOR 15.0 INCH XGA
3	3809TKL026L	BACK COVER ASSEMBLY, LB500J 029A PC+ABS
4-A	3043TKK097A	TILT SWIVEL ASSEMBLY LB500J . (BASE)
4-B	3043TKK092A	TILT SWIVEL ASSEMBLY LB500J
5	4951TKS091A	METAL ASSEMBLY, FRAME MAIN(LB500K,LPL MODULE)
6	6634B00051A	ADAPTER, AC-DC, PWI1502LG 5V/12A 1A/1A LIPS FOR K-CHASSIS
	6634B00053A	ADAPTER, AC-DC, ADP-30EP 5V/12A 1A/1A LIPS FOR K-CHASSIS
7	3313TL5054A	MAIN TOTAL ASSEMBLY LB500K LPL BRAND CL-32
8	4950TKK424A	METAL REAR LB500J
9	6631T11016C	CONNECTOR ASSEMBLY, 20P H-H 100MM UL20276 I/FACE CABLE LB500K
10	6871TST310A	PWB(PCB) ASSEMBLY,SUB, LB500K CONTROL TOTAL BRAND CL-32
11	6850TD9004A	CABLE,D-SUB, UL 2990-9C(5.5) DT 1870MM GRAY(85964) LB500K DM
	or 6850TD9001A	CABLE,D-SUB, UL 2990-9C(7.5) DT 1870MM GRAY(85964) BRAND DM
a	332-068U	SCREW, PPB+3*8 (MSWR/FZMW1)

REPLACEMENT PARTS LIST

CAUTION: BEFORE REPLACING ANY OF THESE COMPONENTS,
READ CAREFULLY THE **SAFETY PRECAUTIONS** IN THIS MANUAL.

* NOTE : **S** SAFETY Mark 
AL ALTERNATIVE PARTS


DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
MAIN BOARD				
CAPACITORS				
		C201	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C202	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C203	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C204	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C205	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C206	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C207	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C208	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C209	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C210	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C211	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C212	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C214	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C215	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C216	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C217	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C218	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C219	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C221	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C222	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C223	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C224	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C226	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C227	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C228	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C229	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C230	0CC080CK11A	8PF 1608 50V 0.5 PF R/TP NP0
		C231	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C233	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C234	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C237	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C238	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C239	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C240	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C241	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C242	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C243	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C244	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C245	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C246	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C247	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C248	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C249	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C254	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C255	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C256	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C257	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C258	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C259	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C261	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C262	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C269	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P

DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C270	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C271	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C401	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C402	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C403	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C404	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C405	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C501	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C502	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C503	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C504	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C505	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C506	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C507	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C508	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C509	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C512	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C513	0CC180CK41A	18PF 1608 50V 5% R/TP NP0
		C514	0CH8106F611	10UF 16V M 85STD(CYL) R/TP
		C515	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C516	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C703	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C706	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C707	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C712	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C713	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C715	0CH3105F946	1UF 16V Z F 2012 R/TP
		C731	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C801	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C802	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C813	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C816	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C817	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C818	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C819	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C820	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C821	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C824	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C825	0CE107CF610	100UF SHL,SD 16V 20% BULK FL
		C826	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C827	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C828	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C829	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(Y5P
		C831	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C832	0CH8107F611	100UF 16V M 85STD(CYL) R/TP
		C835	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
DIODES				
		D701	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D702	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D703	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D704	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M
		D705	0DS226009AA	KDS226 TP KEC SOT-23 80V 300M

DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		D706 D707 D708 ZD701 ZD702	0DS226009AA 0DS301109AA 0DS301109AA 0DZ560009GB 0DZ560009GB	KDS226 TP KEC SOT-23 80V 300M MMBD301LT1 TP MOTOROLA SOT23 3 MMBD301LT1 TP MOTOROLA SOT23 3 BZT52C5V6S DIODES R/TP SOD323 BZT52C5V6S DIODES R/TP SOD323
ICs				
		U201 U401 U501 U502 U701 U702 U802 U805 U806	0IPRPGA002A 0ITH638300B 0IZZTSZ199A 0ISG240860B 0IMO741420B 0ICS240213A 0IPMGKE011A 0IRH033000A 0IPMGON007A	GMZAN2-160P GENESIS MICROCHIP THC63LVDM83R THINE 56P,TSSOP R MYSON 42PIN BK OTP LB500K M24C08W6 SGS-THOMSON 8SOP R/TP MC74HCT14ADR2 14P,SOIC TP LEVE CAT24WC02J-TE13 8P SOP TP 2K I KIA78D33F KEC DPAK R/TP 3.3V L BA033SFP P/MOLD-5 TP REGULATOR NCP1117ST25T3 ON SEMI SOT223 R
COILS & CORES				
		L201 L202 L203 L204 L205 L401 L701 L702 L703 L704 L705 L706 L707 L710 L801 L802 L803 L804 L805	6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001G 6210TCE001S 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001P 6210TCE001G 6210TCE001G 6210TCE001G 6210TCE001G 6210TCE001G 6210TCE001G	HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HH-1M3216-501 CERATEC 3216MM R HU-1M2012-121 CERATECH 2012MM HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HB-1S2012-121JT CERATECH 2012M HH-1M3216-501 CERATEC 3216MM R HH-1M3216-501 CERATEC 3216MM R HH-1M3216-501 CERATEC 3216MM R HH-1M3216-501 CERATEC 3216MM R HH-1M3216-501 CERATEC 3216MM R HH-1M3216-501 CERATEC 3216MM R
TRANSISTOR				
		Q502 Q503 Q701	0TR390409AE 0IKE704200H 0TR390409AE	FAIRCHILD KST3904(LGEMTF) TP S KIA7042AP TO-92 TP 4.2 VOLT. FAIRCHILD KST3904(LGEMTF) TP S
RESISTORS				
		R201 R202 R203 R204 R205 R206 R207 R208 R209 R210 R401 R403 R404 R501	0RJ4701D677 0RJ4701D677 0RJ1000D677 0RJ1000D677 0RJ1000D677 0RJ2701D677 0RJ0472D677 0RJ1000D677 0RJ1000D677 0RJ1000D677 0RJ1000D677 0RJ1002D677 0RJ1001D677 0RJ5601D477 0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 2.7K OHM 1/10 W 5% 1608 R/TP 47 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 1K OHM 1/10 W 5% 1608 R/TP 5.6K OHM 1/10 W 1% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP


DATE: 2002. 8. 29.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R502 R503 R504 R505 R506 R507 R508 R509 R510 R511 R512 R513 R515 R516 R517 R518 R519 R520 R521 R522 R523 R524 R525 R526 R527 R528 R529 R530 R531 R532 R533 R534 R535 R536 R537 R540 R541 R551 R561 R571 R581 R701 R703 R705 R706 R707 R708 R709 R711 R712 R713 R714 R715 R716 R717 R722 R723 R724 R725 R726 R727 R733	0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ1002D677 0RJ4701D677 0RJ1002D677 0RJ1002D677 0RJ4701D677 0RJ1000D677 0RJ4701D677 0RJ4701D677 0RJ1002D677 0RJ1000D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ1500D677 0RJ0332D677 0RJ0332D677 0RJ1000D677 0RJ4701D677 0RJ1000D677 0RJ1000D677 0RJ3301D677 0RJ0332D677 0RJ0332D677 0RJ3301D677 0RJ1004D677 0RJ4701D677 0RJ1002D677 0RJ1000D677 0RJ0000D677 0RJ0000D677 0RJ0000D677 0RJ0000D677 0RJ0752D677 0RJ0752D677 0RJ4700D677 0RJ0752D677 0RJ0272D677 0RJ1500D677 0RJ1500D677 0RJ0000D677 0RJ1000D677 0RJ1000D677 0RJ1000D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ1001D677 0RJ0332D677 0RJ0332D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ1001D677 0RJ0332D677 0RJ0332D677 0RJ4701D677 0RJ4701D677 0RJ4701D677 0RJ1501D677	4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 150 OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 3.3K OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 3.3K OHM 1/10 W 5% 1608 R/TP 1000000 OHM 1/10 W 5% 1608 R/T 4.7K OHM 1/10 W 5% 1608 R/TP 10K OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 0 OHM 1/10 W 5% 1608 R/TP 0 OHM 1/10 W 5% 1608 R/TP 0 OHM 1/10 W 5% 1608 R/TP 0 OHM 1/10 W 5% 1608 R/TP 75 OHM 1/10 W 5% 1608 R/TP 75 OHM 1/10 W 5% 1608 R/TP 470 OHM 1/10 W 5% 1608 R/TP 75 OHM 1/10 W 5% 1608 R/TP 27 OHM 1/10 W 5% 1608 R/TP 150 OHM 1/10 W 5% 1608 R/TP 150 OHM 1/10 W 5% 1608 R/TP 0 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 100 OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 1K OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 33 OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 4.7K OHM 1/10 W 5% 1608 R/TP 1.5K OHM 1/10 W 5% 1608 R/TP

CAT24WC02J-TE13 8P


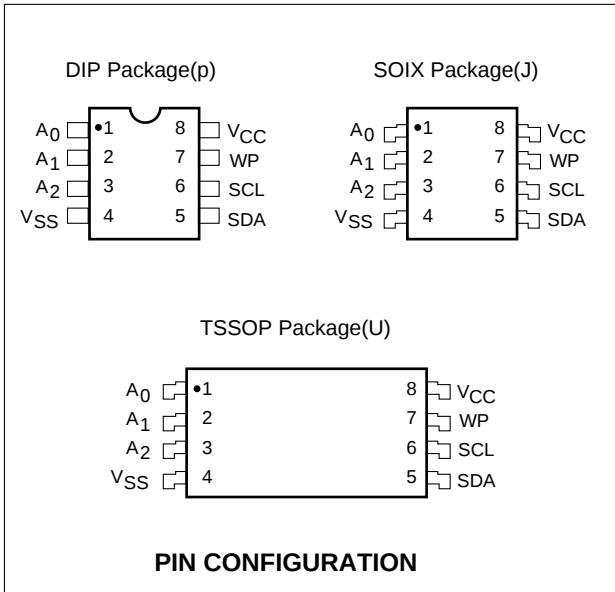


PIN FUNCTION

Pin Name	Function
A0, A1, A2	Device Address Inputs
SDA	Serial Data/Address
SCL	Serial Clock
WP	Write Protect
Vcc	+1.8V to + 6.0V power Supply
Vss	Ground

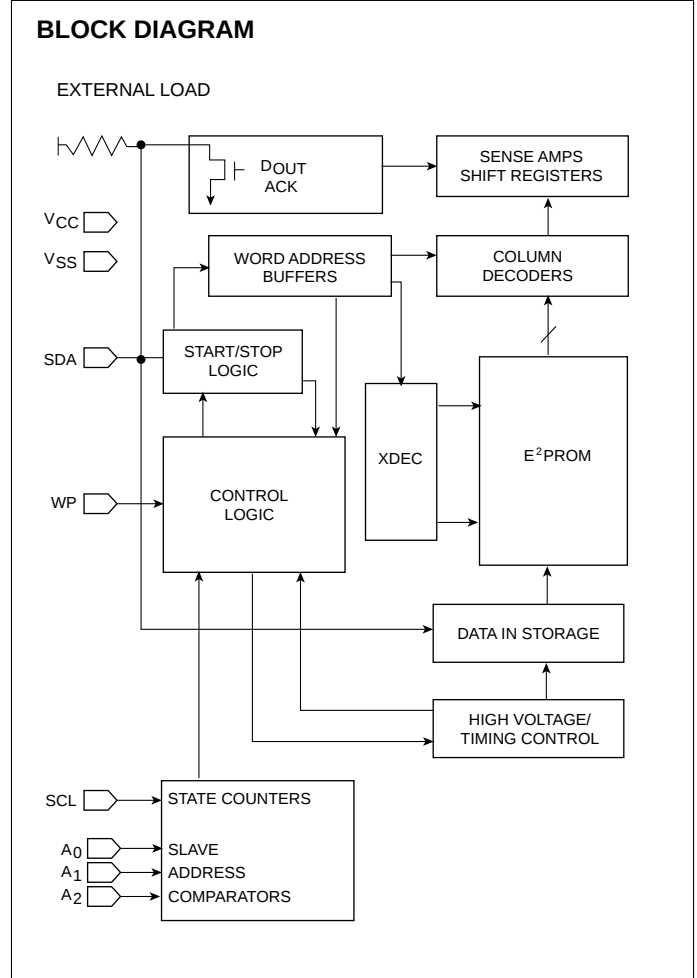

MC74HCT14ADR2 14P

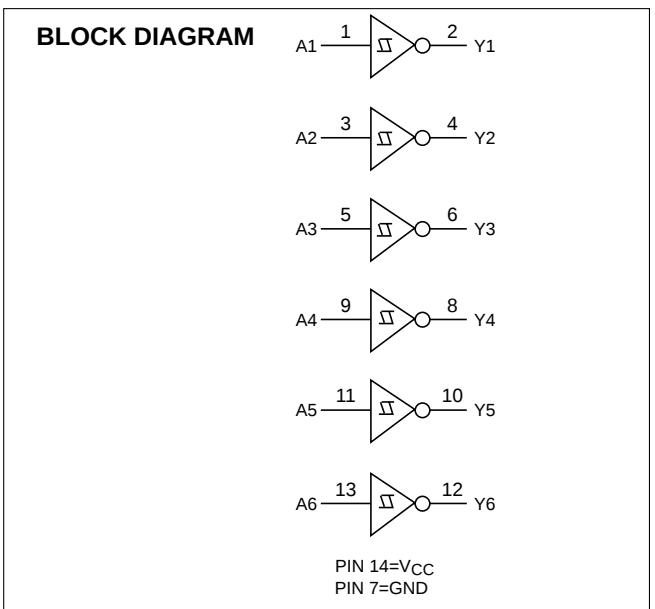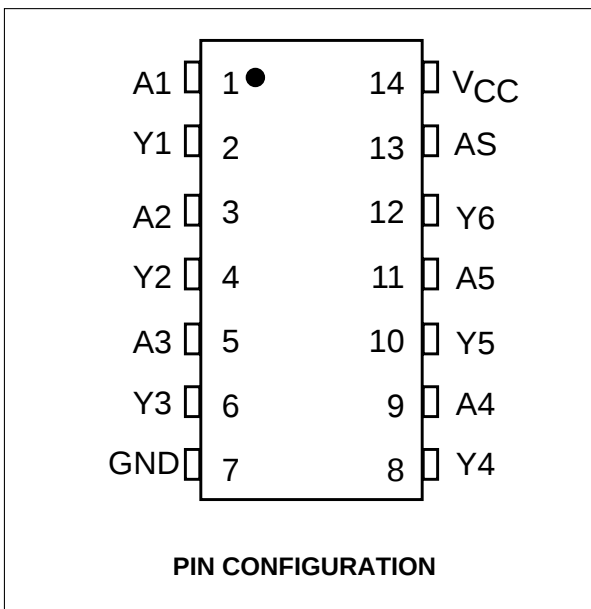


THC63LVDM83R

PIN CONFIGURATION


THC63LVDM83R		
RS	1	56 TA4
TD1	2	55 TA3
TA5	3	54 TA2
TA6	4	53 GND
GND	5	52 TA1
TB0	6	51 TA0
TB1	7	50 TD0
TD2	8	49 LVDS GND
VCC	9	48 TA-
TD3	10	47 TA+
TB2	11	46 TB-
TB3	12	45 TB+
GND	13	44 LVDS VCC
TB4	14	43 LVDS GND
TB5	15	42 TC-
TD4	16	41 TC+
R/F	17	40 TCLK -
TD5	18	39 TCLK+
TB6	19	38 TD-
TC0	20	37 TD+
GND	21	36 LVDS GND
TC1	22	35 PLL GND
TC2	23	34 PLL VCC
TC3	24	33 PLL GND
TD6	25	32 /PDWN
VCC	26	31 CLK IN
TC4	27	30 TC6
TC5	28	29 GND

BLOCK DIAGRAM

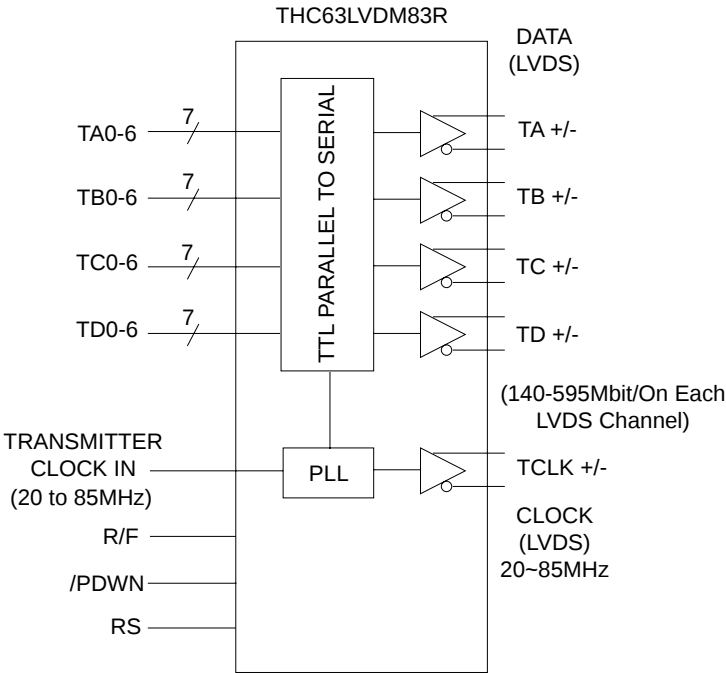


#2 LVDS


2. LVDS

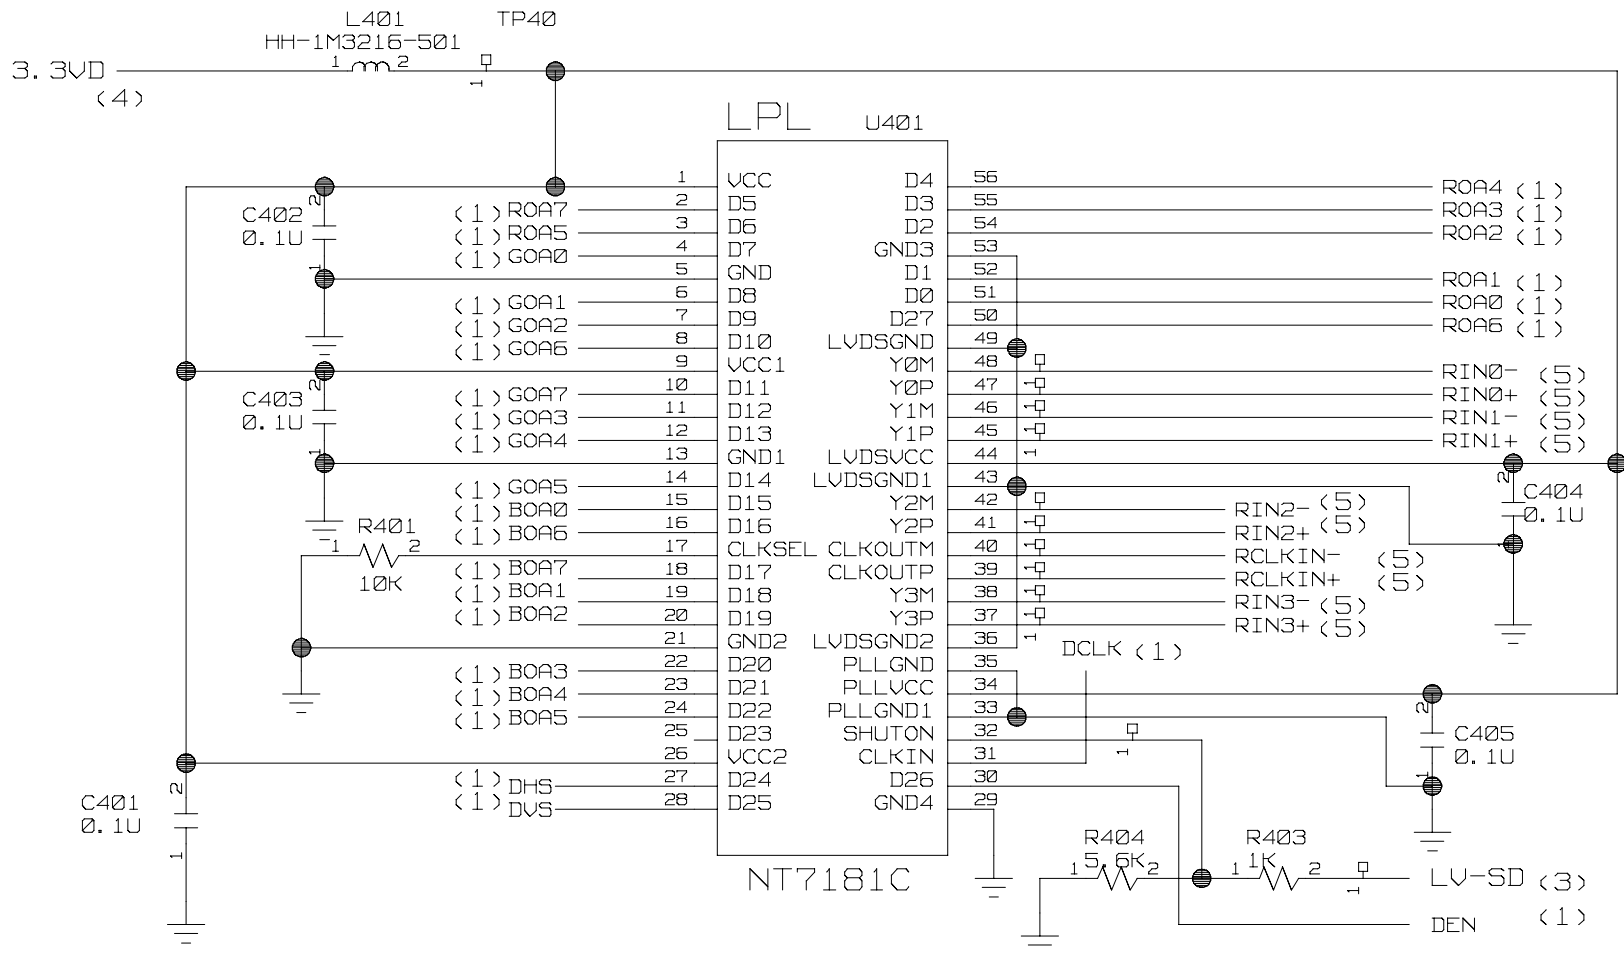

#3 MICOM

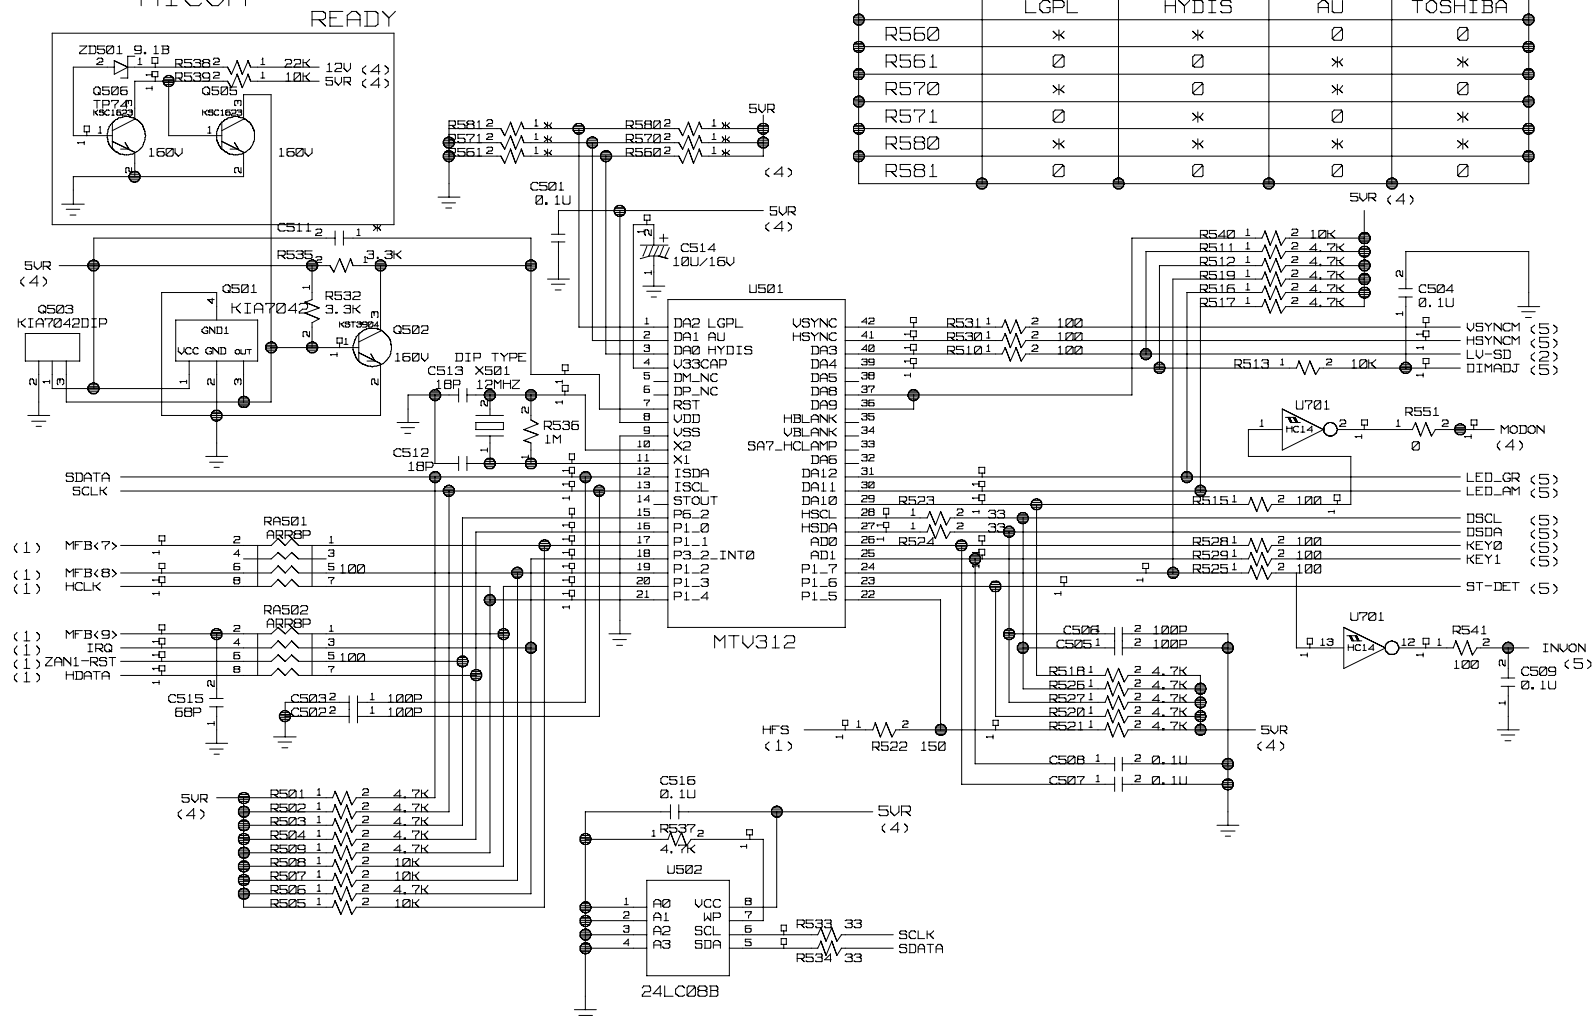

#4 POWER

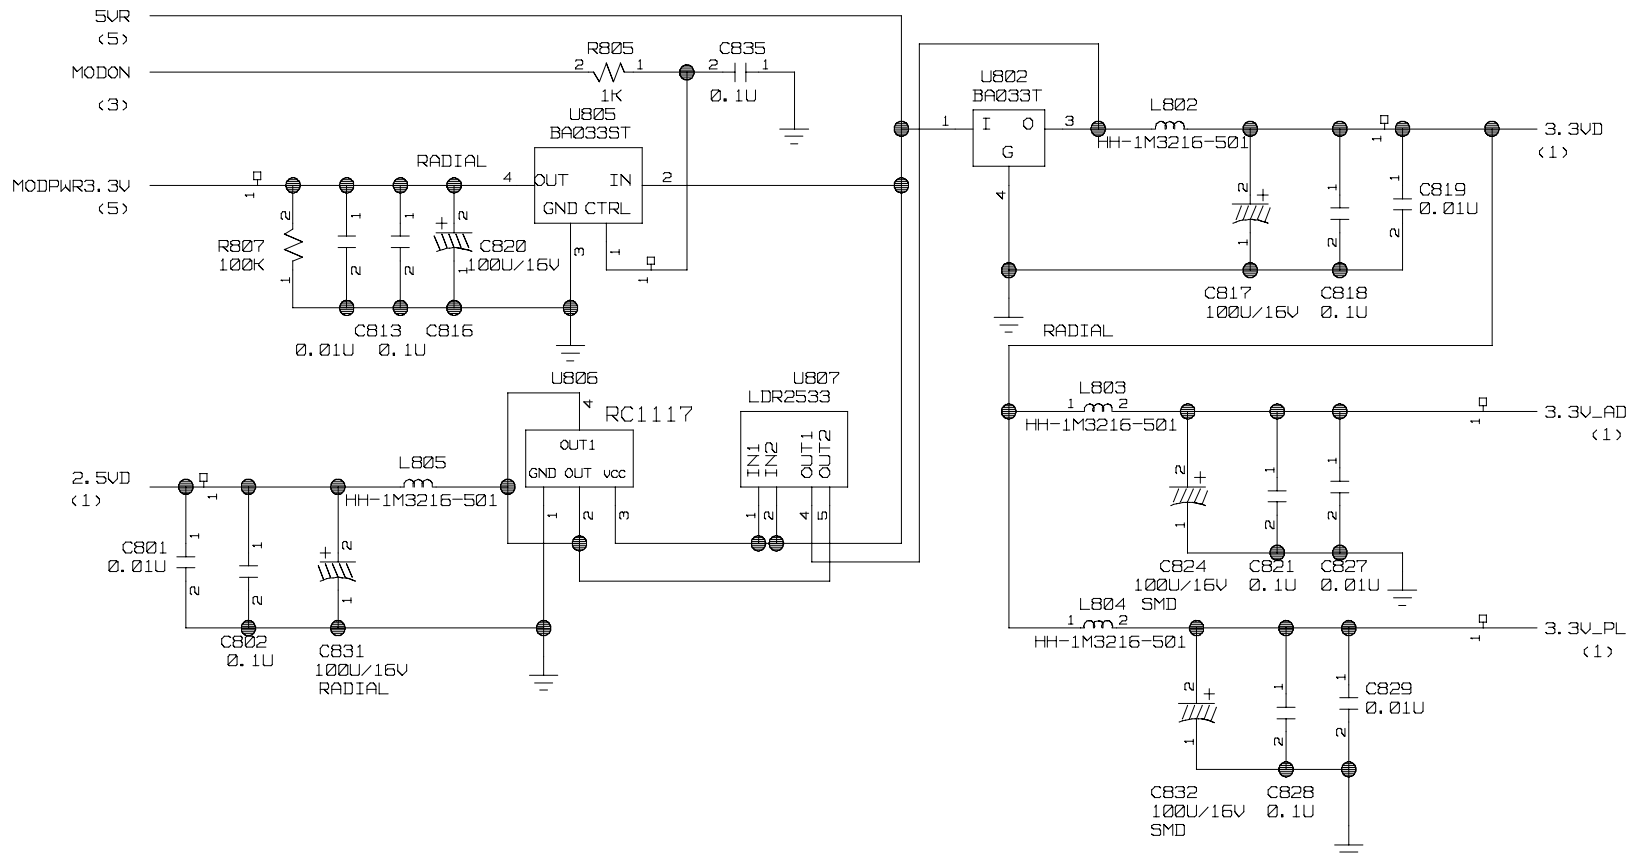

#5 CONNECTOR & JACKS

