
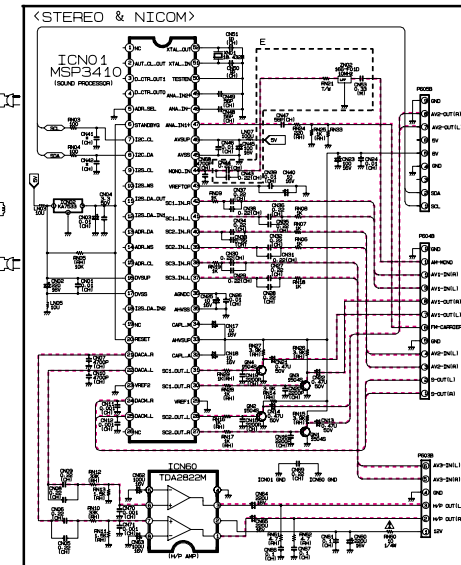


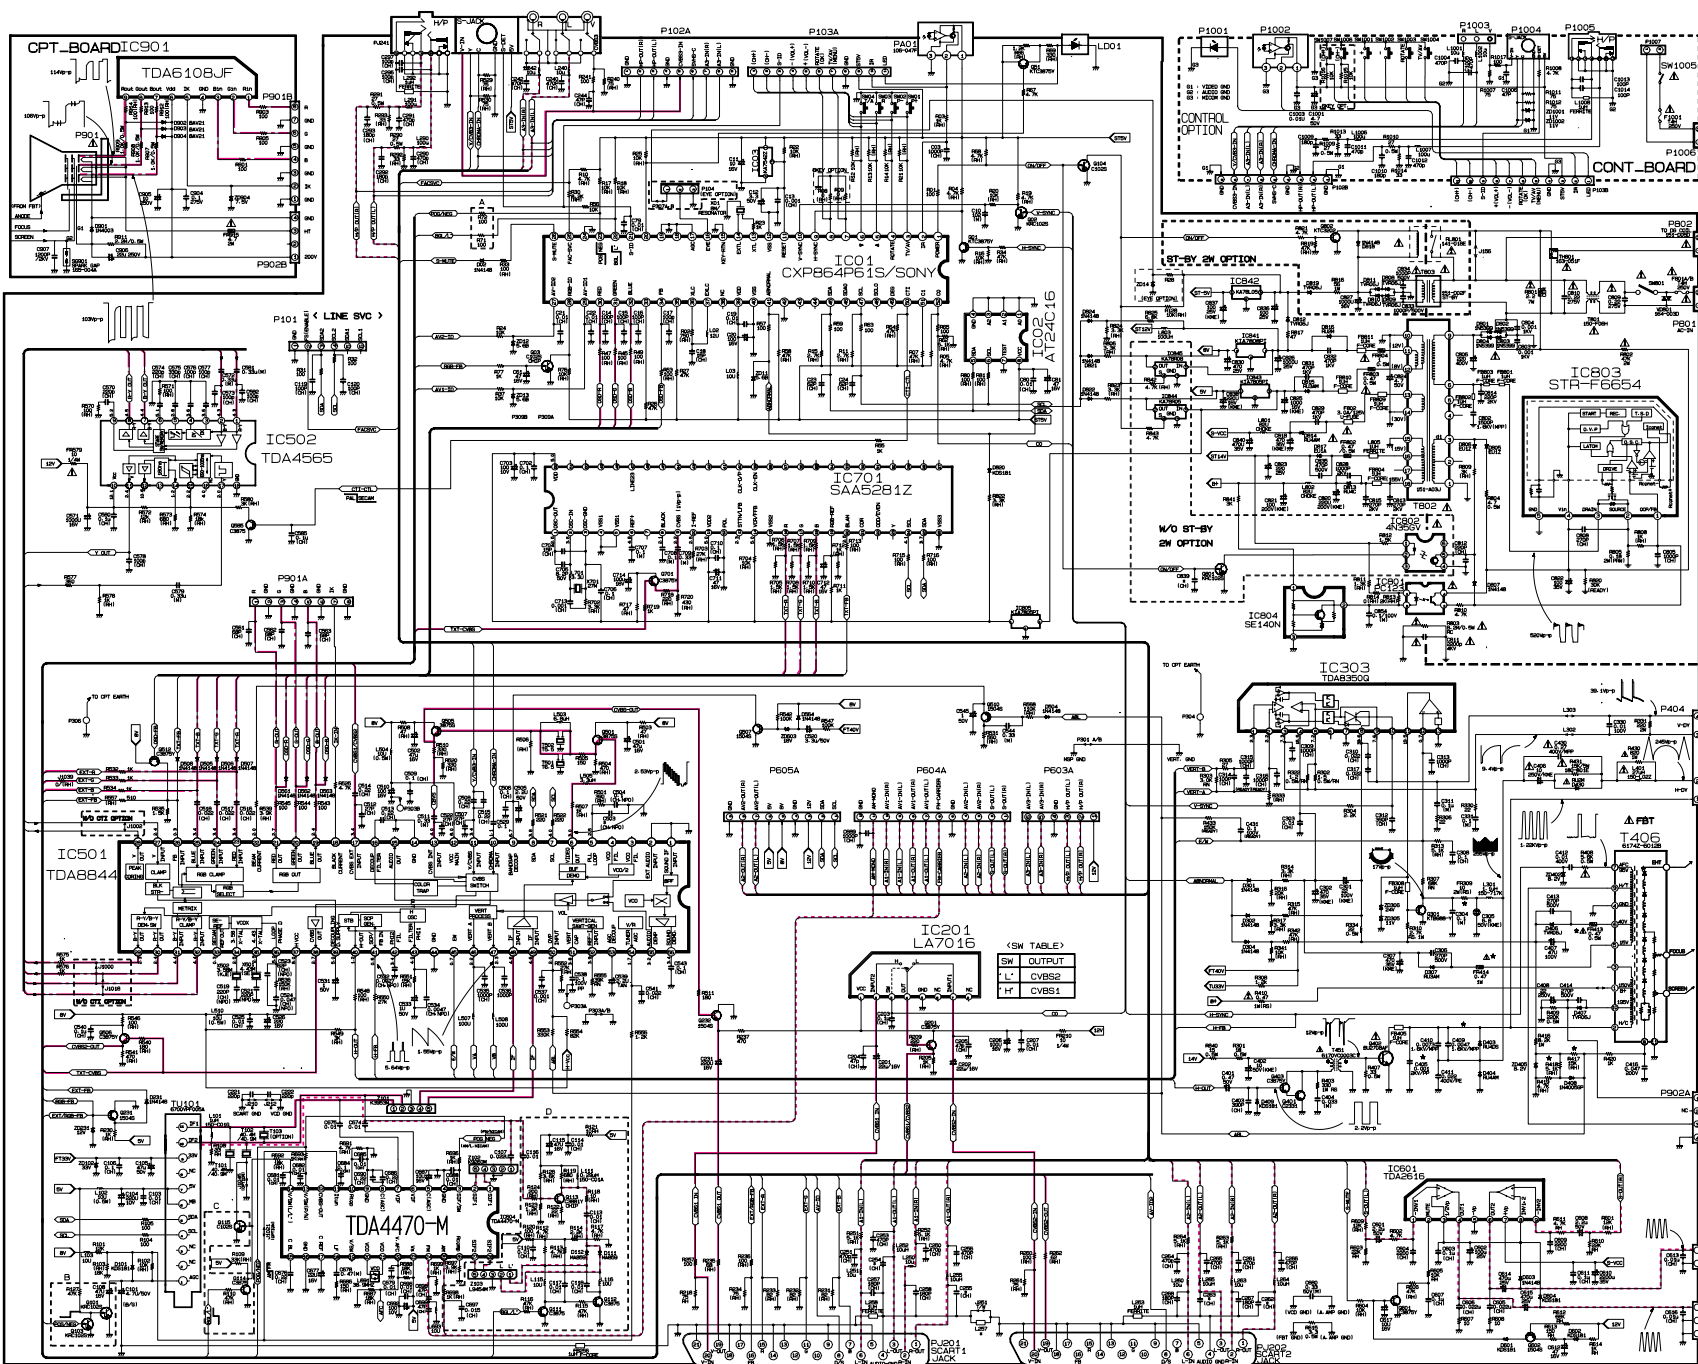

<INCH OPTION>

[illegible]

<SYSTEM OPTION>

[illegible]

NOTICE

The components marked  conform to VDE or IEC guidelines and are essential for safe operation of the TV receiver.

Value of resistor, capacitor and inductor

1. Resistances are shown in ohms. K=1,000. M=1,000,000.
2. Unless otherwise noted in schematic all capacitor values less than 1 are expressed in mfd and the values more than 1 in pf.
3. Unless otherwise noted in schematic all inductor values more than 1 are expressed in uH and the values less than 1 in Henry(H).

Observation of voltages

1. Voltages read with VTVM from point to chassis ground.
line voltage is 230V-250 volts.
signal pattern is colour-bar.
2. The schematic shown is representative only.
3. All waveforms are taken using a wide band oscilloscope and a low capacity probe.
4. CHECK FINE TUNING- AGC- CONTRAST, BRIGHTNESS and COLOUR controls for best picture. make sure that COLOUR and BRIGHTNESS is in mid-point and CONTRAST is in 75%.
5. waveforms are taken using a standard colour signal.

LG CHASSIS PC8KA