







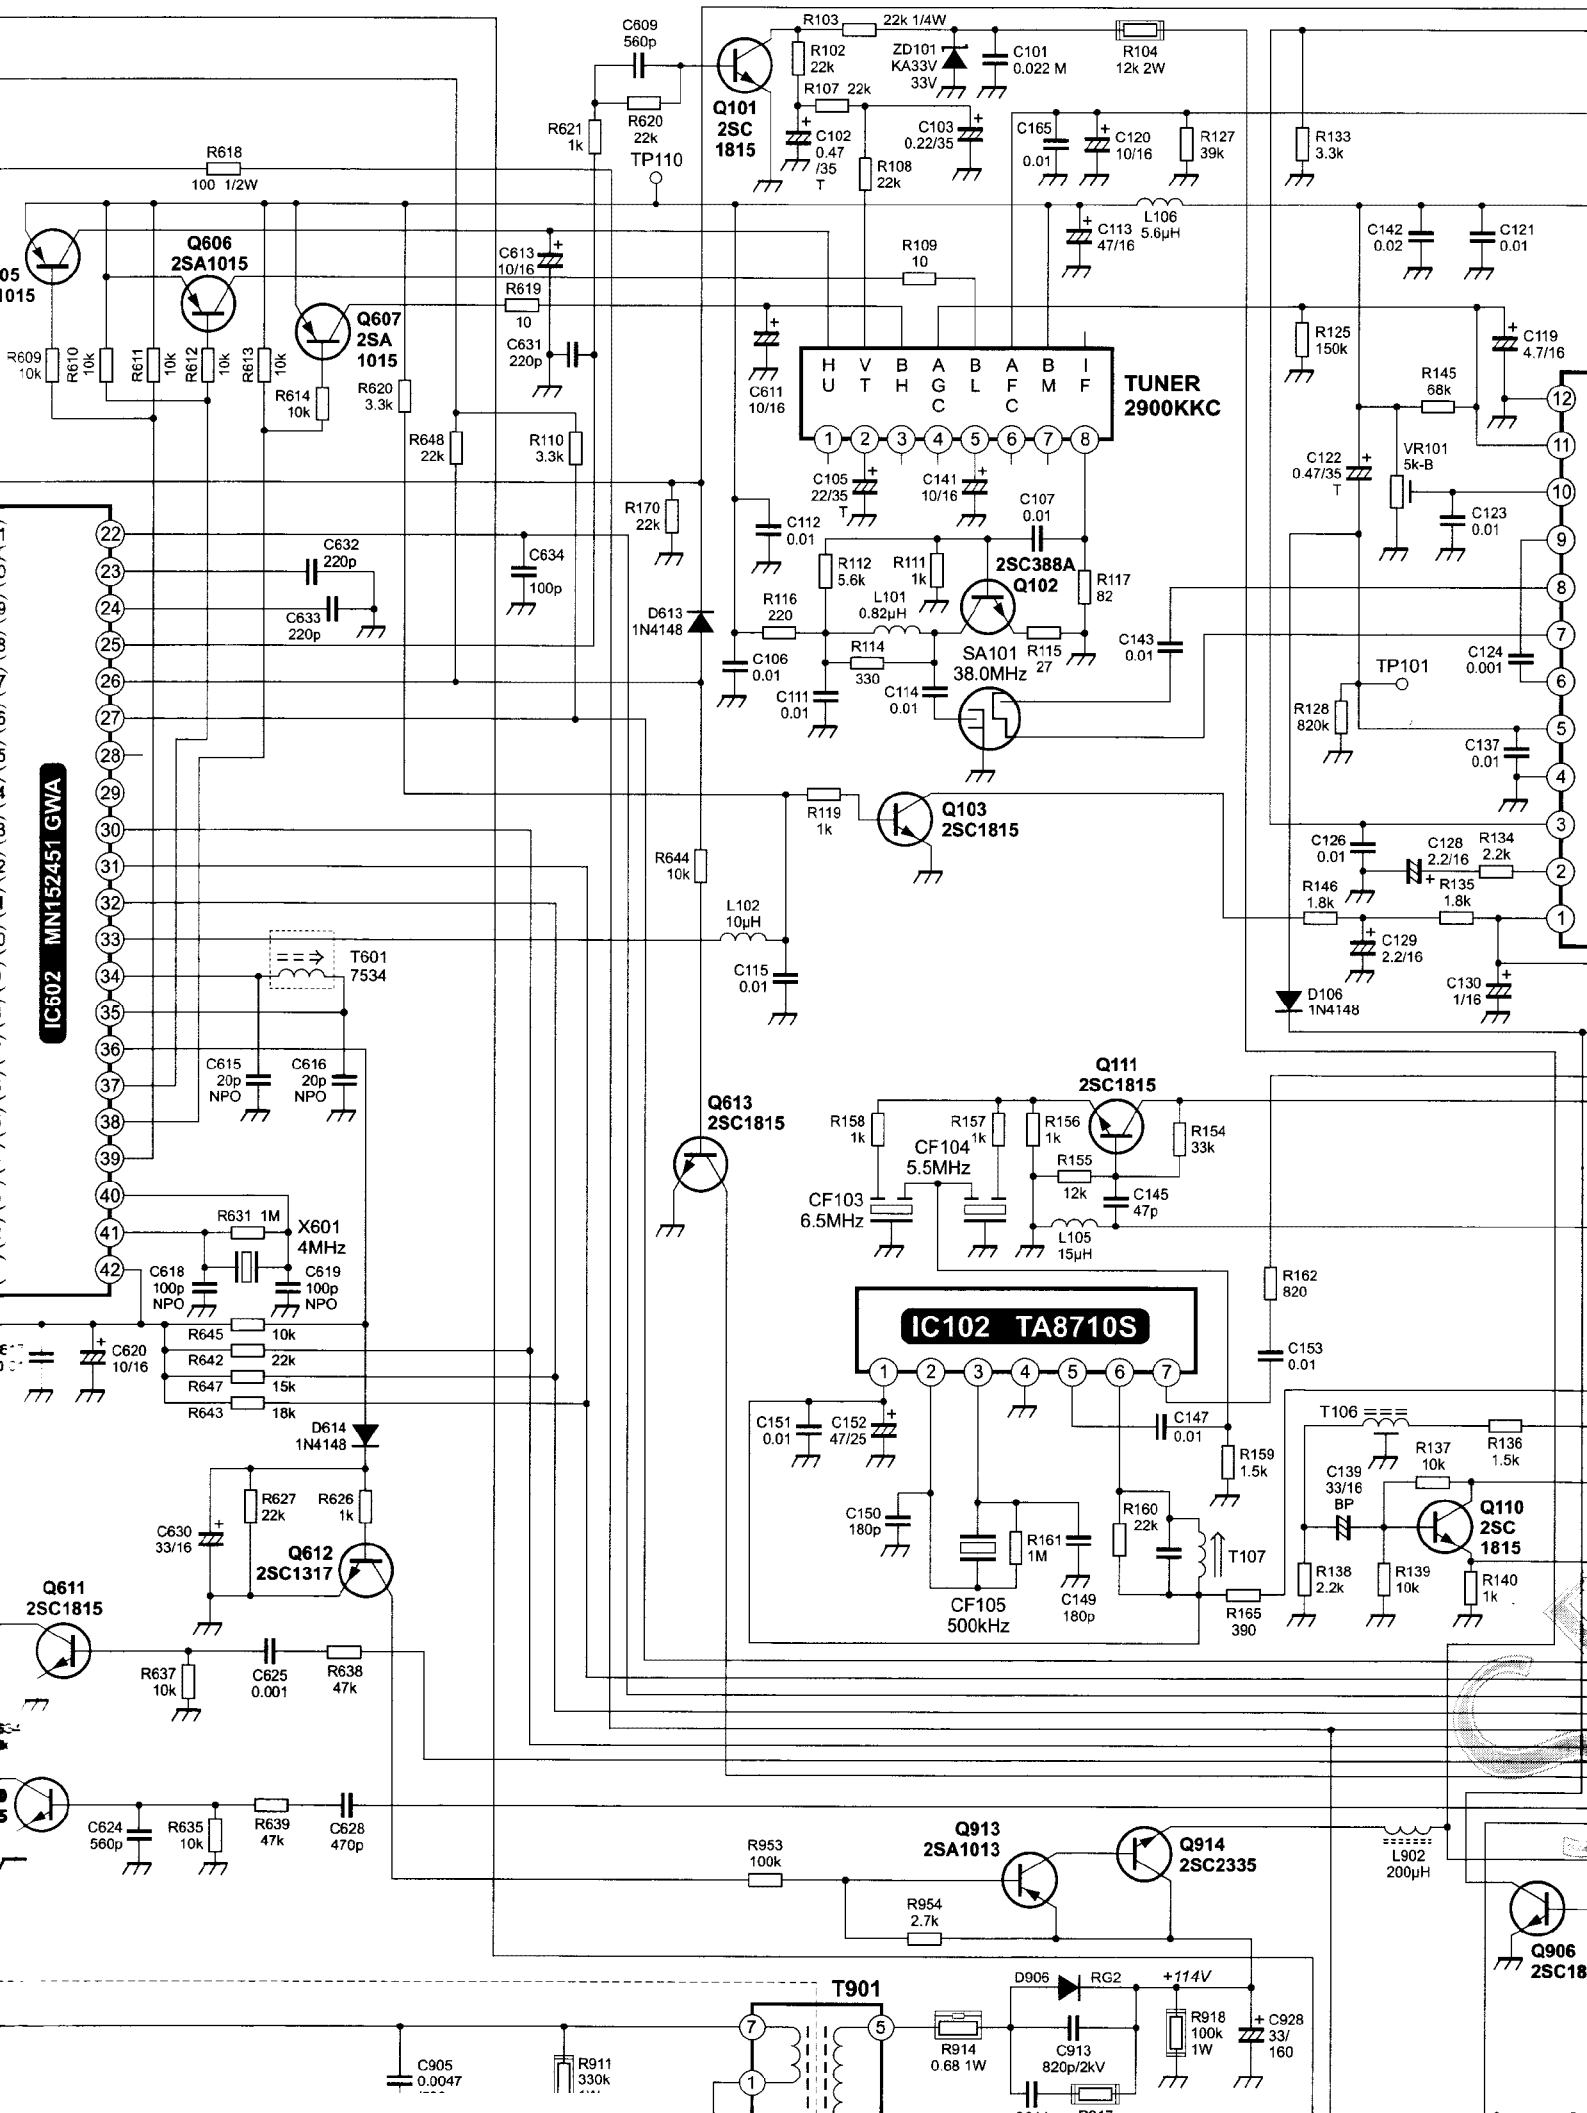


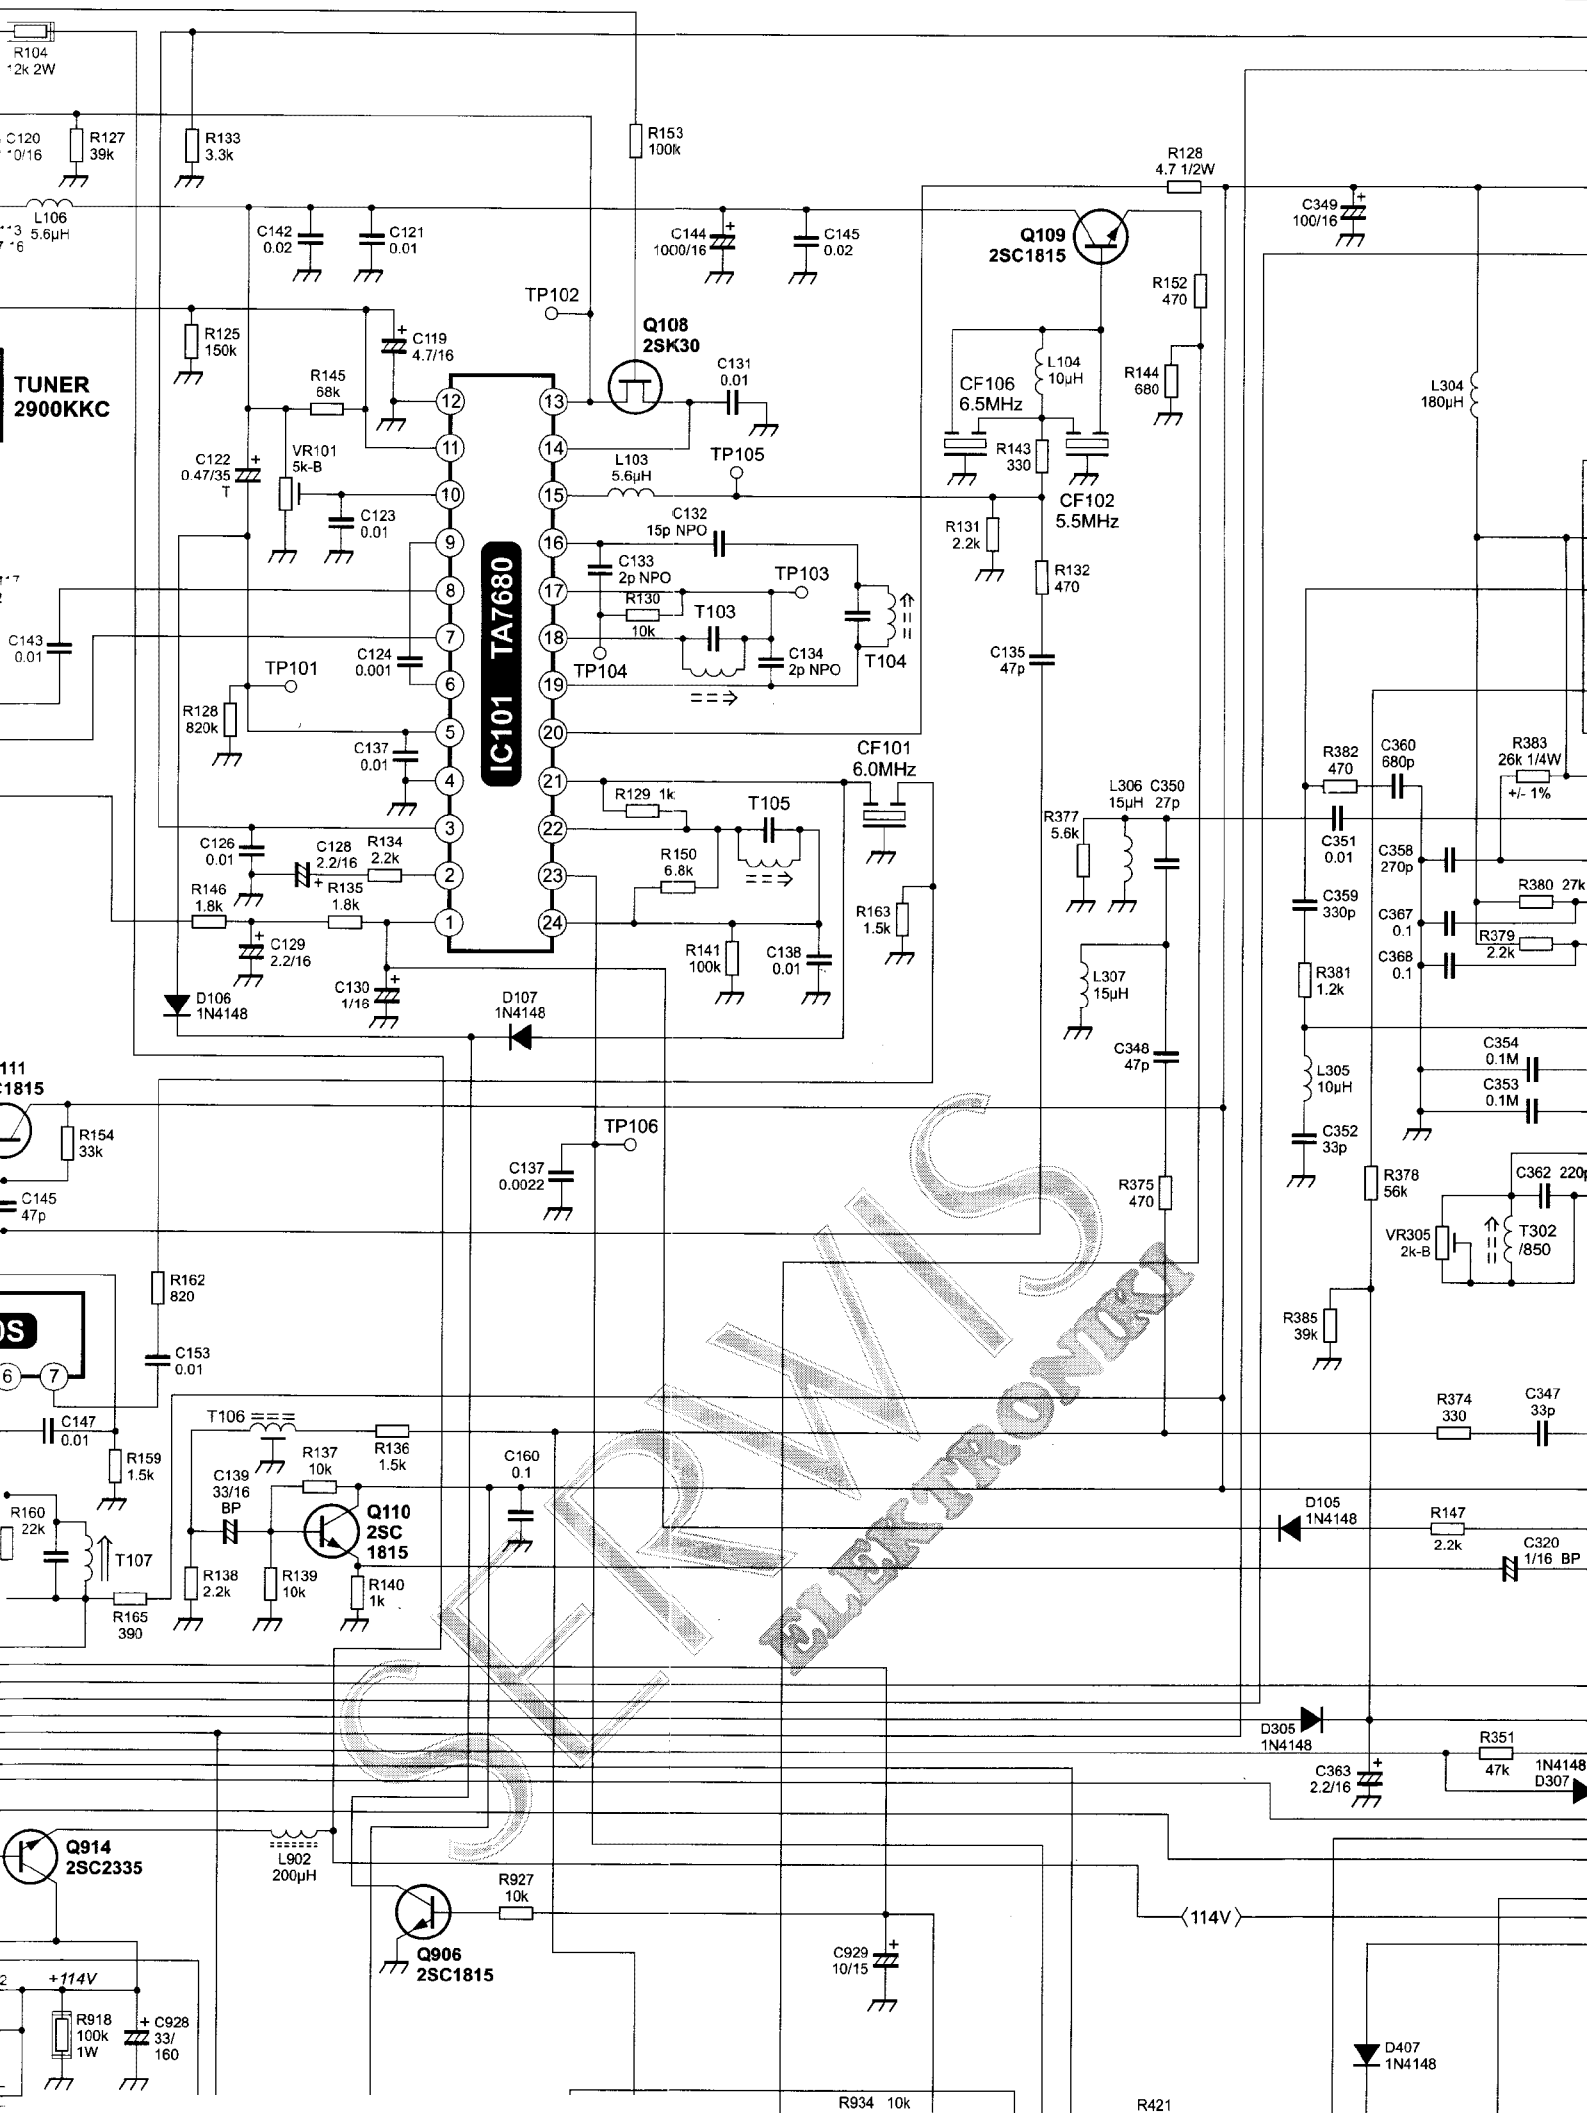


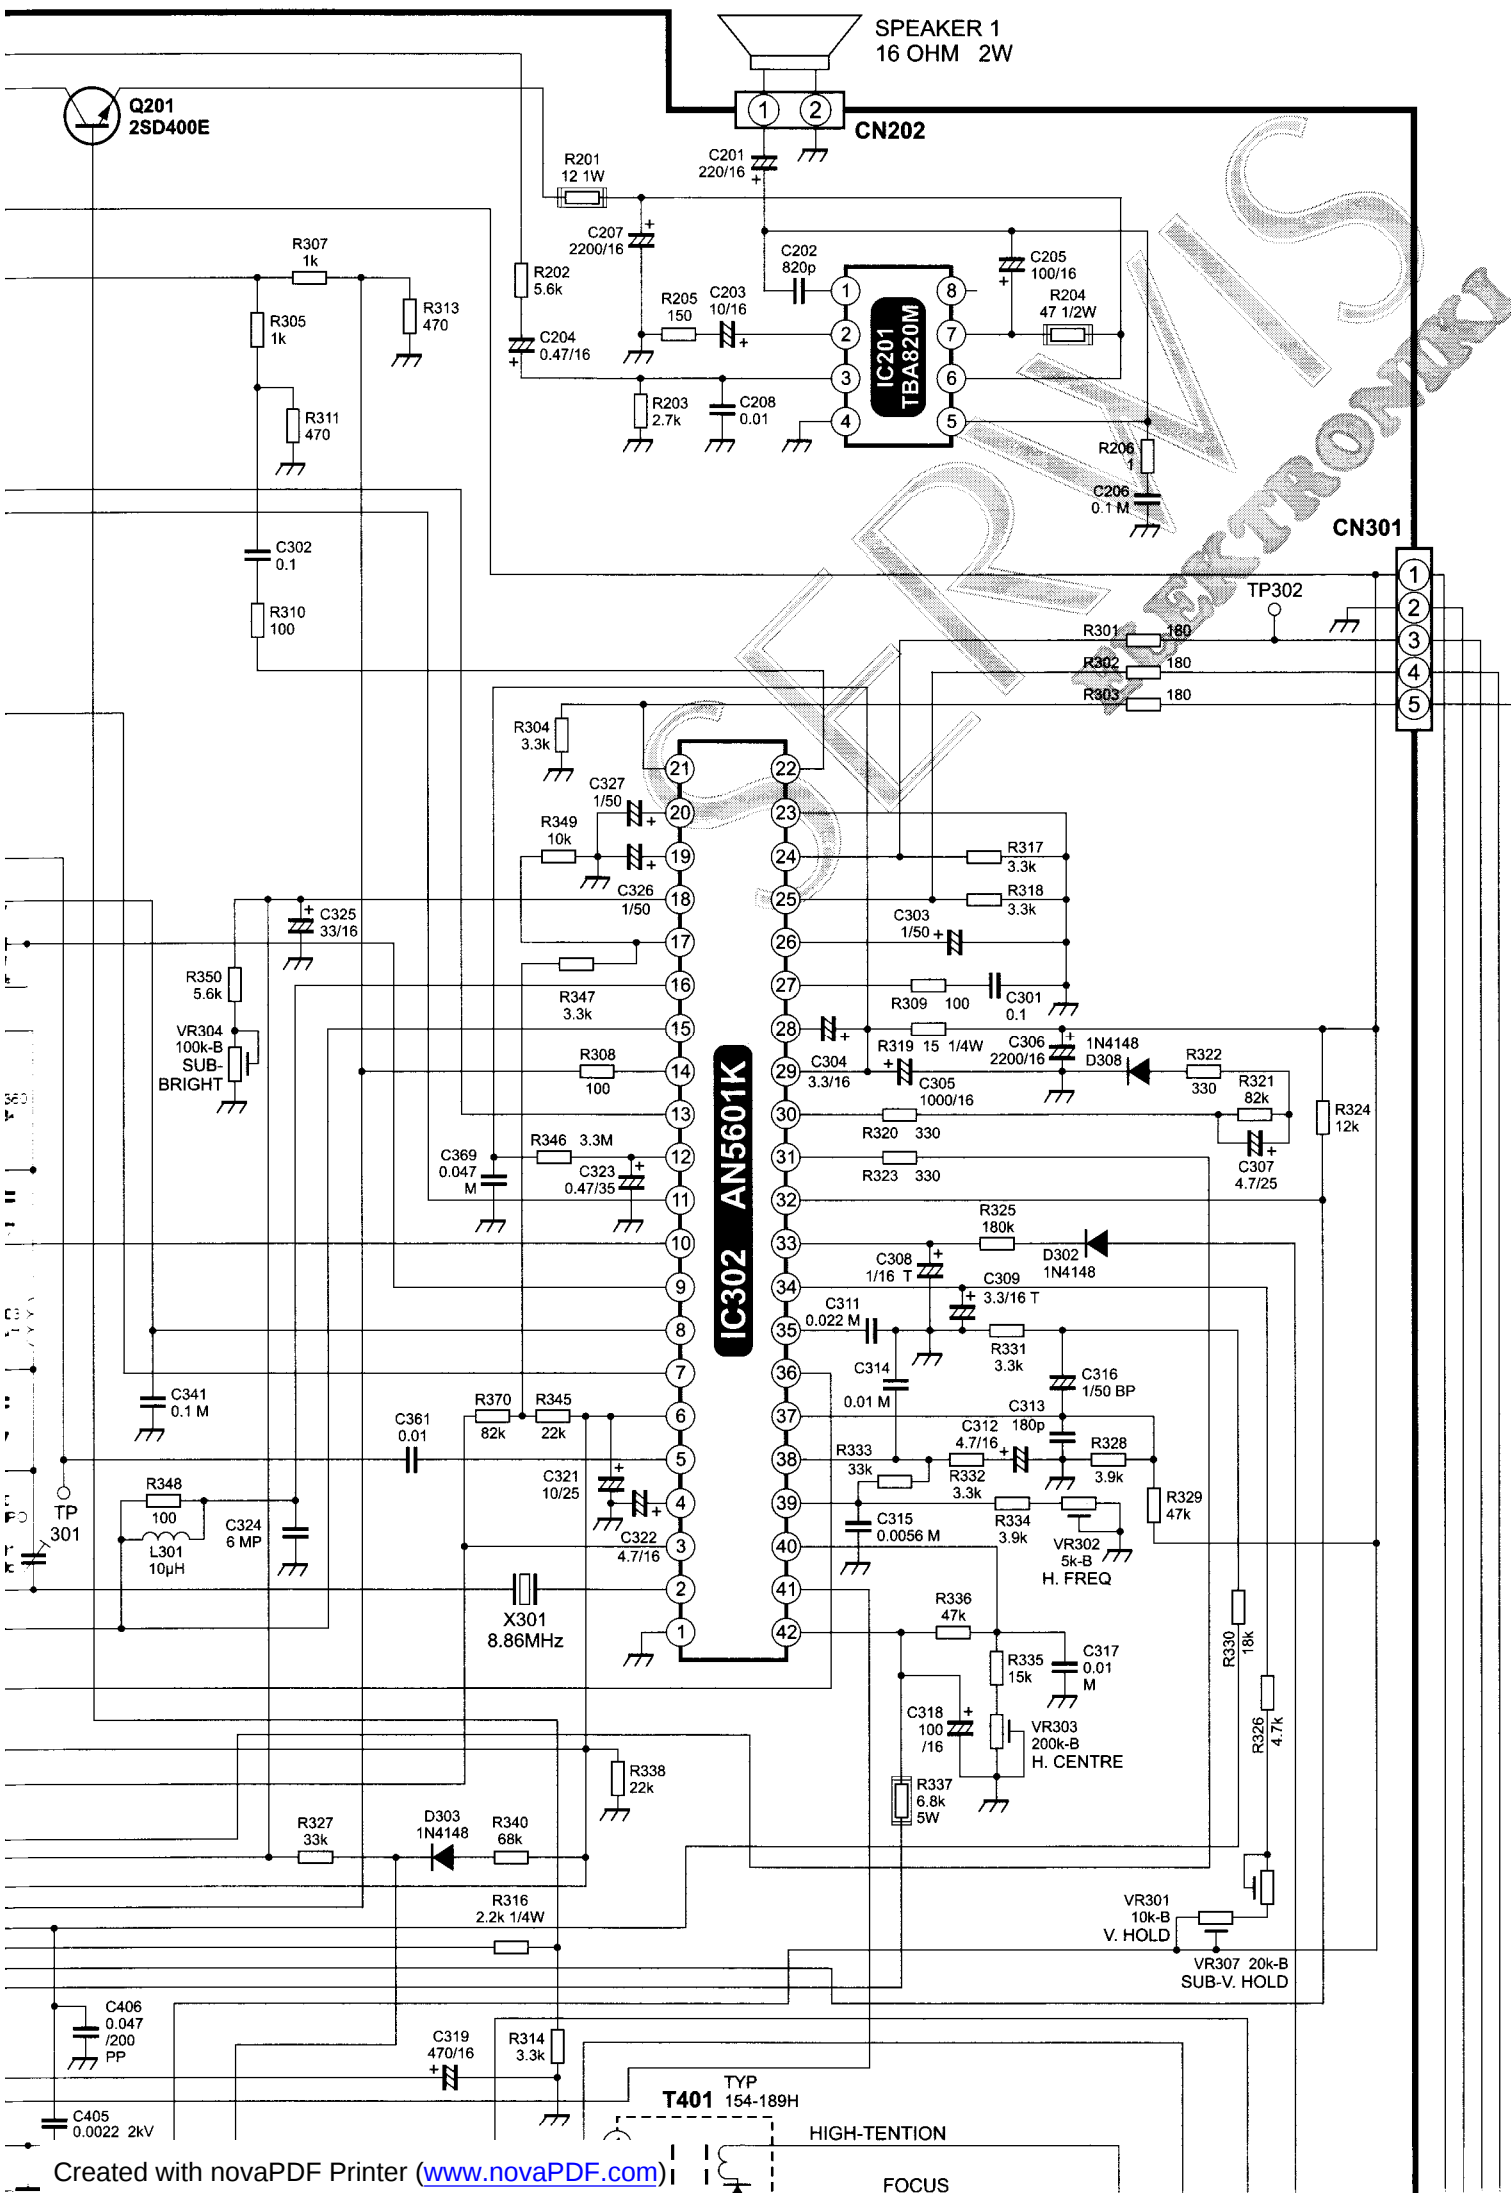


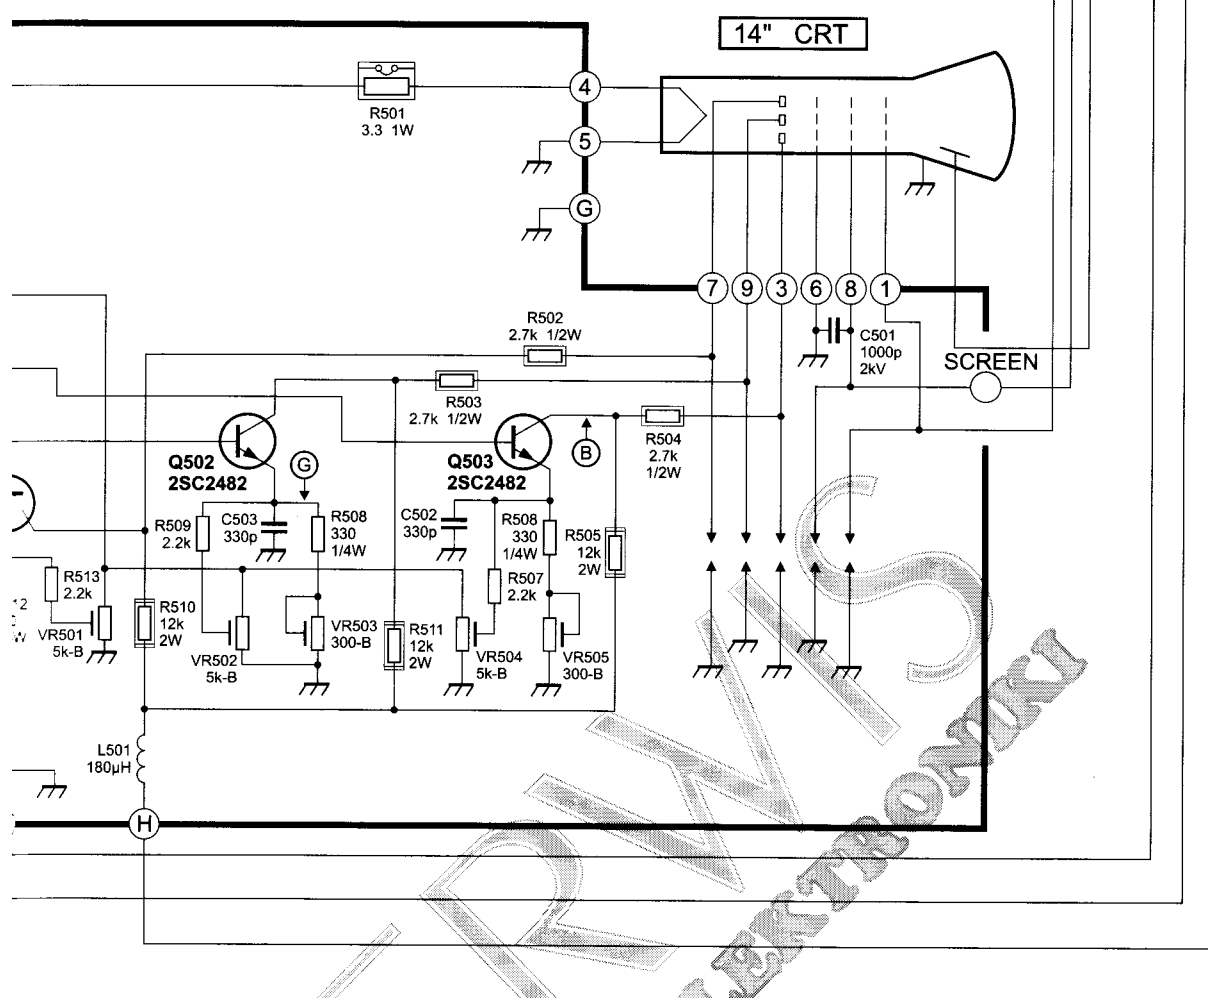

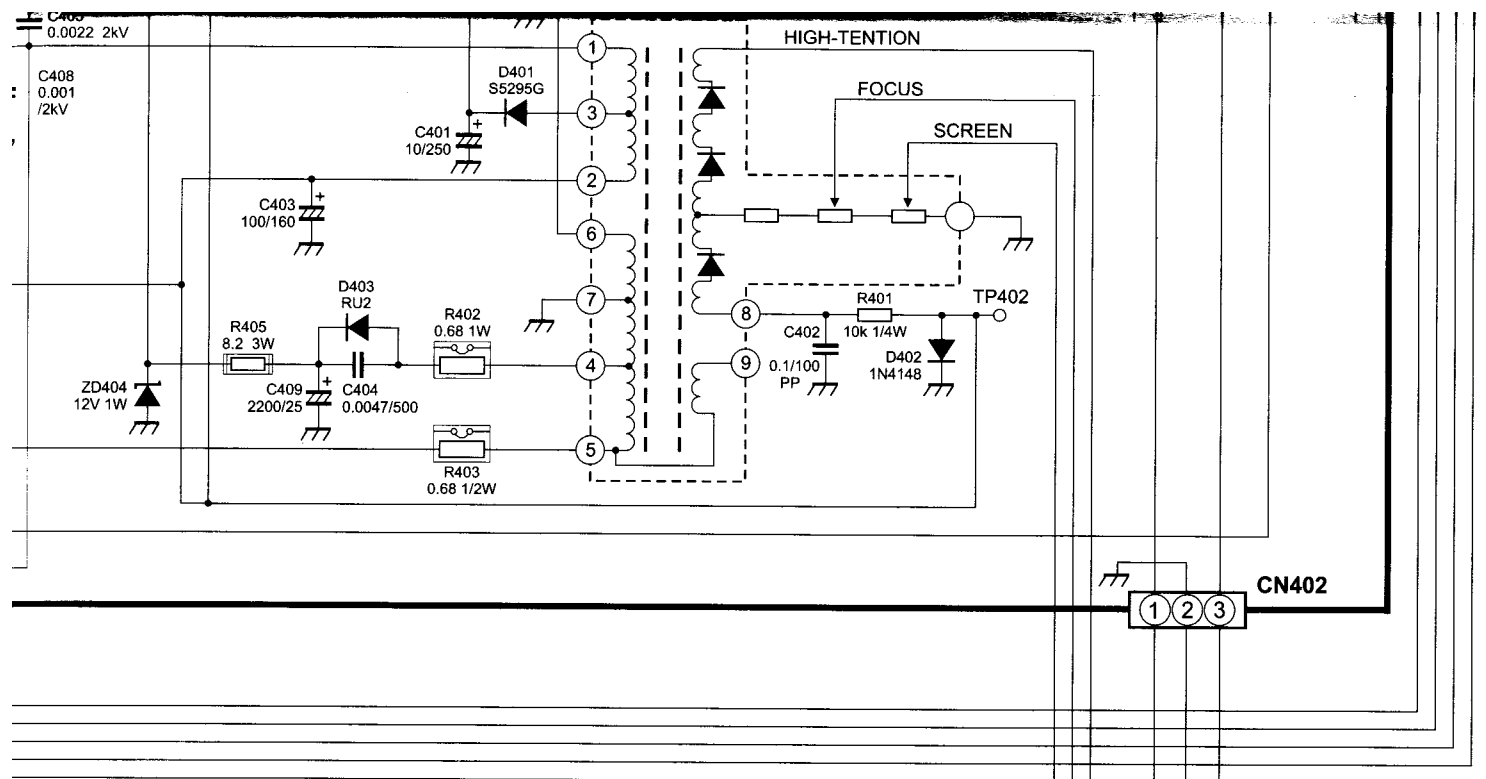

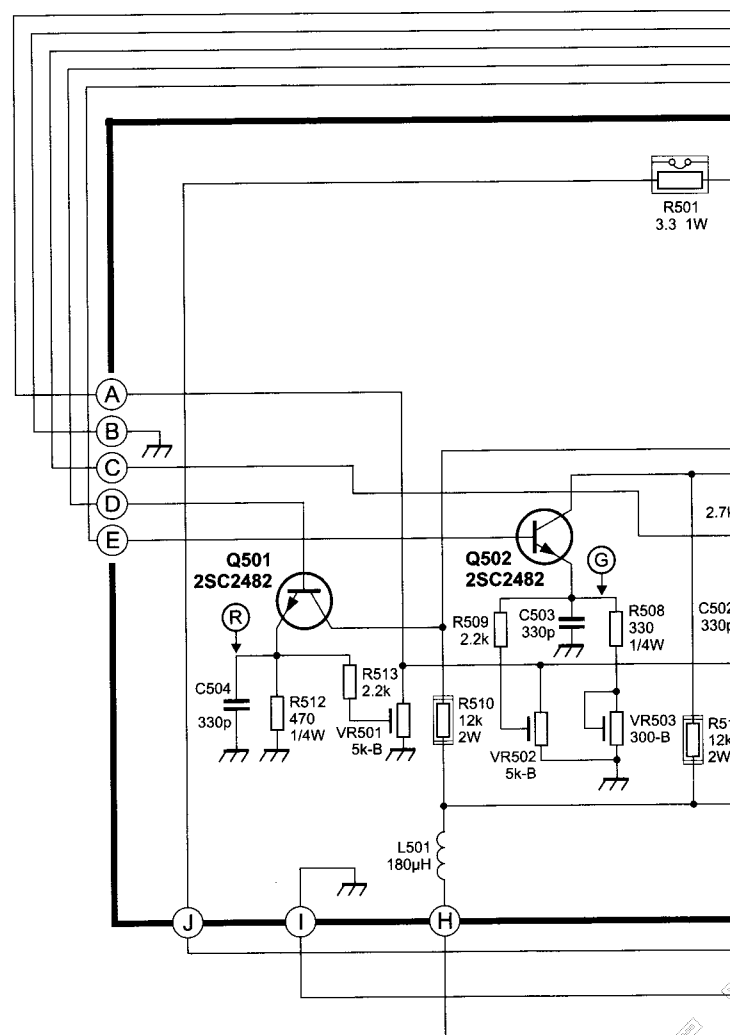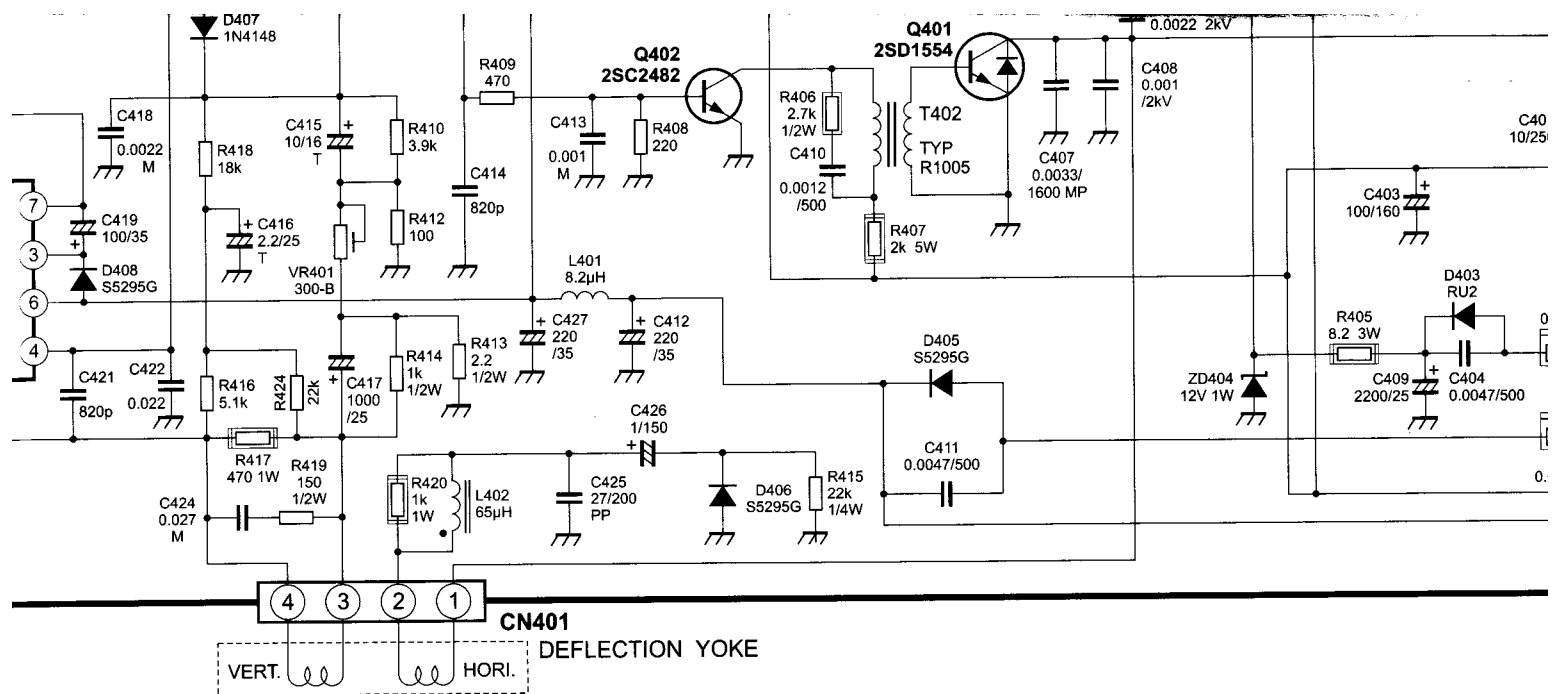





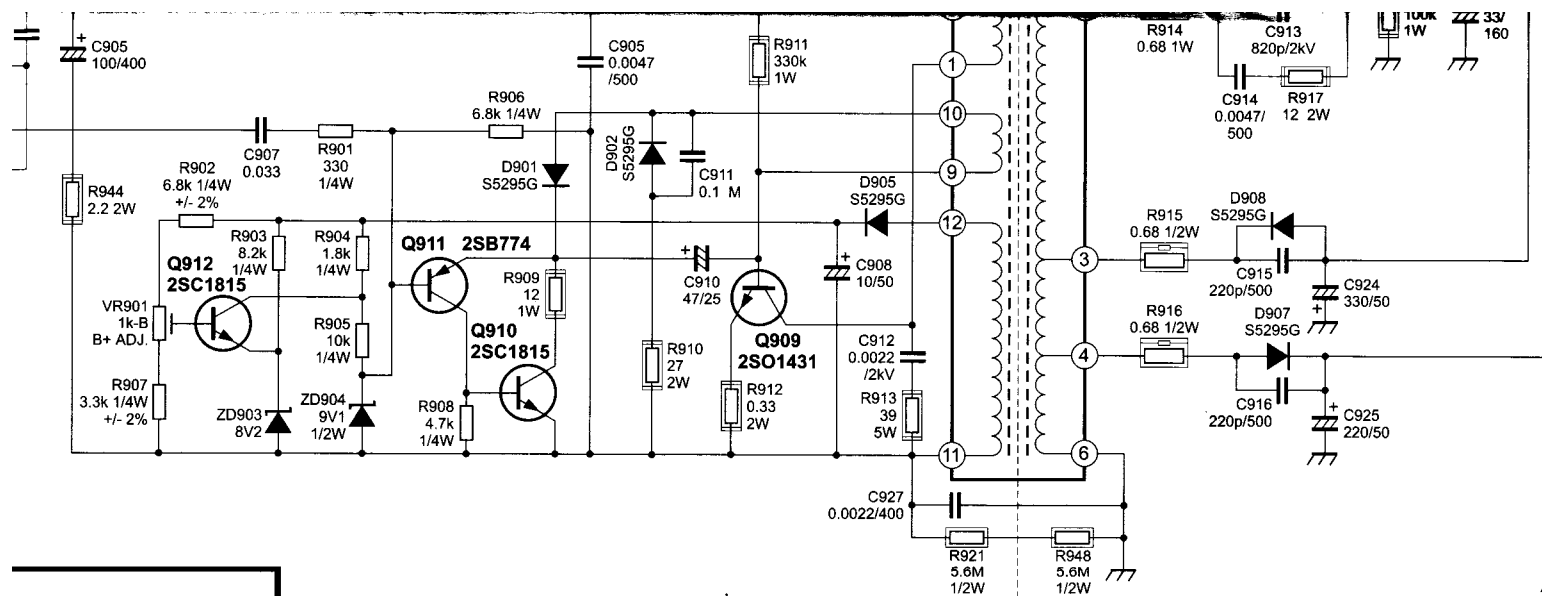

L 40T


VIDEO

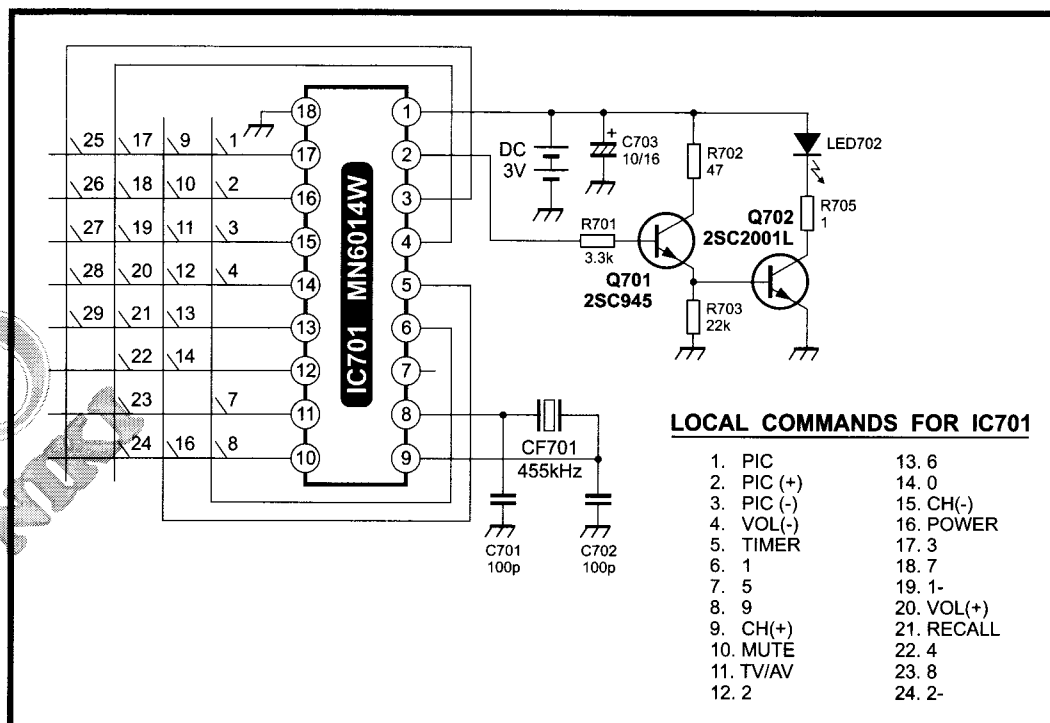

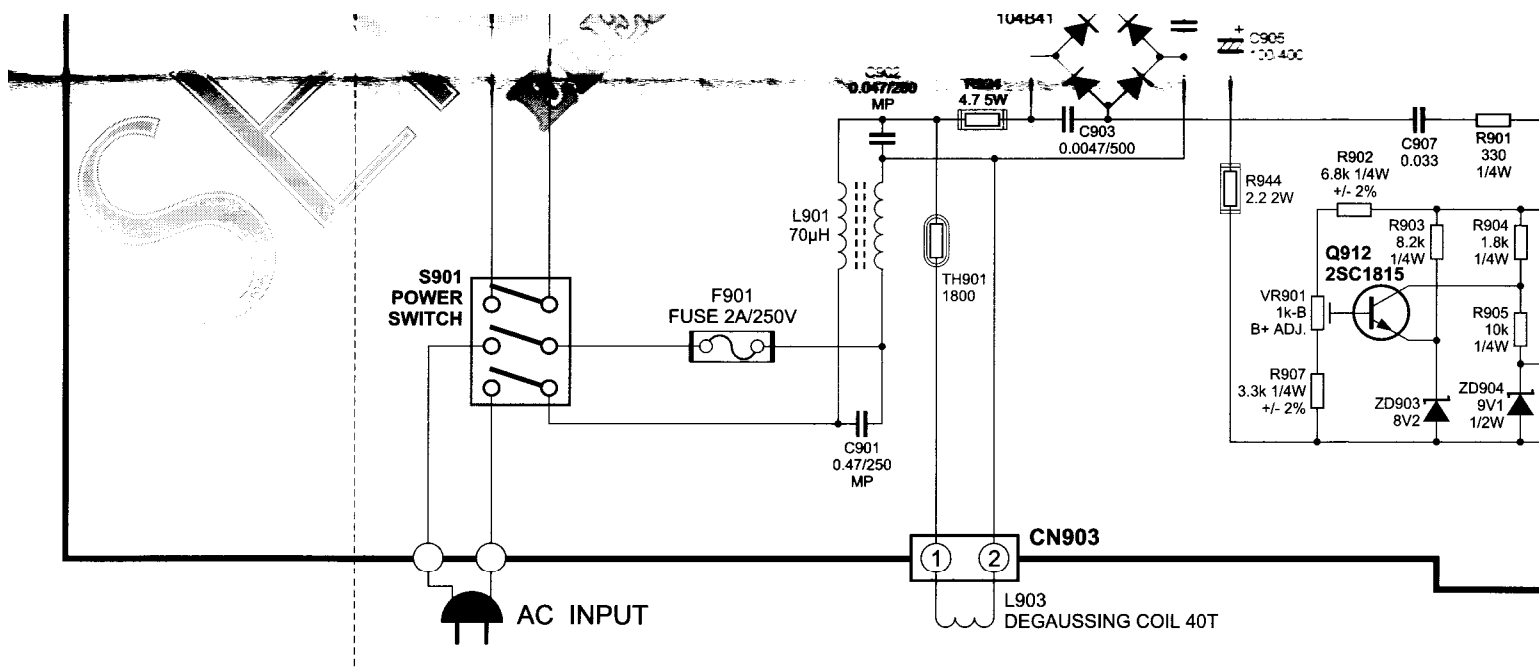

NOTE:

- (1) ALL CAPACITORS ARE IN μF UNLESS OTHERWISE NOTE
ALL CAPACITORS ARE 50WV UNLESS OTHERWISE NOTED
- (2) CAPACITORS NOT SPECIFICALLY DESIGNATED ARE CERAMIC CAPACITOR
- (3) ELECTROLYTIC CAPACITOR
- BP BI-POLAR ELECTROLYTIC CAPACITOR
- T TANTALUM CAPACITOR
- M. MYLAR CAPACITOR
- MP METALLIZED POLYESTOR
- P POLYESTOR FILM CAPACITOR
- PP POLYPROPYLENE CAPACITOR
- (3) ALL RESISTORS ARE IN OHM 1/16W UNLESS OTHERWISE NOTED
- (4) RESISTORS NOT SPECIFICALLY DESIGNATED ARE CARBON FILM RESISTORS

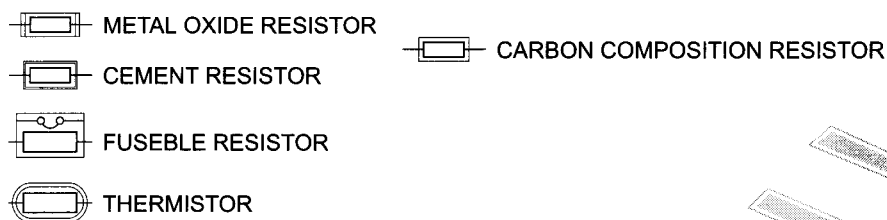

- (5) DC VOLTAGE ARE MEASURED FROM POINTS INDICATED TO THE CIRCUIT GROUND WITH A DIGITAL MULTIMETER TEST.
- (6) WAVEFORMS ARE TAKEN WITH SETTING CONTROLS TO A NORMAL CONITIONS (COLOUR BAR PATTEN).
- (7) THIS CIRCUIT DIAGRAM IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
- (8) ON THE SCHEMATIC SHOULD BE REPLAED WITH EXACT MANUFACTURER RECOMMENED PARTS.

