

JVC

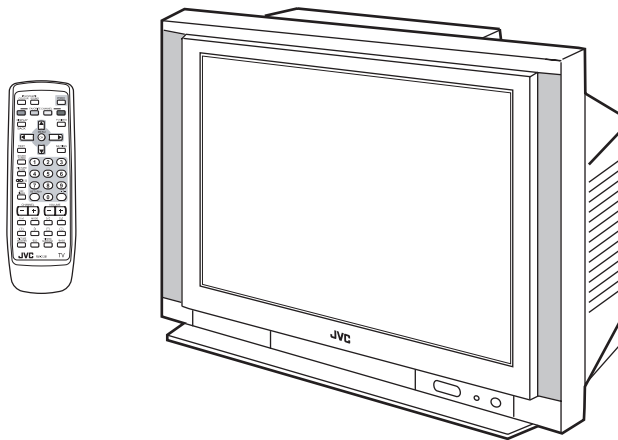
SCHEMATIC DIAGRAMS

FLAT COLOUR TELEVISION

AV-2934L/ESK

CD-ROM No.SML200410

BASIC CHASSIS
CW



STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the $\triangle$ symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20k Ω /V
- (4)Oscilloscope sweeping time : H $\Rightarrow$ 20 μ s / div
: V $\Rightarrow$ 5ms / div
: Others $\Rightarrow$ Sweeping time is specified
- (5)Voltage values : All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- In the PW board : R209 $\rightarrow$ R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

● Resistance value

- No unit : [Ω]
- K : [k Ω]
- M : [M Ω]

● Rated allowable power

- No indication : 1/16 [W]
- Others : As specified

● Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflamable resistor
- FR : Fusible resistor

* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

● Capacitance value

- 1 or higher : [pF]
- less than 1 : [μ F]

● Withstand voltage

- No indication : DC50[V]
- Others : DC withstand voltage [V]
- AC indicated : AC withstand voltage [V]

* Electrolytic Capacitors

47/50[Example]: Capacitance value [μ F]/withstand voltage[V]


●Type

- No indication : Ceramic capacitor
- MM : Metalized mylar capacitor
- PP : Polypropylene capacitor
- MPP : Metalized polypropylene capacitor
- MF : Metalized film capacitor
- TF : Thin film capacitor
- BP : Bipolar electrolytic capacitor
- TAN : Tantalum capacitor

(3)Coils

- No unit : [μ H]
- Others : As specified

(4)Power Supply


-  : B1
-  : B2 (12V)
-  : 9V
-  : 5V

* Respective voltage values are indicated

(5)Test point

-  : Test point
-  : Only test point display

(6)Connecting method

-  : Connector
-  : Wrapping or soldering
-  : Receptacle

(7)Ground symbol

-  : LIVE side ground
-  : ISOLATED(NEUTRAL) side ground
-  : EARTH ground
-  : DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : () side GND and the ISOLATED(NEUTRAL) : () side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

◆ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

CONTENTS

SEMICONDUCTOR SHAPES2-2

USING P.W.BOARD2-2

BLOCK DIAGRAM2-3

CIRCUIT DIAGRAMS

MAIN PWB CIRCUIT DIAGRAM(1/2)2-5

MAIN PWB CIRCUIT DIAGRAM(2/2)2-7

CRT SOCKET PWB CIRCUIT DIAGRAM2-9

FRONT CONTROL PWB CIRCUIT DIAGRAM2-11

PATTERN DIAGRAMS

MAIN PWB PATTERN2-13

CRT SOCKER PWB PATTERN2-15






FRONT CONTROL PWB PATTERN2-16

VOLTAGE CHART2-17





WAVEFORMS2-18

SEMICONDUCTOR SHAPES



TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR 

IC

BOTTOM VIEW	FRONT VIEW			TOP VIEW
				


CHIP IC

TOP VIEW		
		


USING P.W. BOARD

P.W. BOARD ASS'Y NAME	AV-2934L/ESK
MAIN P.W. BOARD	SCW-1072A-H2
CRT SOCKET P.W. BOARD	SCW-3015A-H2
FRONT CONTROL P.W. BOARD	SCW-8002A-H2

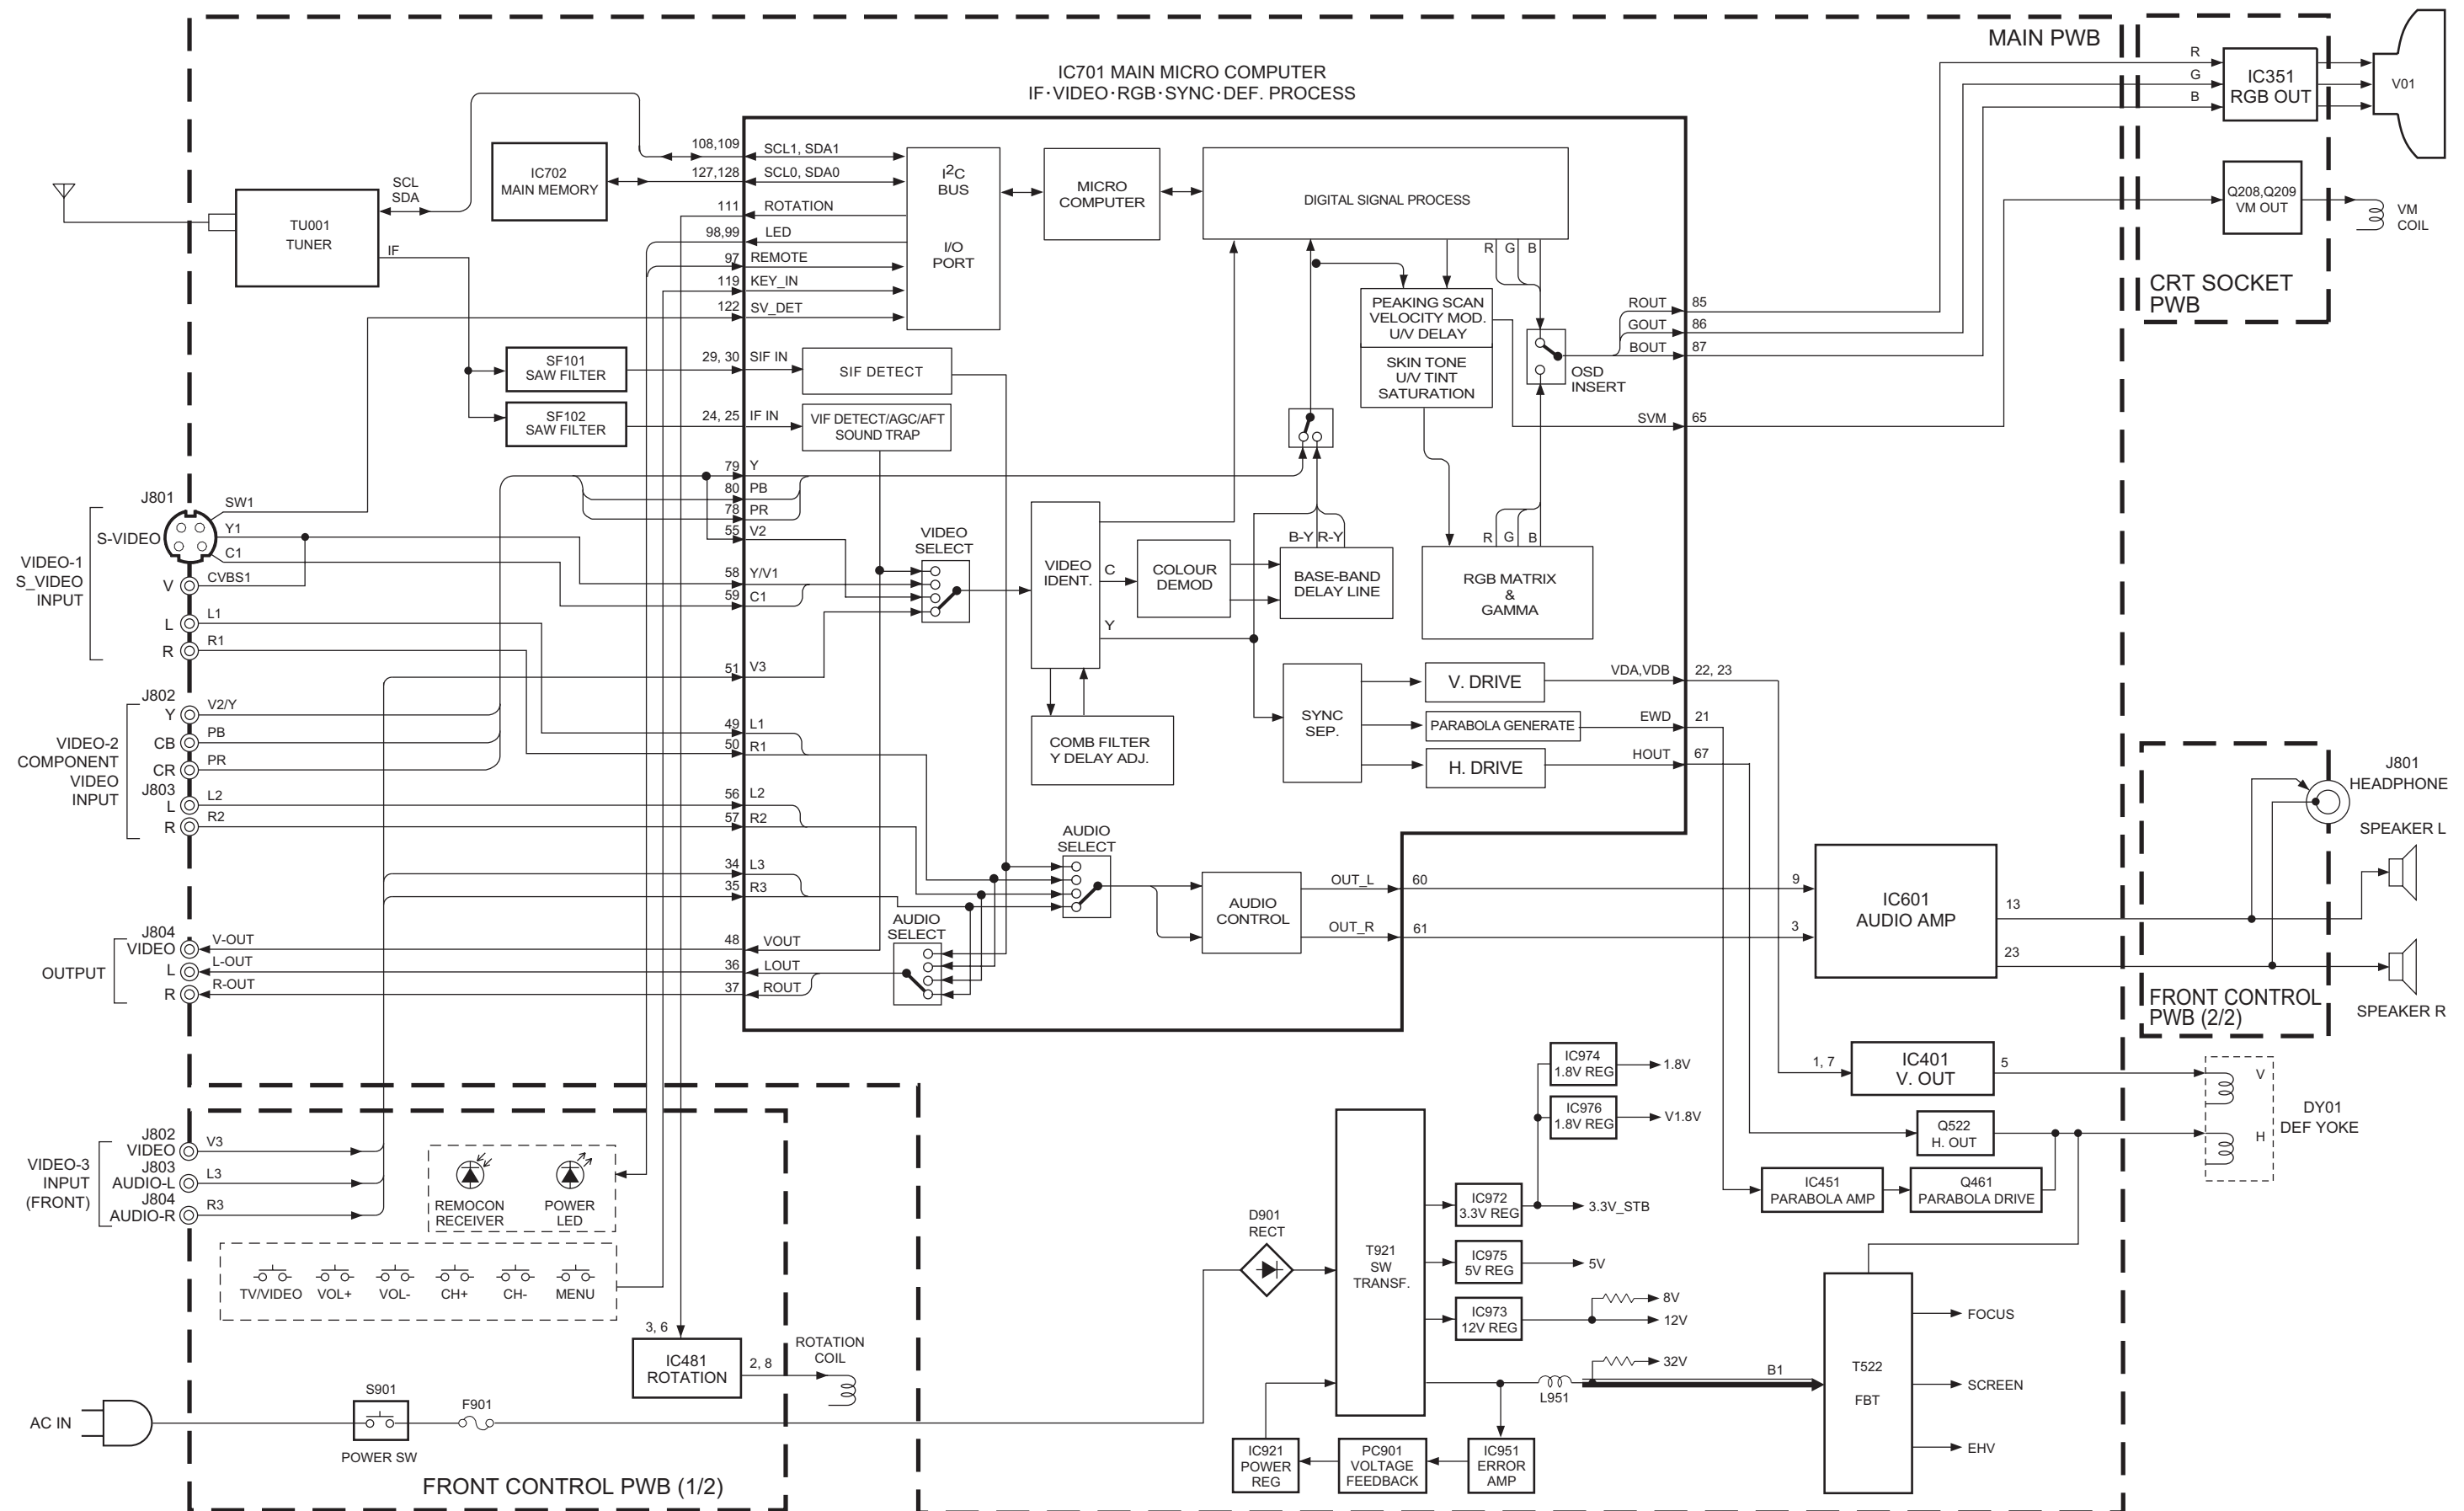BLOCK DIAGRAM




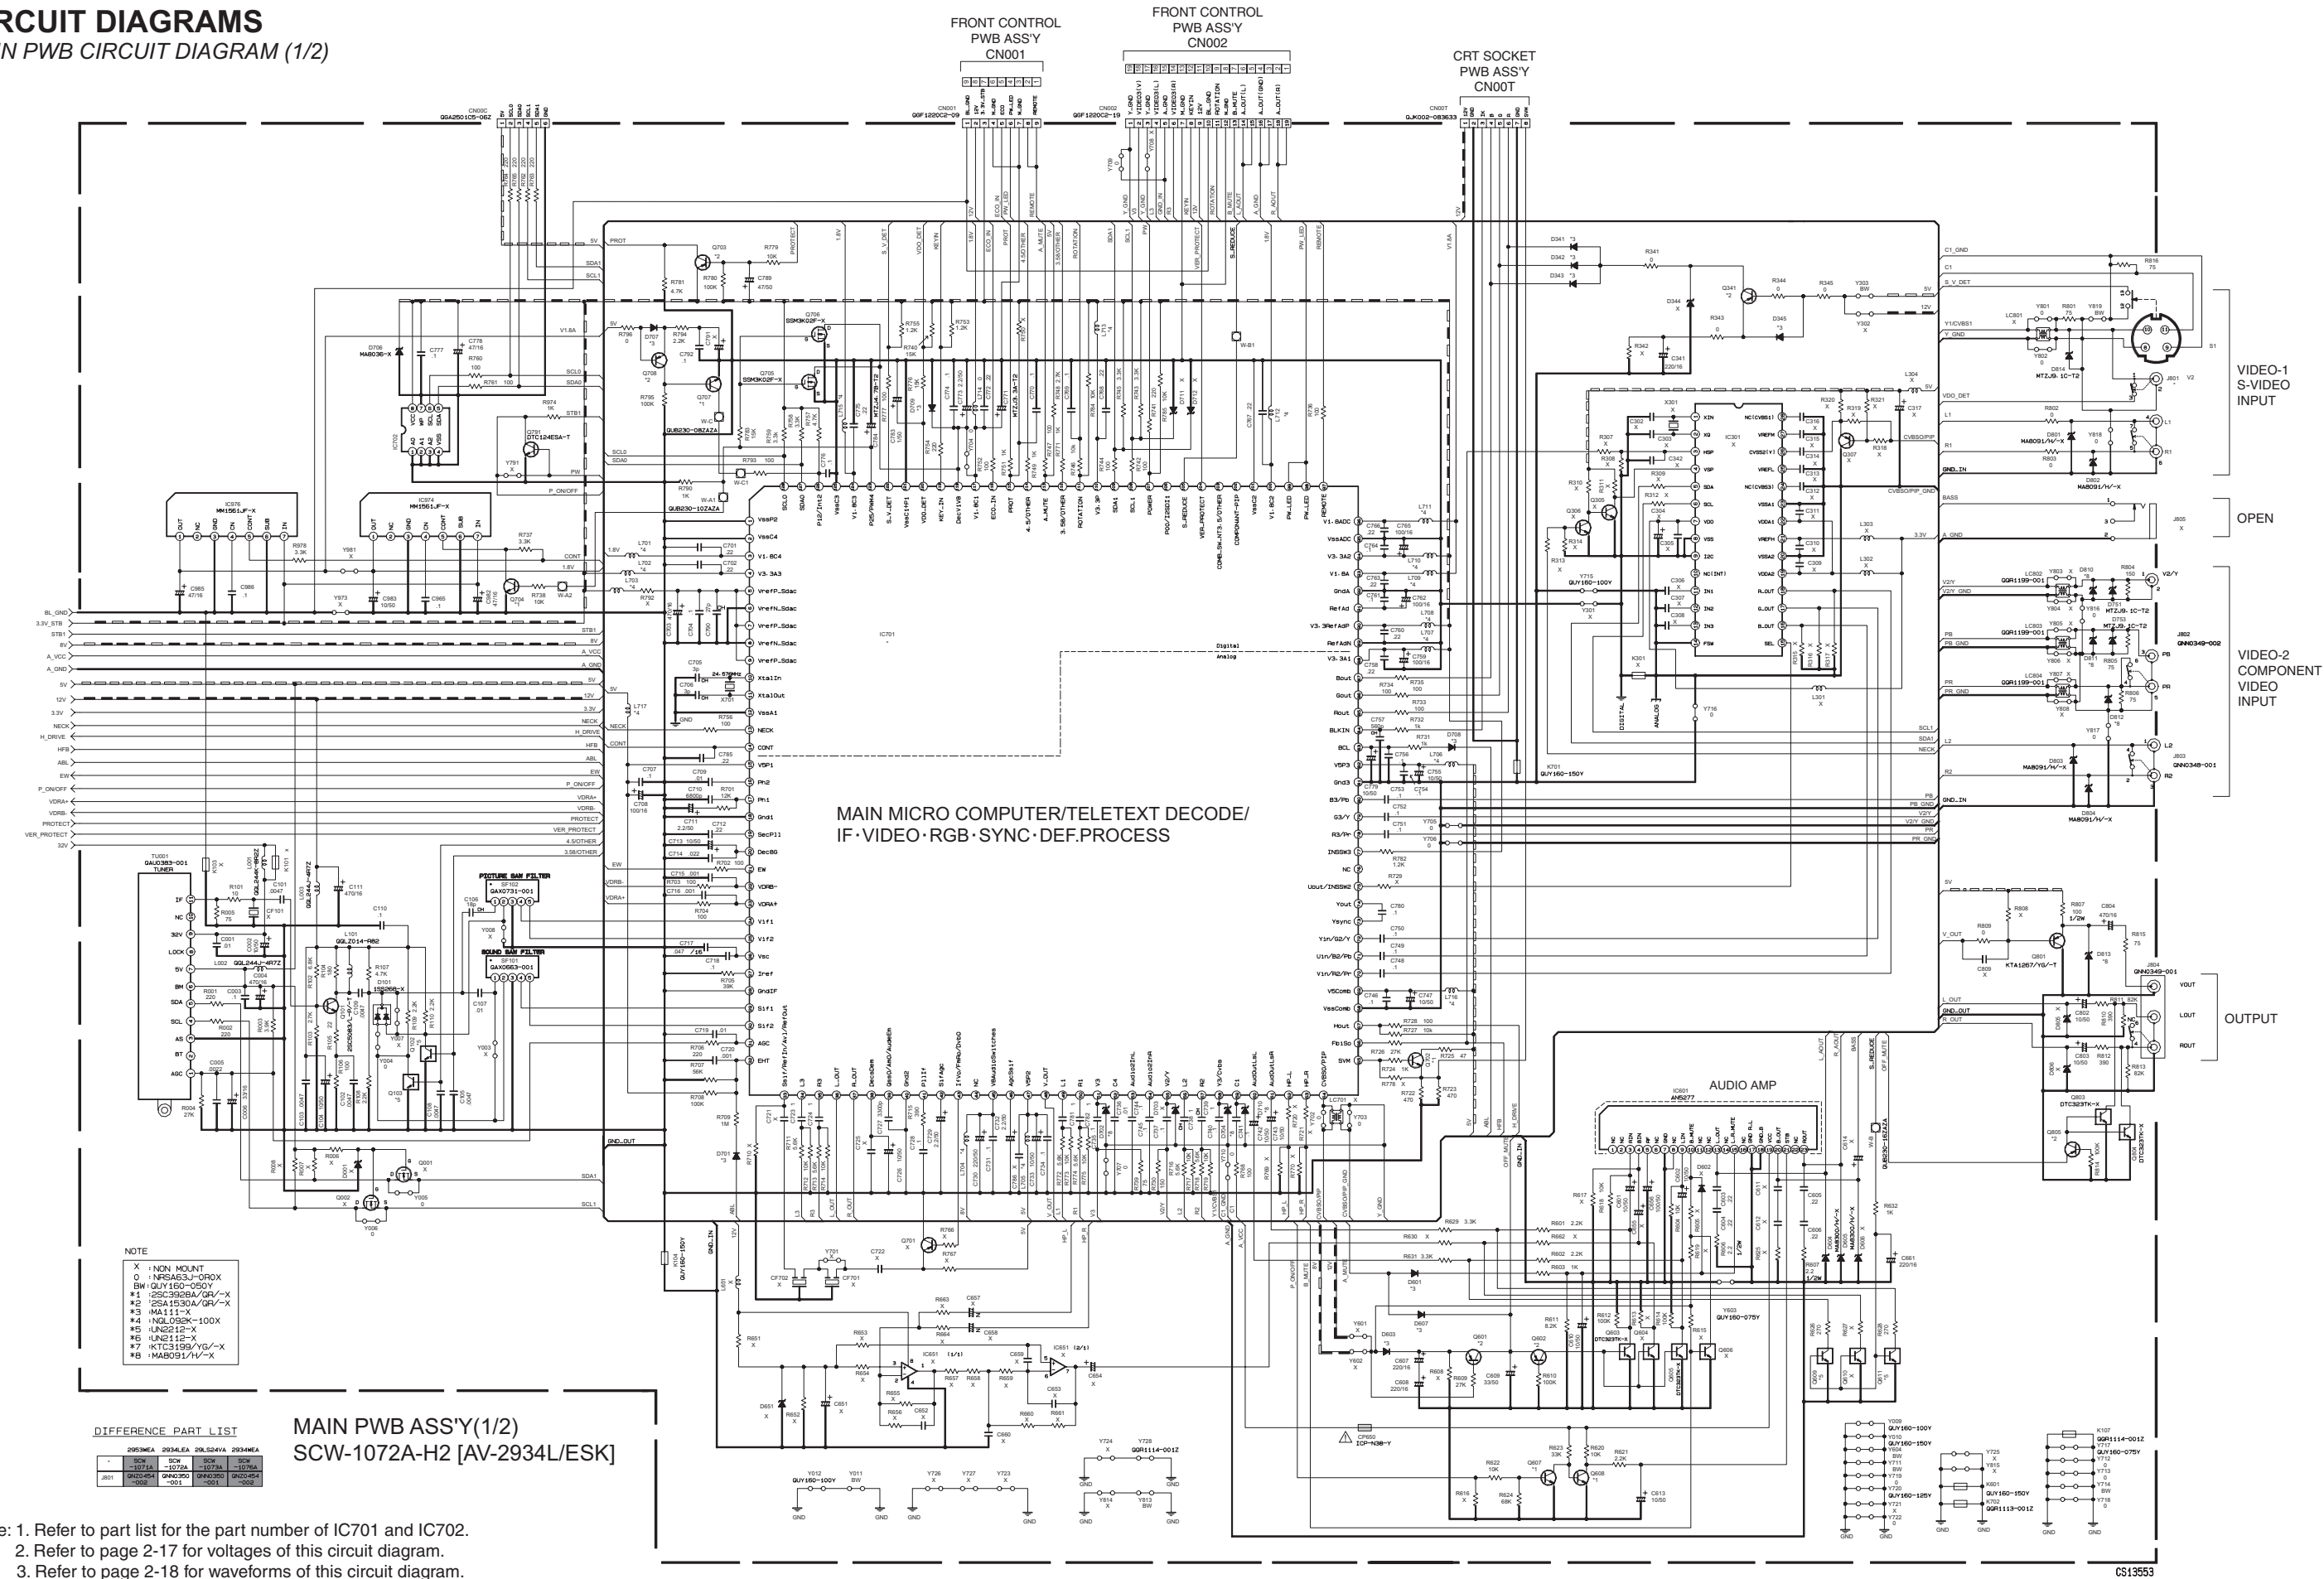CIRCUIT DIAGRAMS
MAIN PWB CIRCUIT DIAGRAM (1/2)



Note: 1. Refer to part list for the part number of IC701 and IC702.
2. Refer to page 2-17 for voltages of this circuit diagram.
3. Refer to page 2-18 for waveforms of this circuit diagram.

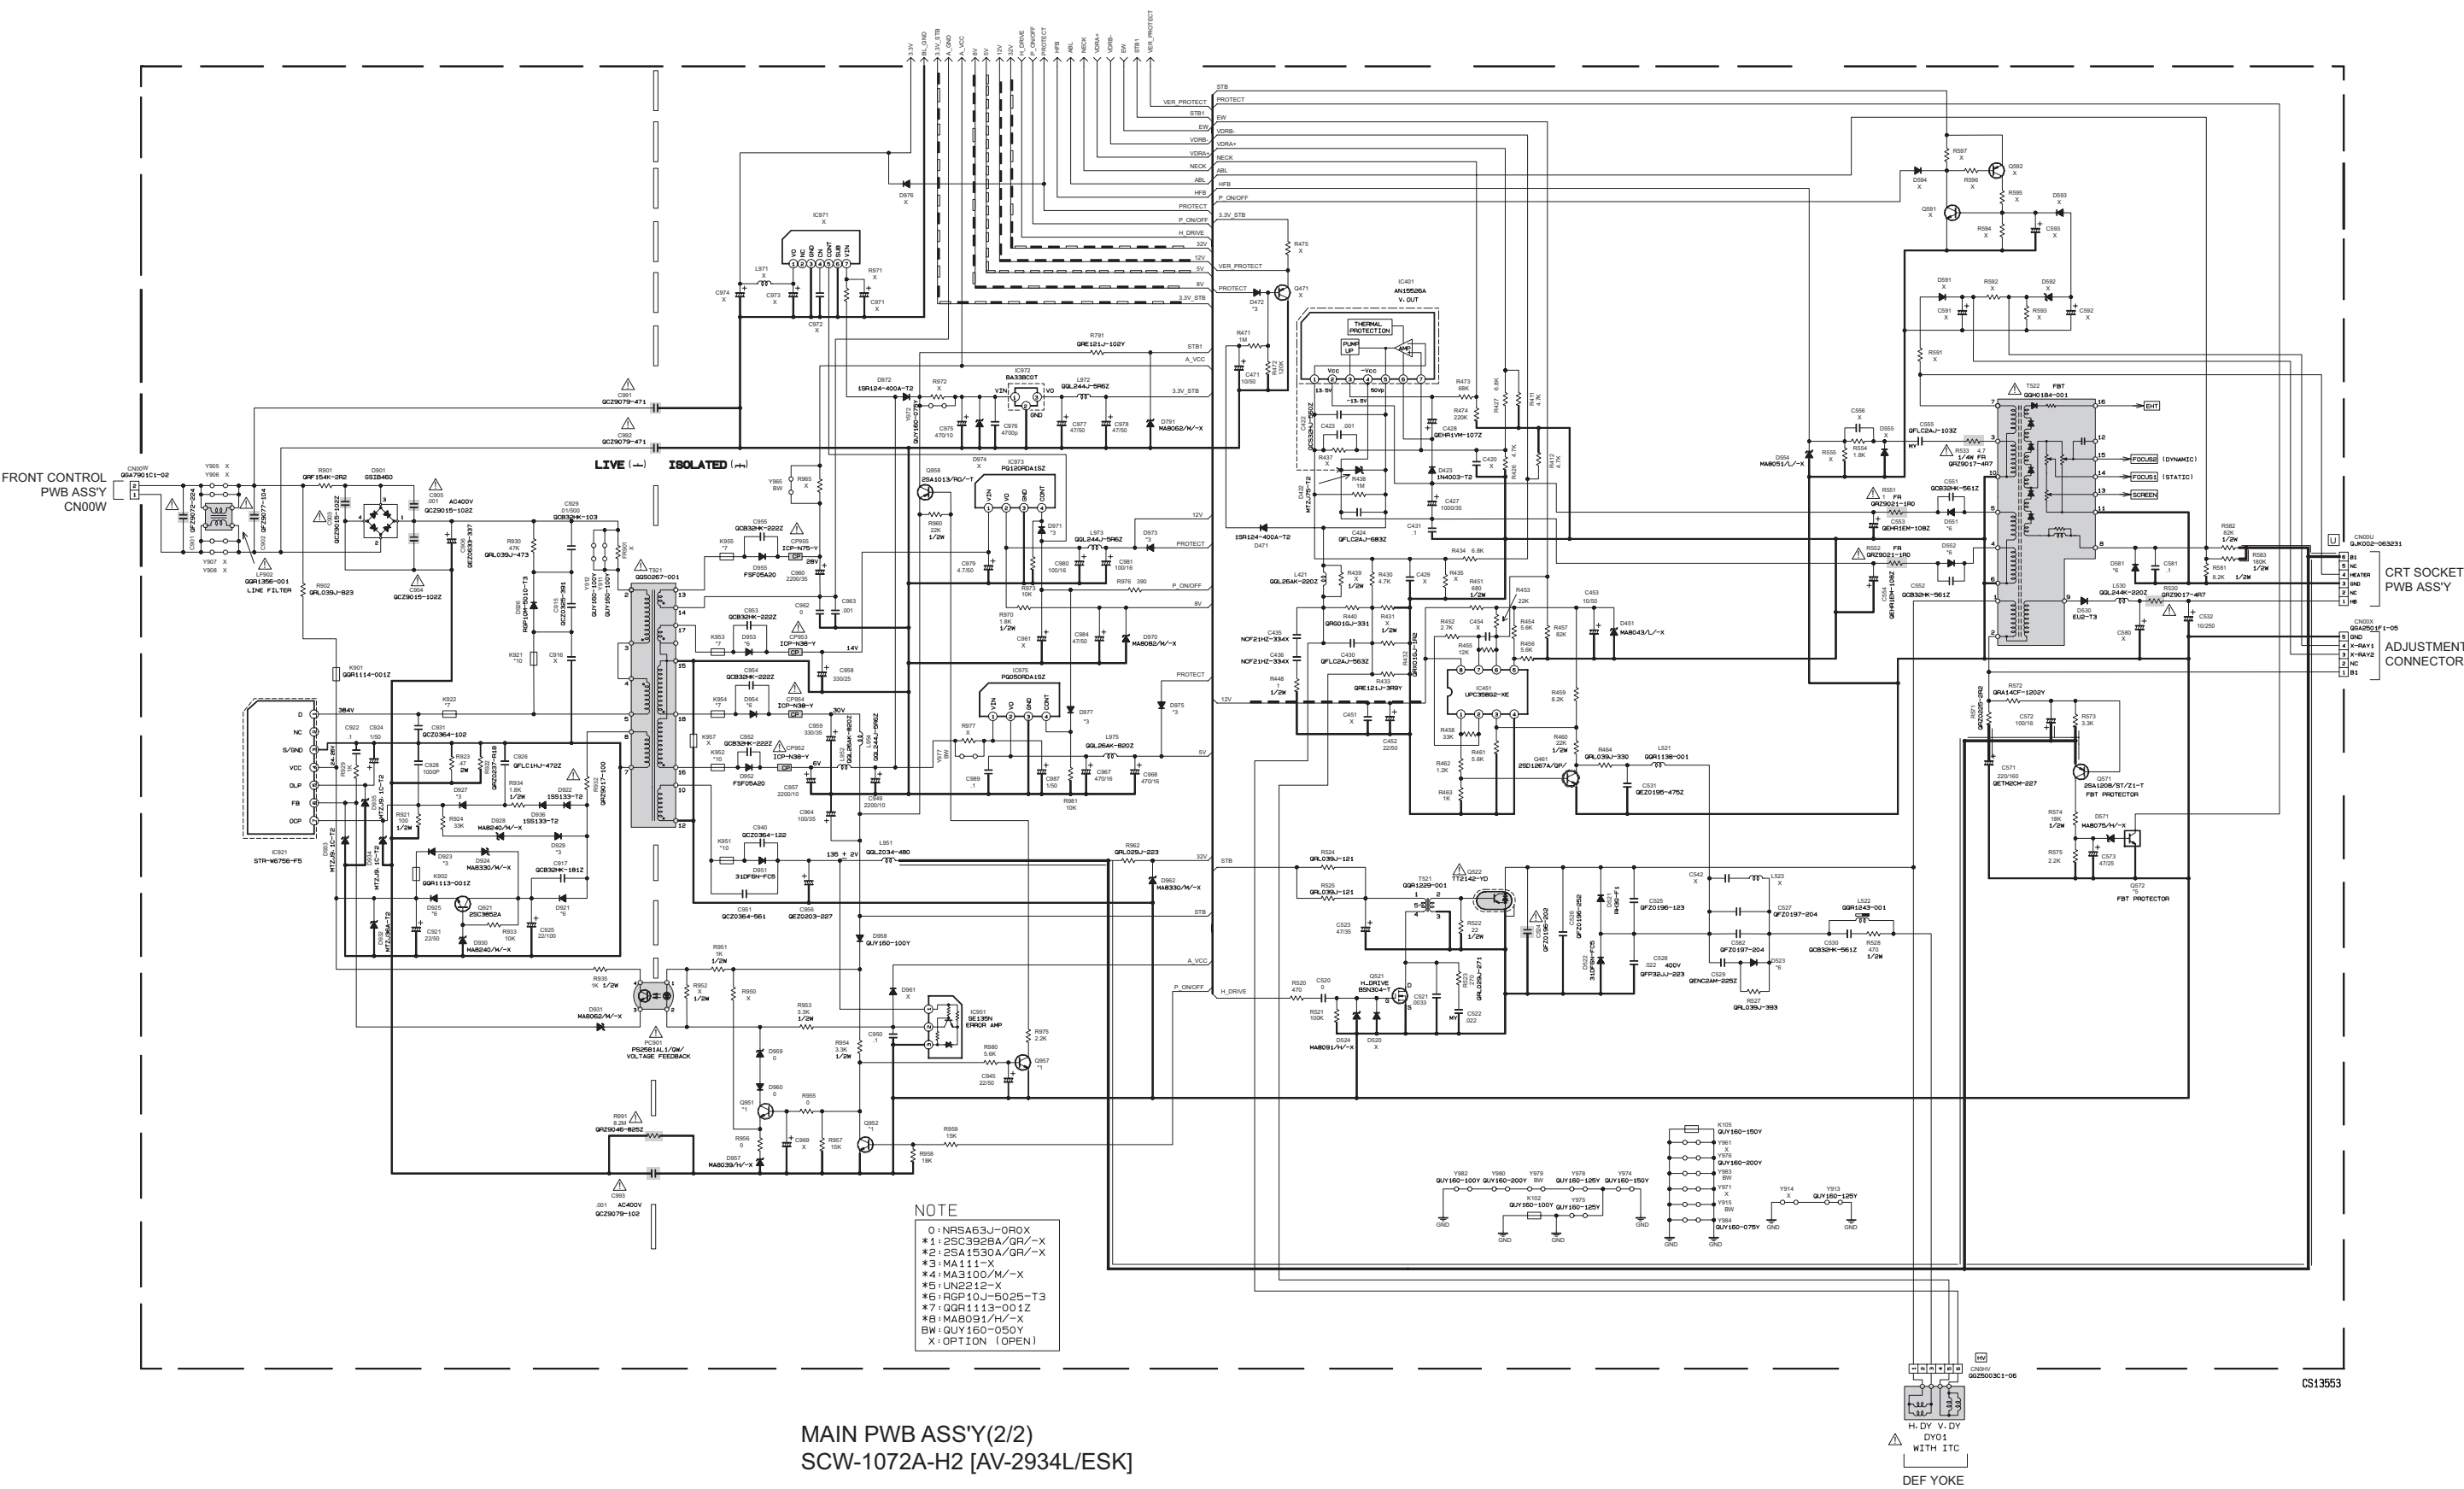MAIN PWB CIRCUIT DIAGRAM (2/2)




Note: 1. Refer to part list for the part number of IC701 and IC702.
2. Refer to page 2-17 for voltages of this circuit diagram.
3. Refer to page 2-18 for waveforms of this circuit diagram.

The schematic diagram illustrates the internal circuitry of a color television set, model TDA6107AJF/N1. The central component is the IC351 (TDA6107AJF/N1), which is connected to various input and output pins. The circuit includes a power supply section with a transformer (K207) and a rectifier (D201, D202, D203) to provide a 123V AC supply. The power supply is regulated by a 123V regulator (Q208) and a 63.8V regulator (Q209). The video signal is processed by a video amplifier (Q204, Q205) and a video driver (Q206, Q207). The video signal is then sent to the CRT assembly (V01) via a video output (VM OUT) and a video driver (Q208, Q209). The CRT assembly includes a picture tube (A68GCU770X52ND) and a focus coil (K204). The circuit also includes a heater section (HB) and a screen section (SCREEN). The schematic includes a list of components and their values, such as resistors (R201, R202, R203, R204, R205, R206, R207, R208, R209, R210, R211, R212, R213, R214, R215, R216, R217, R218, R219, R220, R221, R222, R223, R224, R225, R226, R227, R228, R229, R230, R231, R232, R233, R234, R235, R236, R237, R238, R239, R240, R241, R242, R243, R244, R245, R246, R247, R248, R249, R250, R251, R252, R253, R254, R255, R256, R257, R258, R259, R260, R261, R262, R263, R264, R265, R266, R267, R268, R269, R270, R271, R272, R273, R274, R275, R276, R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R287, R288, R289, R290, R291, R292, R293, R294, R295, R296, R297, R298, R299, R300, R301, R302, R303, R304, R305, R306, R307, R308, R309, R310, R311, R312, R313, R314, R315, R316, R317, R318, R319, R320, R321, R322, R323, R324, R325, R326, R327, R328, R329, R330, R331, R332, R333, R334, R335, R336, R337, R338, R339, R340, R341, R342, R343, R344, R345, R346, R347, R348, R349, R350, R351, R352, R353, R354, R355, R356, R357, R358, R359, R360, R361, R362, R363, R364, R365, R366, R367, R368, R369, R370, R371, R372, R373, R374, R375, R376, R377, R378, R379, R380, R381, R382, R383, R384, R385, R386, R387, R388, R389, R390, R391, R392, R393, R394, R395, R396, R397, R398, R399, R400, R401, R402, R403, R404, R405, R406, R407, R408, R409, R410, R411, R412, R413, R414, R415, R416, R417, R418, R419, R420, R421, R422, R423, R424, R425, R426, R427, R428, R429, R430, R431, R432, R433, R434, R435, R436, R437, R438, R439, R440, R441, R442, R443, R444, R445, R446, R447, R448, R449, R450, R451, R452, R453, R454, R455, R456, R457, R458, R459, R460, R461, R462, R463, R464, R465, R466, R467, R468, R469, R470, R471, R472, R473, R474, R475, R476, R477, R478, R479, R480, R481, R482, R483, R484, R485, R486, R487, R488, R489, R490, R491, R492, R493, R494, R495, R496, R497, R498, R499, R500, R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848, R849, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R860, R861, R862, R863, R864, R865, R866, R867, R868, R869, R870, R871, R872, R873, R874, R875, R876, R877, R878, R879, R880, R881, R882, R883, R884, R885, R886, R887, R888, R889, R890, R891, R892, R893, R894, R895, R896, R897, R898, R899, R900, R901, R902, R903, R904, R905, R906, R907, R908, R909, R910, R911, R912, R913, R914, R915, R916, R917, R918, R919, R920, R921, R922, R923, R924, R925, R926, R927, R928, R929, R930, R931, R932, R933, R934, R935, R936, R937, R938, R939, R940, R941, R942, R943, R944, R945, R946, R947, R948, R949, R950, R951, R952, R953, R

2-10(No.YA195)


CS21127

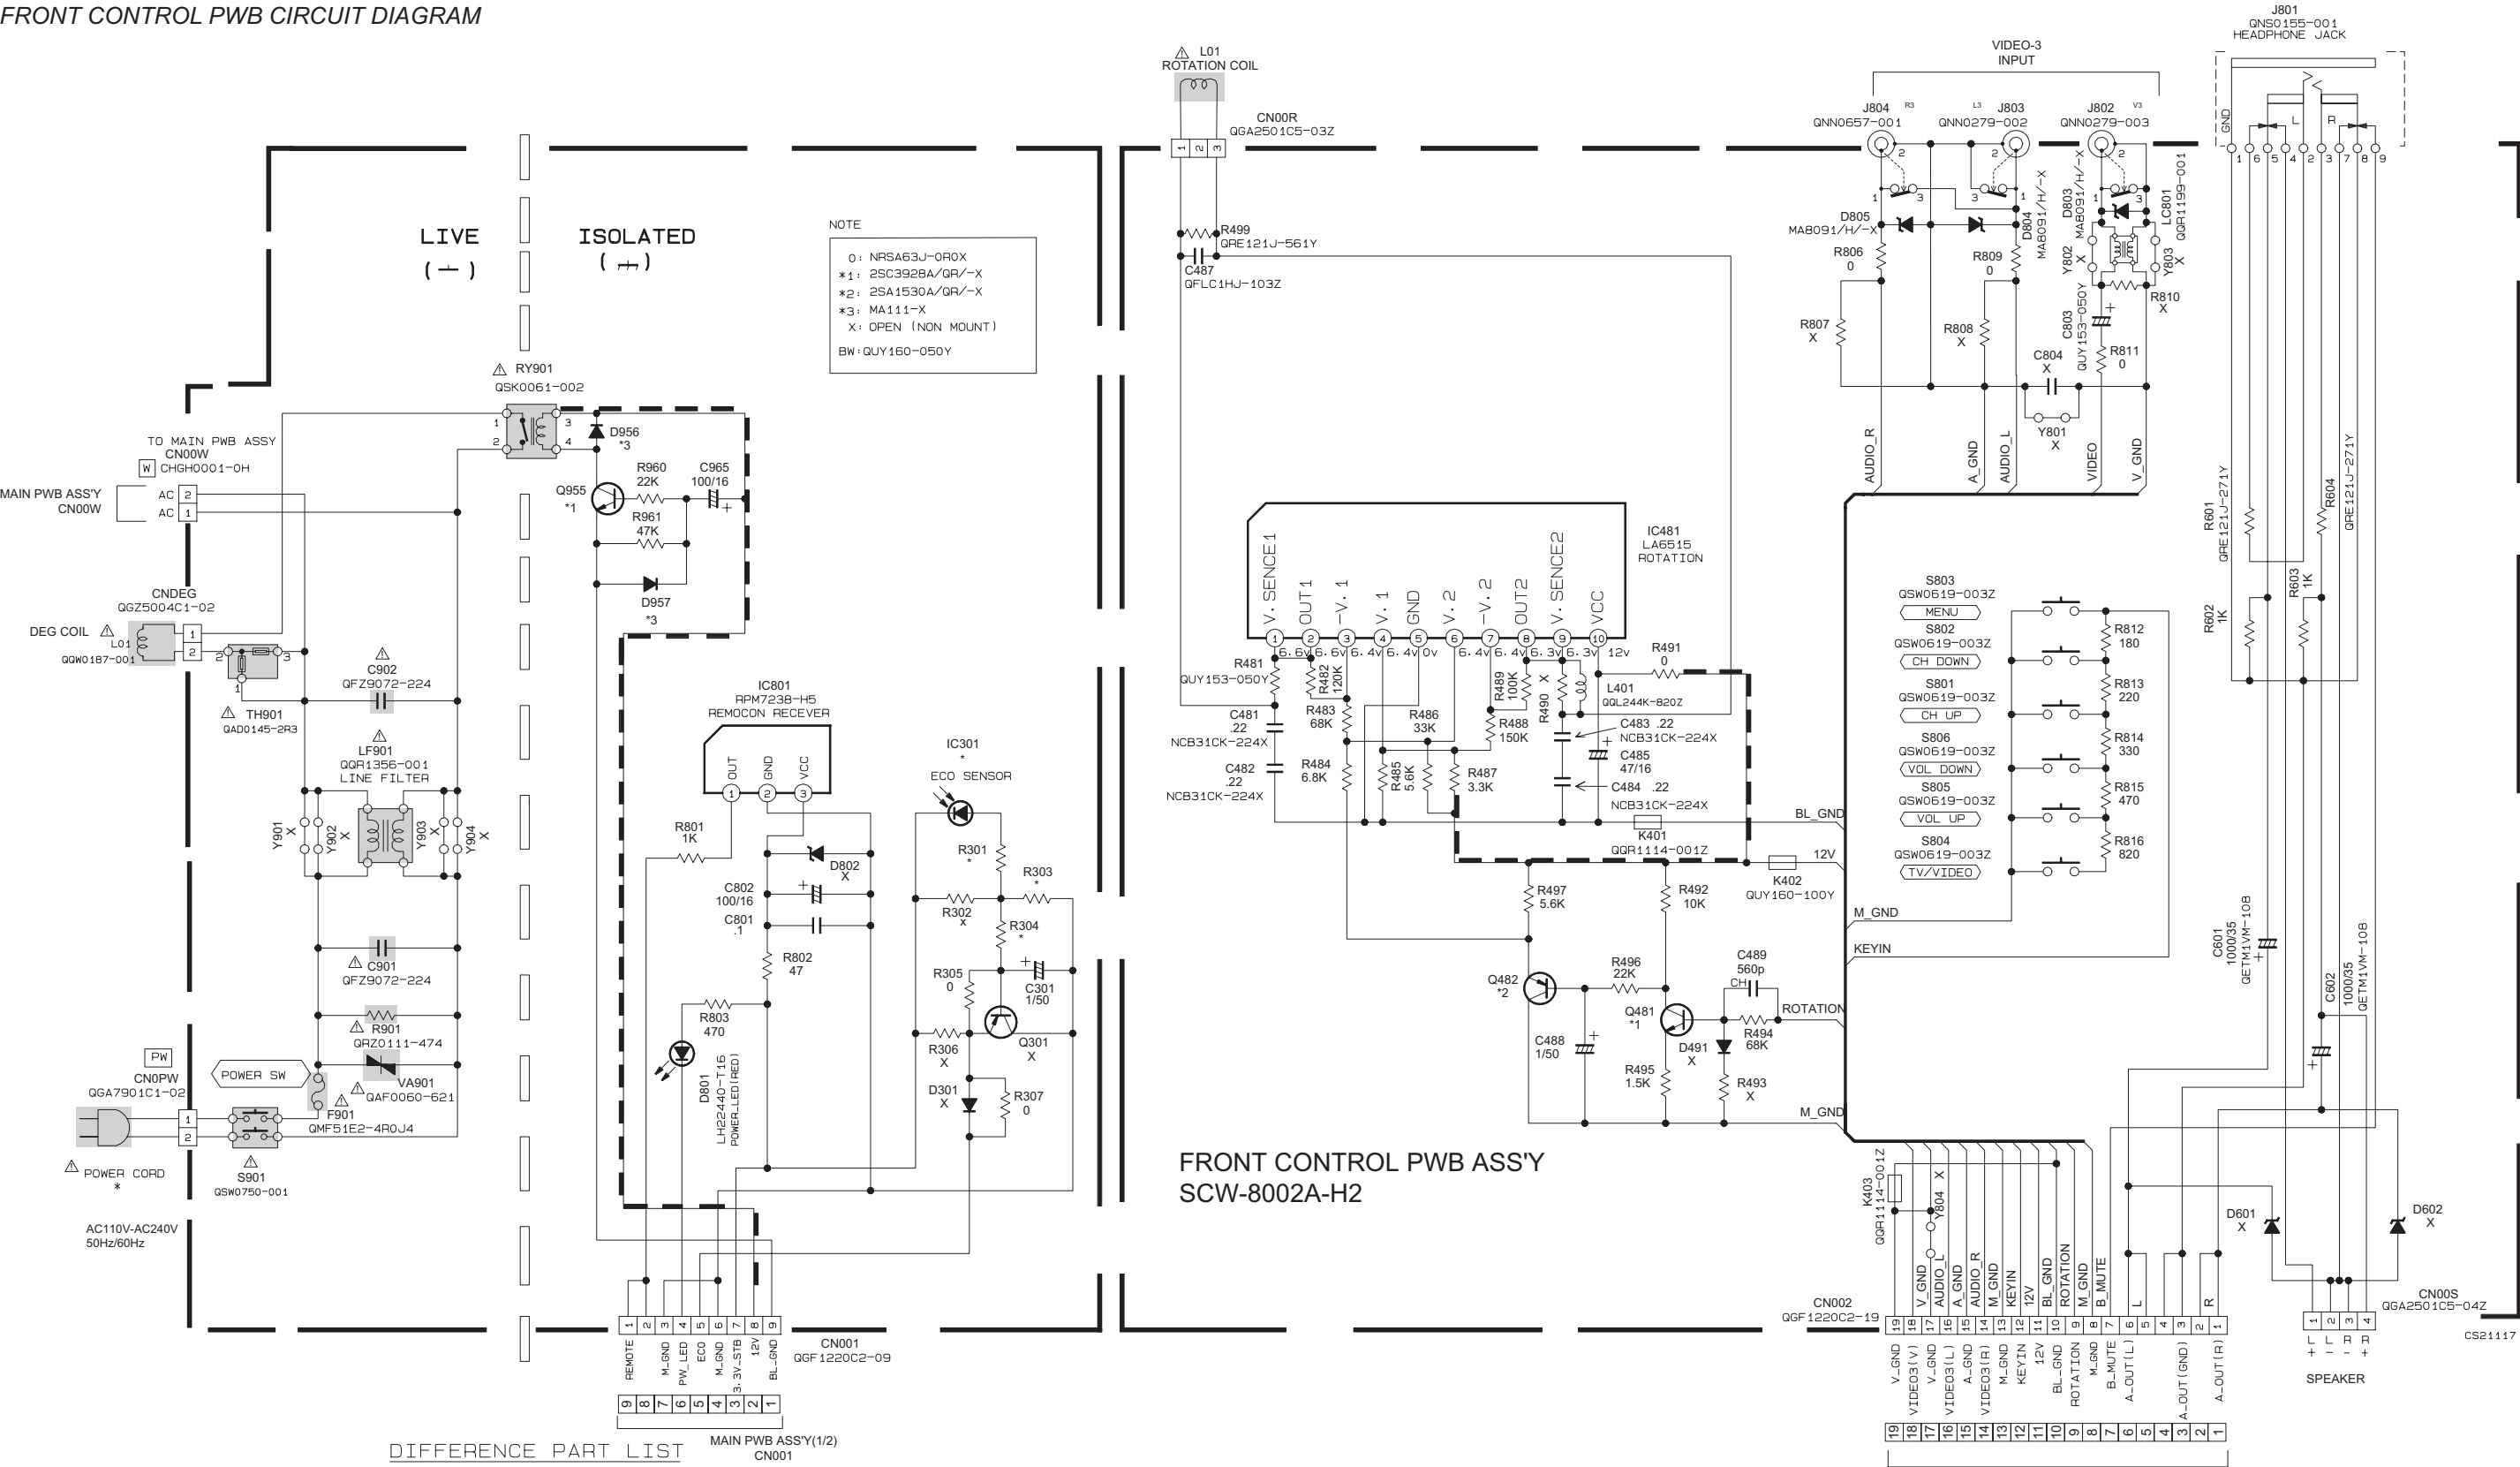FRONT CONTROL PWB CIRCUIT DIAGRAM





Note: Refer to page 2-18 for waveforms of this circuit diagram.

MAIN PWB PATTERN



FRONT CONTROL PWB PATTERN

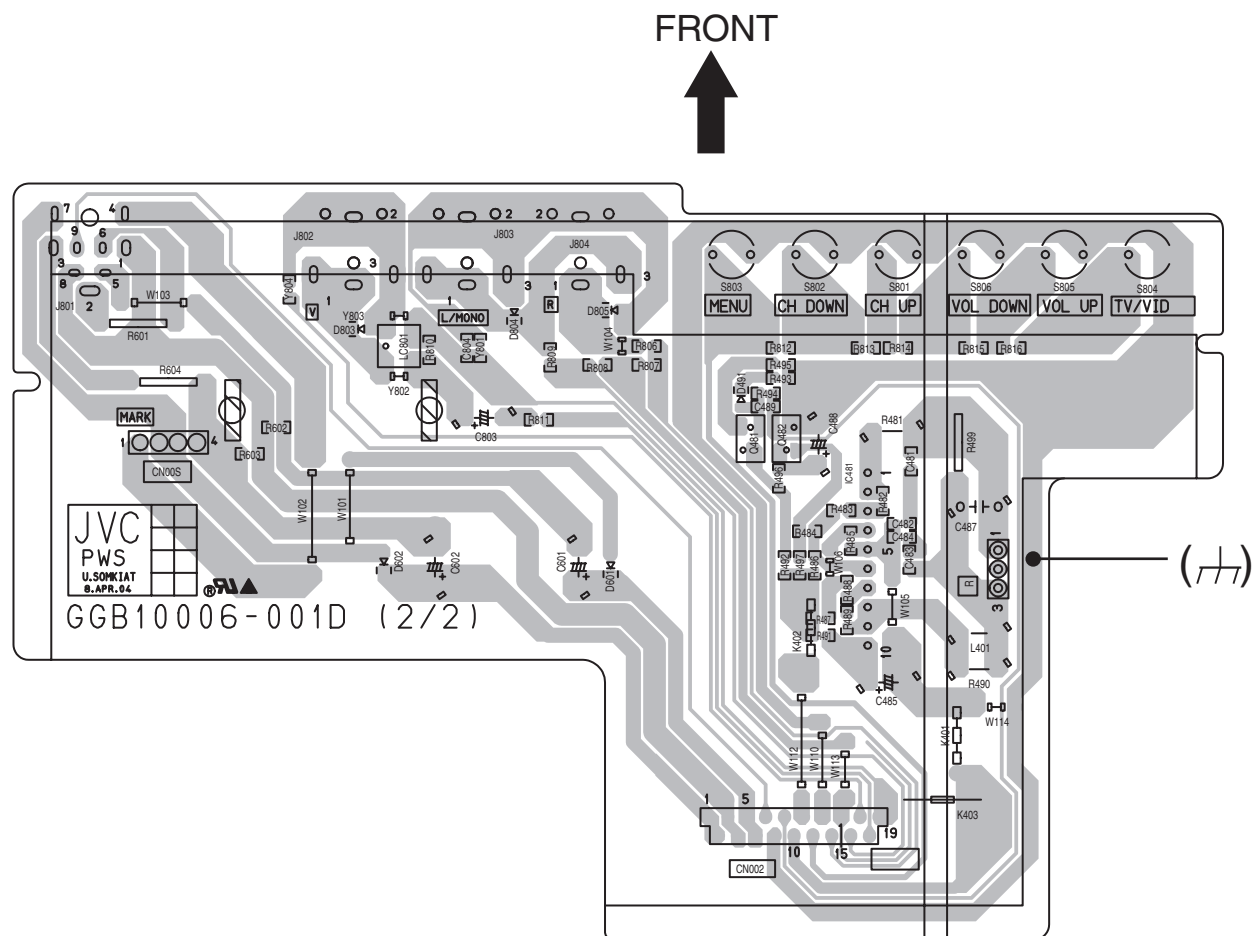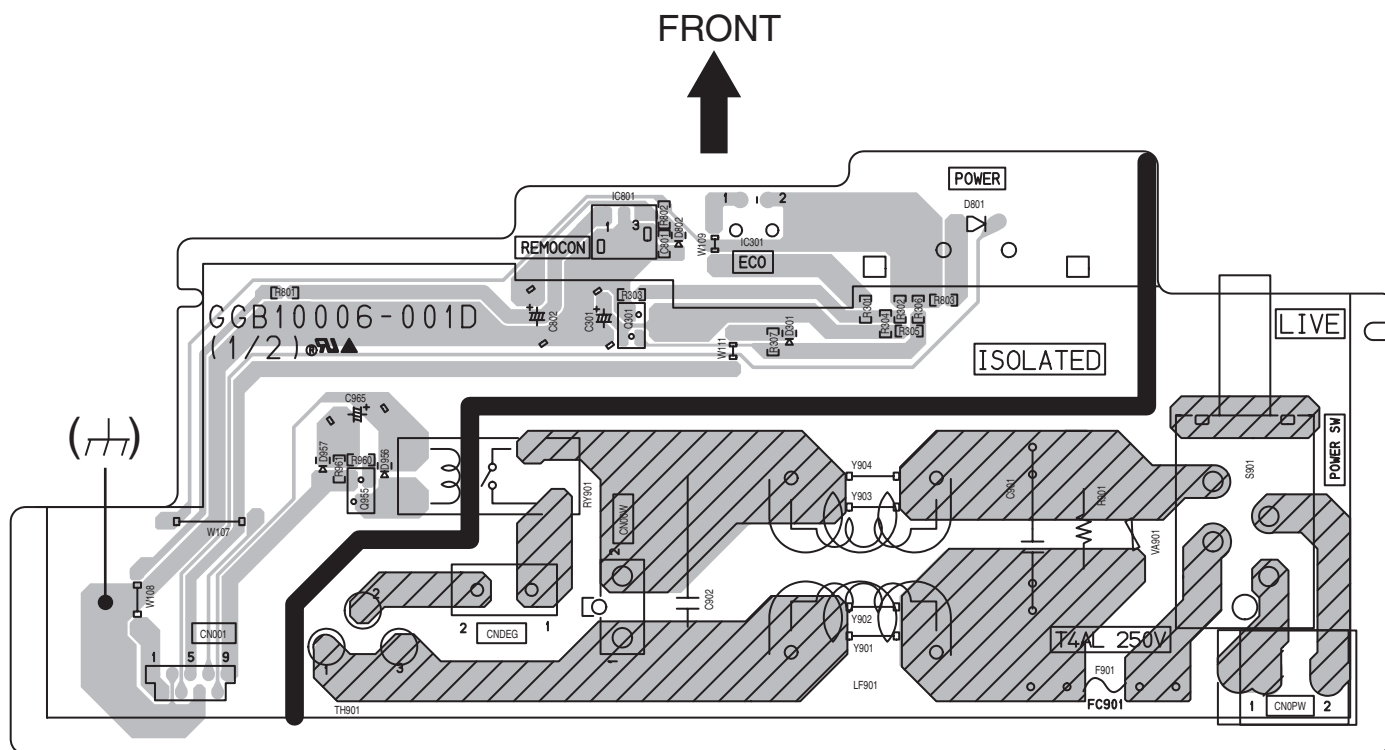

VOLTAGE CHARTS

<MAIN PWB>

PIN NO.	VOLTAGE(V)
IC401	
1	0.5
2	13.8
3	-11.7
4	-13.3
5	0
6	14.1
7	0.6
IC451	
1	1.6
2	4.2
3	4.1
4	0
5	2.2
6	2.2
7	4.4
8	11.8
IC601	
1	0
2	0
3	31.0
4	0
5	0
6	0
7	15.6
8	0.6
9	0
10	32.4
11	19.1
12	15.6
IC701	
1	0
2	0
3	1.7
4	3.2
5	3.2
6	0
7	3.2
8	0
9	3.2
10	1.6
11	1.5
12	0
13	0
14	0
15	0
16	1.9
17	0
18	0
19	0
20	2.3
21	2.1
22	1.4
23	1.4
24	1.9
25	1.9
26	2.4
27	2.0
28	0
29	1.9
30	1.9
31	2.0
32	1.8
33	0.6
34	2.2
35	2.1
36	0
37	3.5
38	2.3
39	2.5
40	0
41	2.0
42	1.8
43	2.0
44	0
45	8.3
46	0
47	4.9
48	1.2
49	2.2
50	2.2
51	1.4
52	1.6
53	2.2
54	2.2
55	1.4
56	2.2
57	0
58	0
59	0
60	3.6
61	3.5
62	3.6
63	3.5
64	0

PIN NO.	VOLTAGE(V)
65	2.0
66	0.3
67	1.6
68	0
69	4.9
70	1.3
71	1.4
72	1.3
73	1.9
74	1.7
75	0.1
76	0
77	3.2
78	1.2
79	1.2
80	0
81	0
82	4.9
83	2.3
84	3.7
85	1.9
86	2.0
87	2.0
88	3.2
89	0
90	3.2
91	1.5
92	0
93	1.8
94	3.1
95	0
96	1.7
97	3.1
98	0
99	0
100	1.8
101	0
102	3.2
103	3.2
104	0.7
105	0
106	0
107	0
108	1.9
109	1.9
110	3.2
111	1.6
112	3.2
113	0
114	3.2
115	0
116	2.6
117	1.8
118	1.8
119	3.2
120	3.1
121	0
122	3.2
123	0
124	1.8
125	0
126	3.2
127	3.1
128	3.1
IC1702	
1	0
2	0
3	0
4	0
5	3.1
6	3.0
7	0
8	3.2
IC1921	
1	297.5
3	0
4	19.9
5	0.2
6	1.0
7	1.3
IC1951	
1	135.3
2	24.9
3	0
IC1972	
1	6.4
2	0
3	3.3
IC1973	
1	15.8
2	11.8
3	0
4	2.8

PIN NO.	VOLTAGE(V)
IC974	
1	0
2	0
3	0
4	0.5
5	2.9
6	0
7	3.2
IC976	
1	1.8
2	0
3	0
4	0.5
5	2.9
6	0
7	3.2
Q101	
E	2.1
C	11.6
B	2.9
Q102	
E	0
C	0
B	3.1
Q103	
E	0
C	0
B	3.1
Q104	
E	0
C	19.7
B	0.5
Q521	
E	0
C	0
B	1.6
Q522	
E	0
C	131.0
B	-0.1
Q571	
E	135.2
C	0
B	134.9
Q572	
E	0
C	3.2
B	0
Q601	
E	8.2
C	0.2
B	8.2
Q602	
E	0.2
C	-0.3
B	0
Q603	
E	0
C	0
B	-0.4
Q605	
E	0
C	0
B	-0.3
Q607	
E	0
C	0
B	0.6
Q608	
E	0
C	21.6
B	0
Q702	
E	1.3
C	4.7
B	2.0
Q703	
E	3.2
C	0
B	3.2
Q801	
E	1.9
C	0
B	1.2
Q803	
E	0
C	0
B	-0.4
Q804	
E	0
C	0
B	-0.5

PIN NO.	VOLTAGE(V)
Q805	
E	0.2
C	-0.5
B	0
Q921	
E	20.4
C	53.8
B	20.8
Q951	
E	0
C	28.3
B	0.1
Q952	
E	0
C	0
B	0.7
Q957	
E	0
C	30.3
B	0.1
Q958	
E	30.4
C	6.4
B	30.3
TU001	
1	2.2
2	3.7
3	0
4	1.9
5	1.9
6	4.9
7	4.9
8	0
9	35.0
10	0
11	0

<CRT SOCKET PWB>


PIN NO.	VOLTAGE(V)
IC351	
1	2.0
2	2.0
3	2.0
4	0
5	5.0
6	0
7	130.8
8	127.0
9	0
Q203	
E	1.1
C	7.3
B	1.8
Q204	
E	7.0
C	11.8
B	7.3
Q206	
E	7.1
C	0
B	7.3
Q208	
E	125.1
C	64.1
B	124.4
Q209	
E	2.7
C	64.1
B	3.2

<FRONT CONTROL PWB>


PIN NO.	VOLTAGE(V)
IC481	
1	6.2
2	6.2
3	7.3
4	7.4
5	0
6	8.0
7	8.0
8	8.5
9	8.4
10	11.8
IC801	
1	3.1
2	3.2
3	0
Q481	
E	0.8
C	6.6
B	1.4
Q482	
E	7.3
C	0
B	6.6
Q955	
E	0
C	11.8
B	0

WAVEFORMS

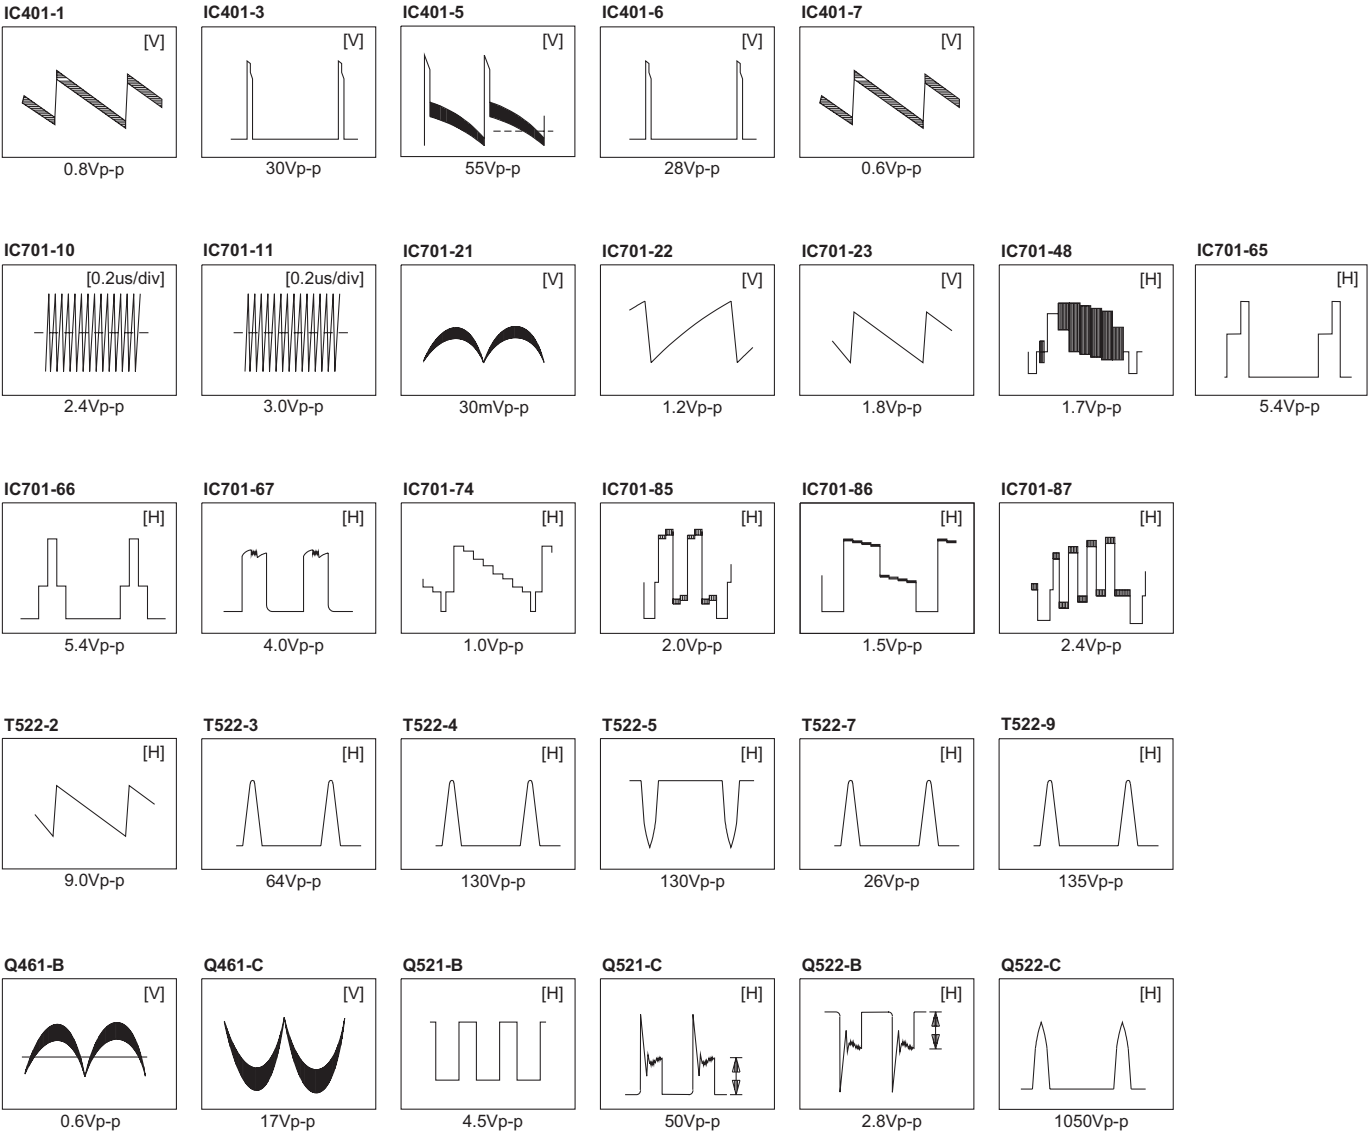-MAIN PWB-



-CRT SOCKET PWB-

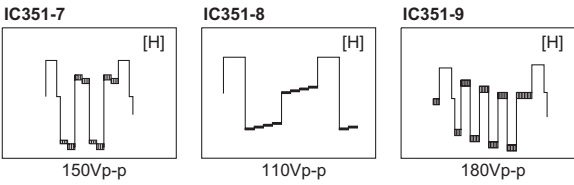



Victor Company of Japan, Limited
AV & MULTIMEDIA COMPANY VIDEO DISPLAY CATEGORY 12, 3-chome, Moriya-cho, kanagawa-ku, Yokohama, kanagawa-prefecture, 221-8528, Japan

