


SCHEMA ELETTRICO

TX – 29AK40D


**DE INGESLOTEN TECHNISCHE
DOCUMENTATIE EN INSTELLINGEN ZIJN
ALLEEN VAN TOEPASSING VOOR
INSTELLINGEN VAN TELEVISIE SETS OP
DE ITALIAANSE MARKT.**

SINTONIZZATORE PER TV

TENSIONI AI PIN DEL SINTONIZZATORE

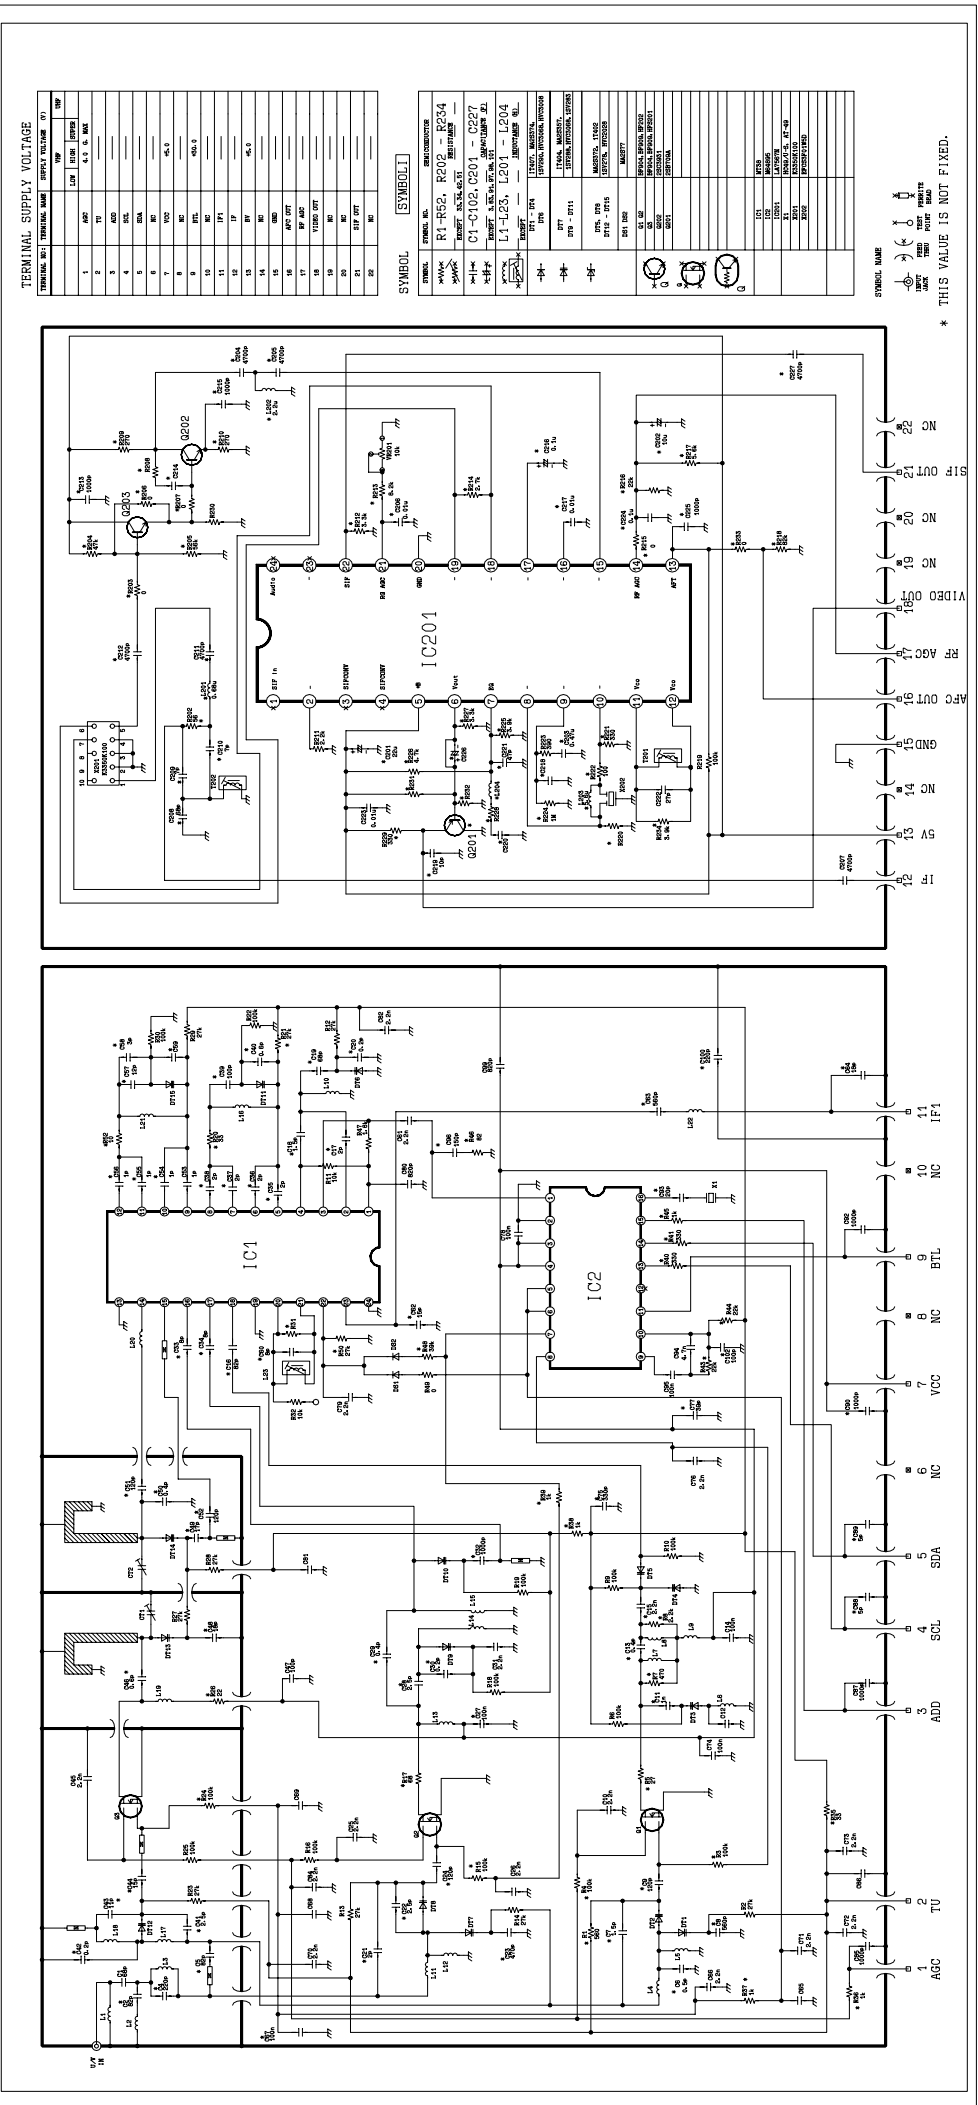


TELECOMANDO

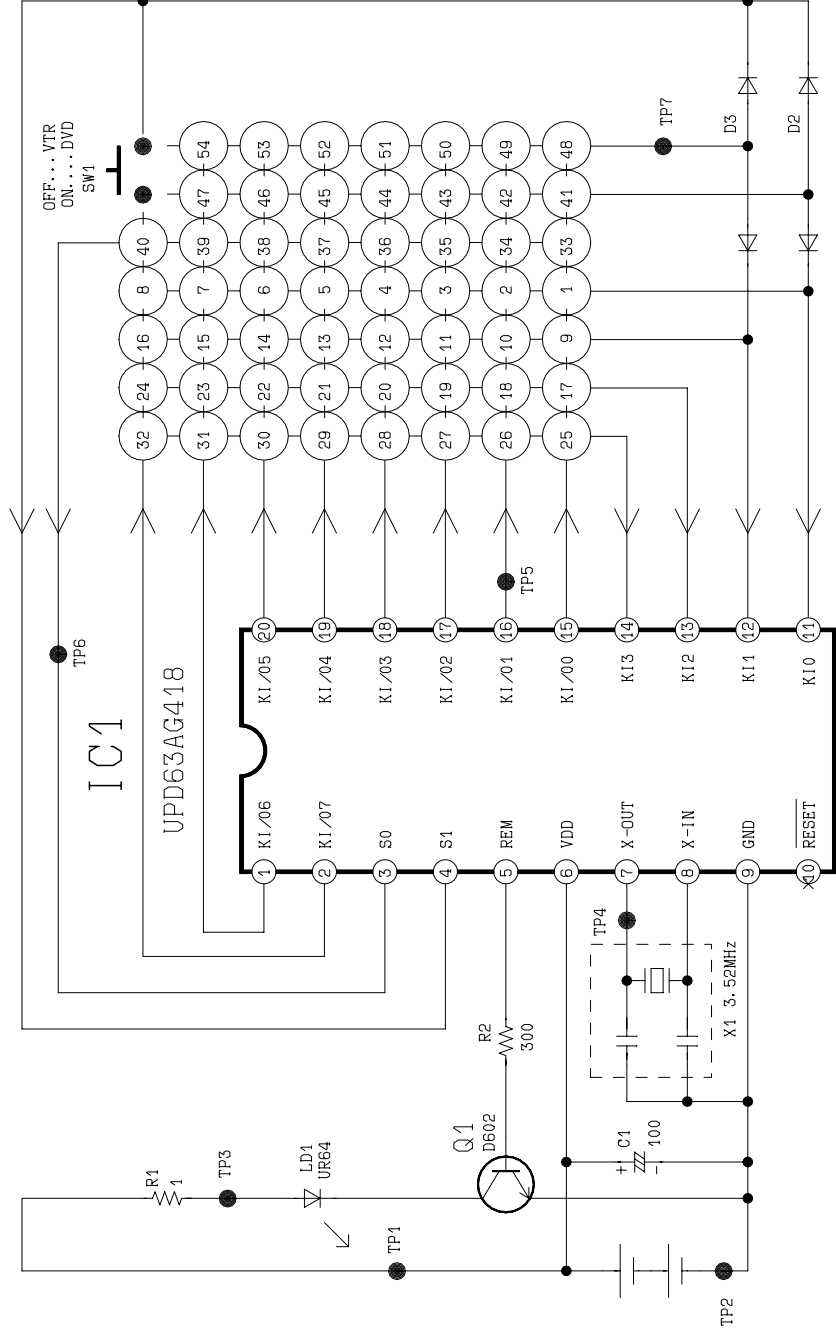

SCHEMA-G


JK3102

TJB16656

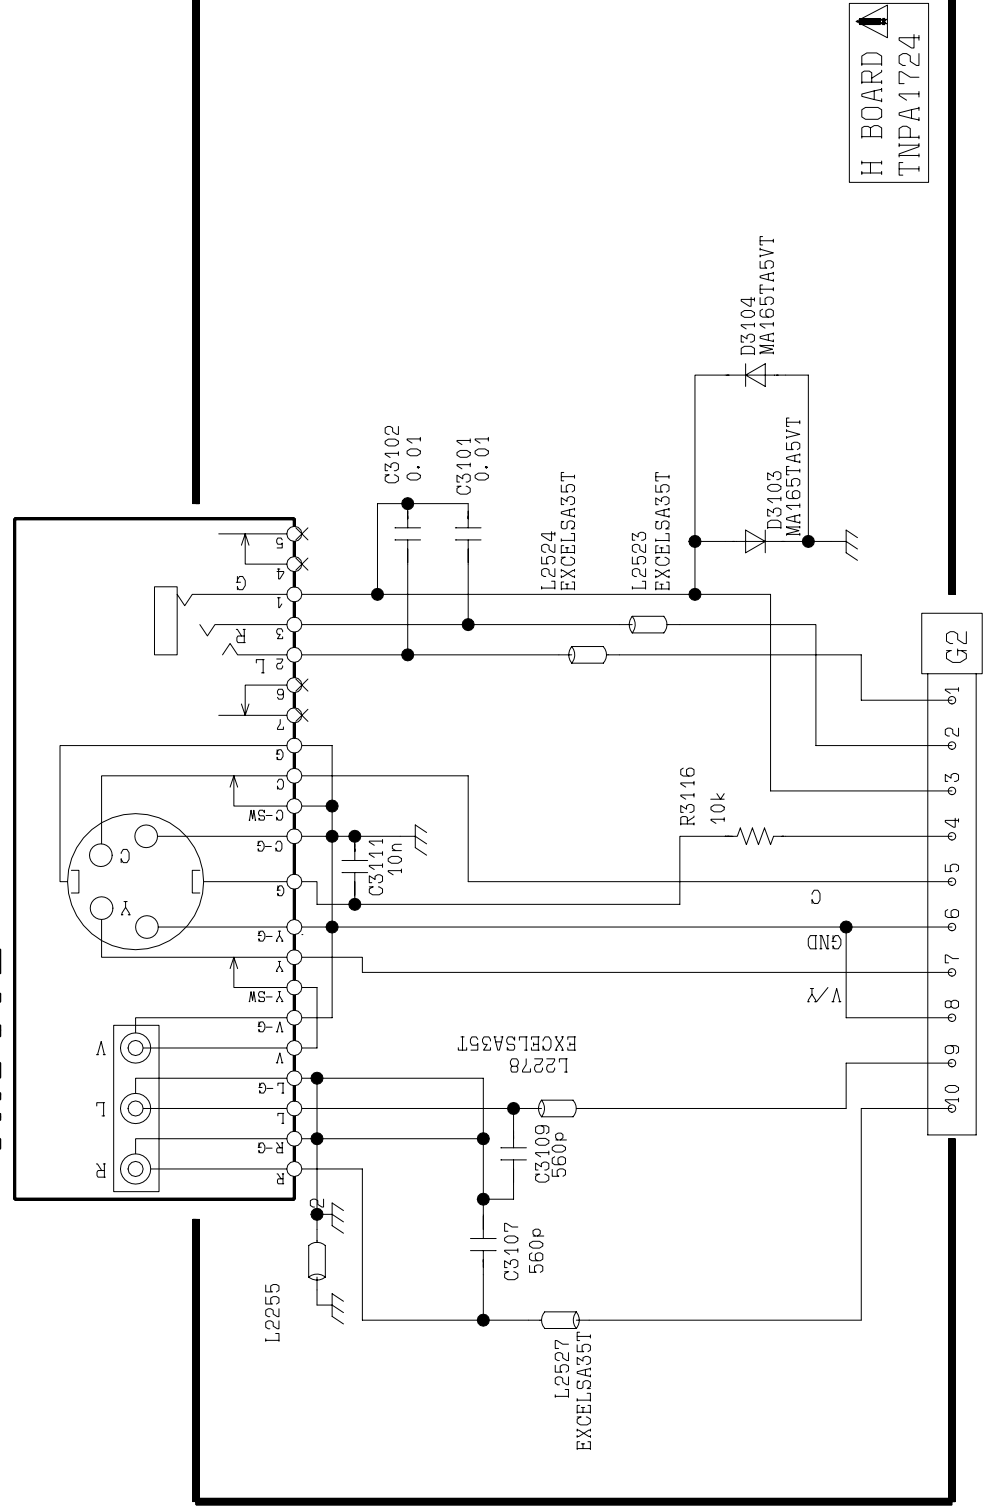


H BOARD
TNPA1724


SCHEMA-K

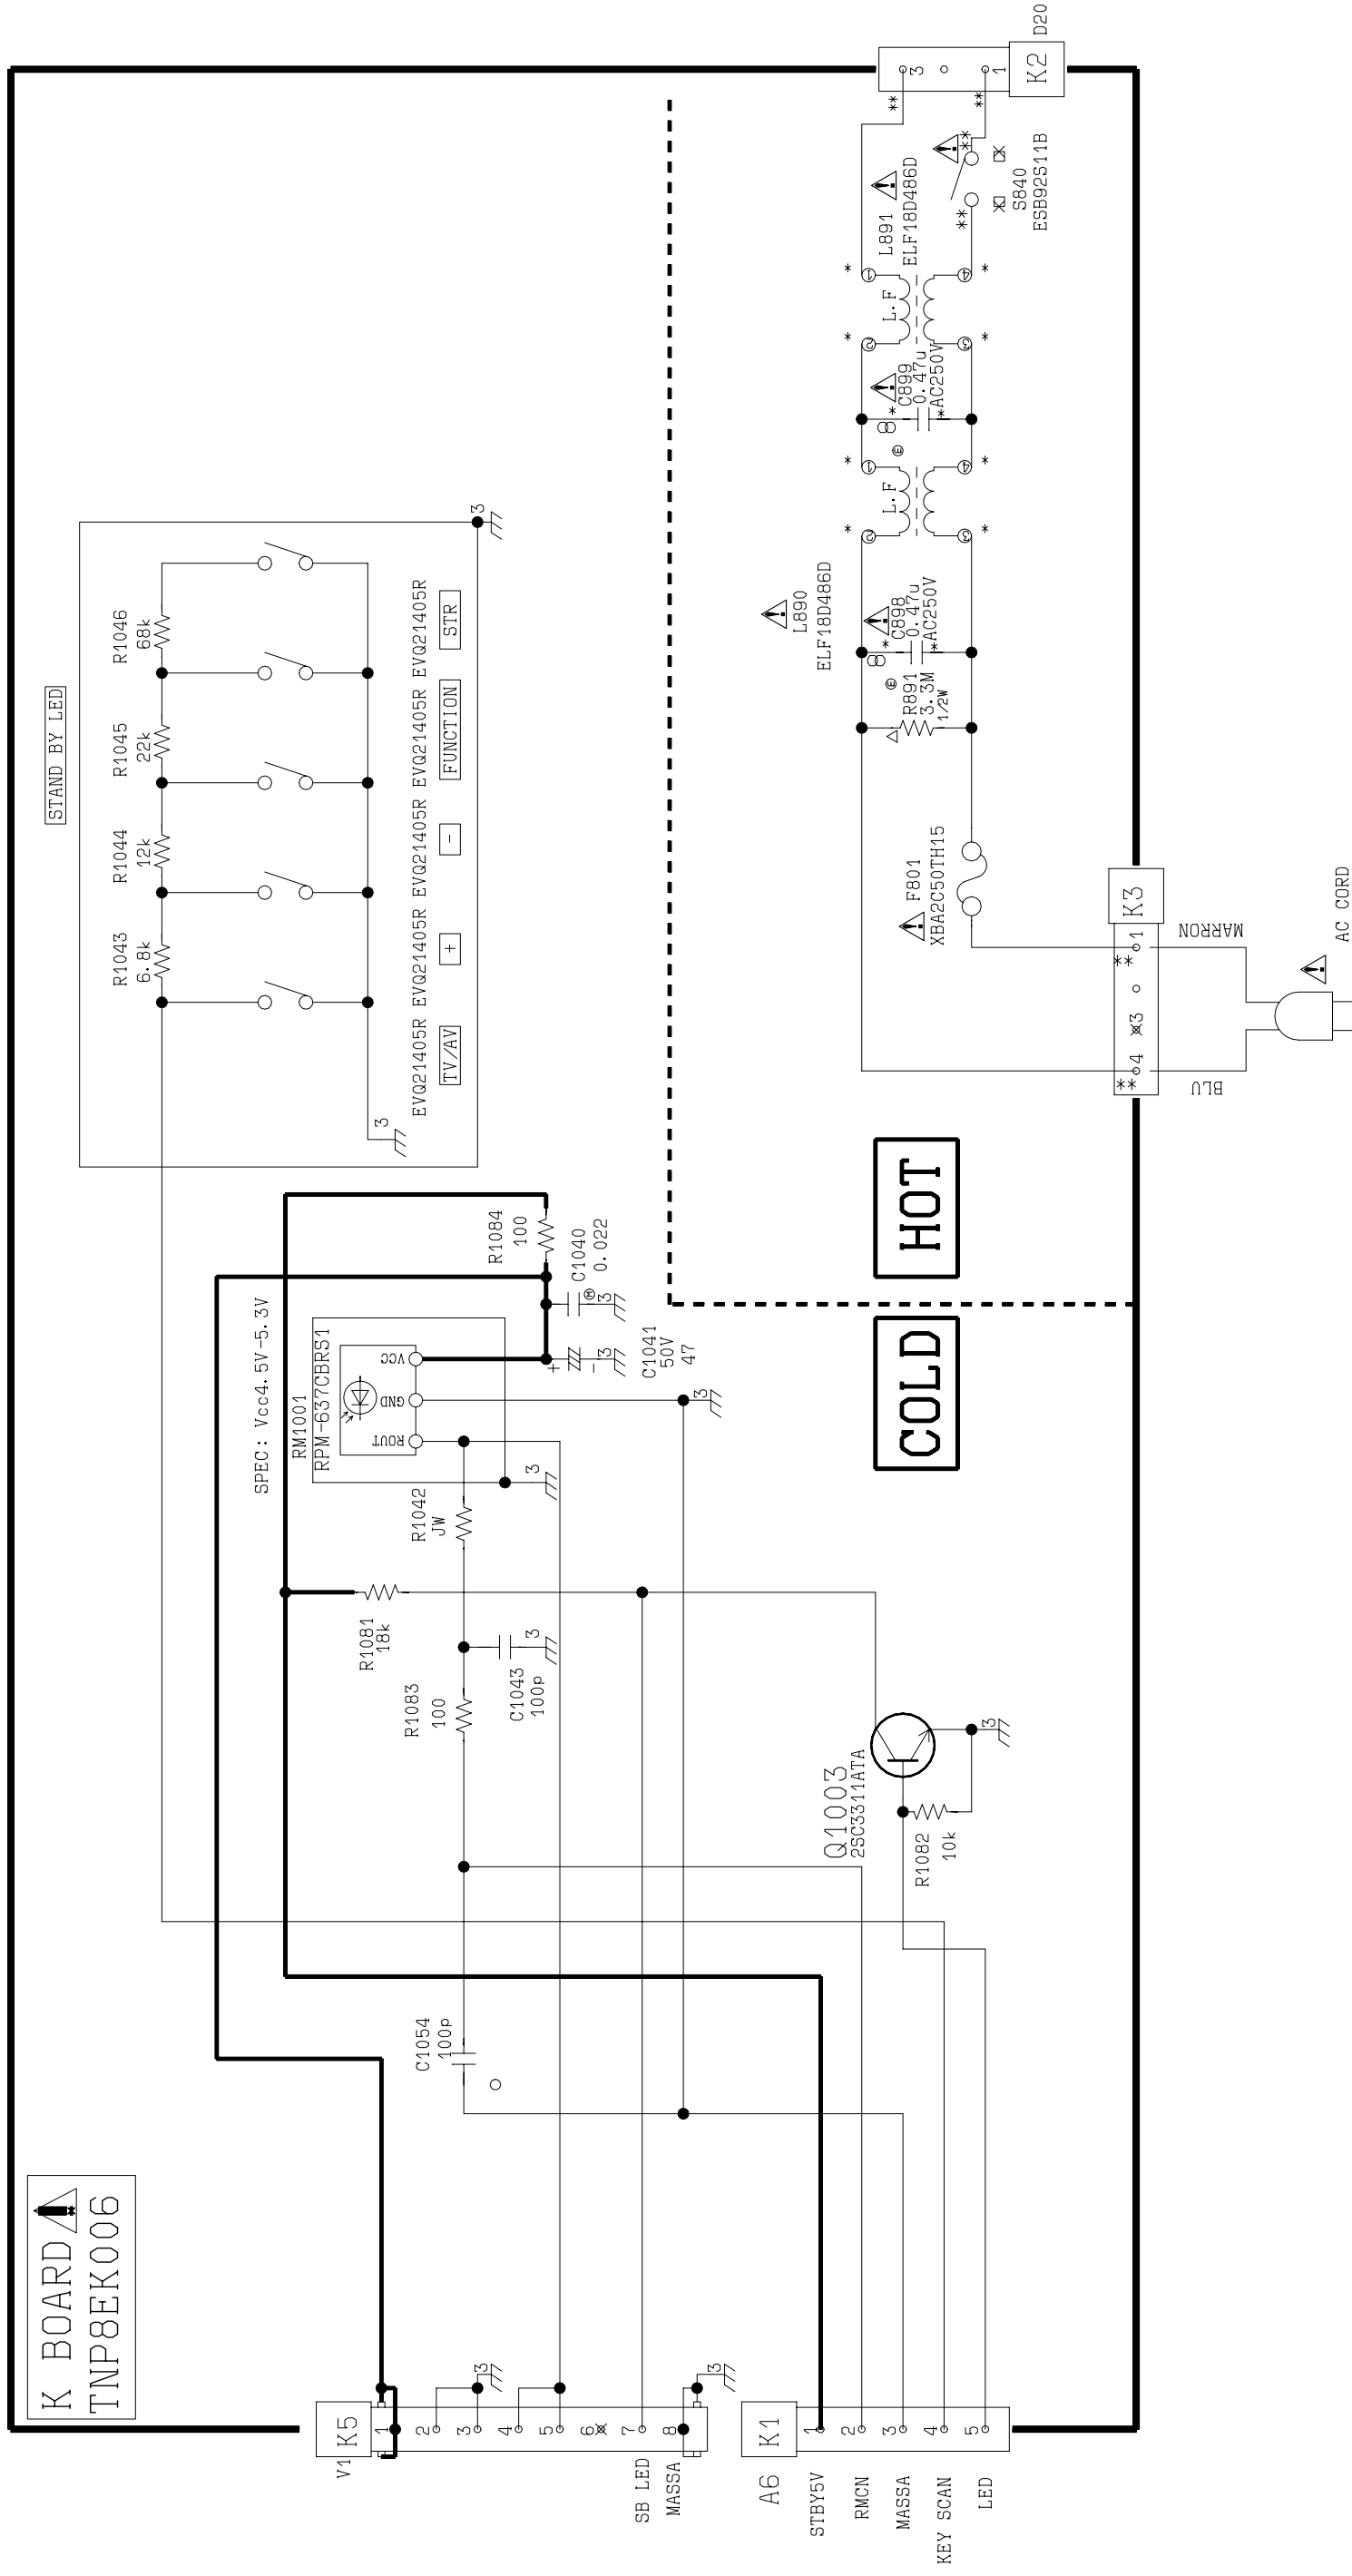


SCHEMA - V

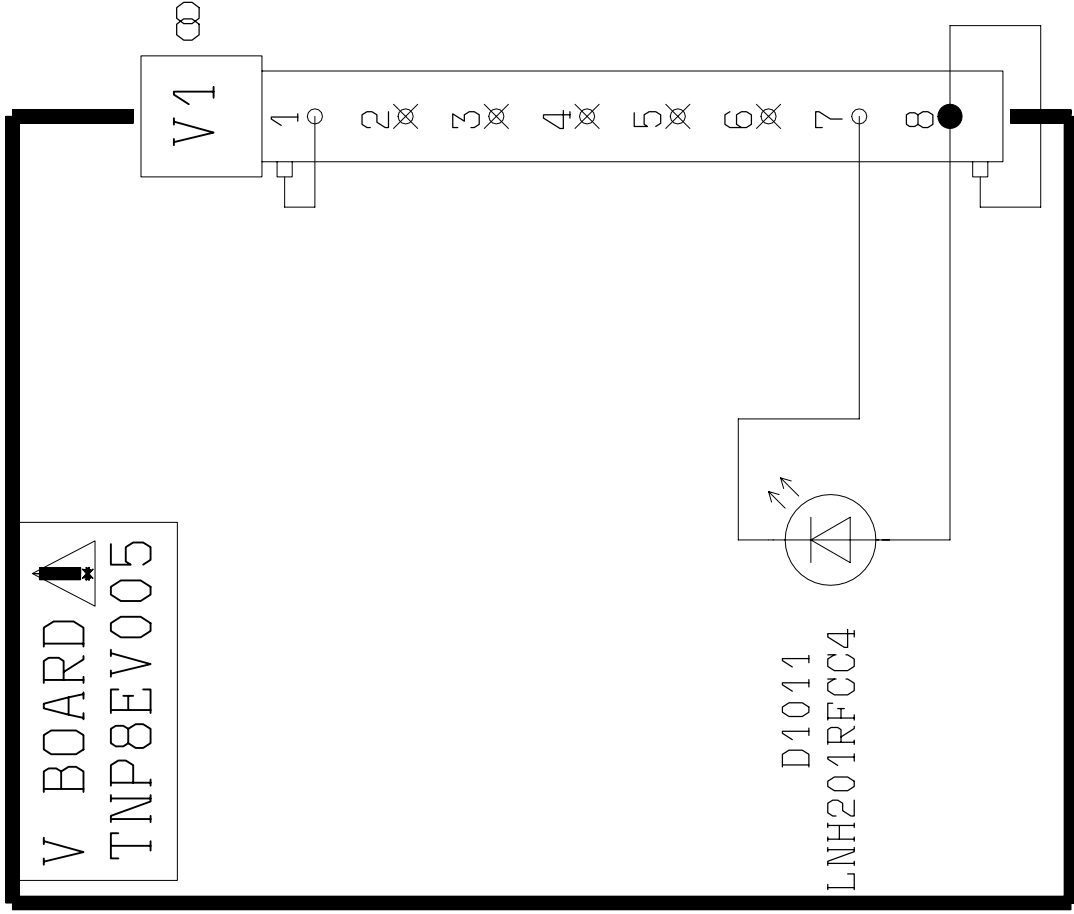

L BOARD
TNPA1726

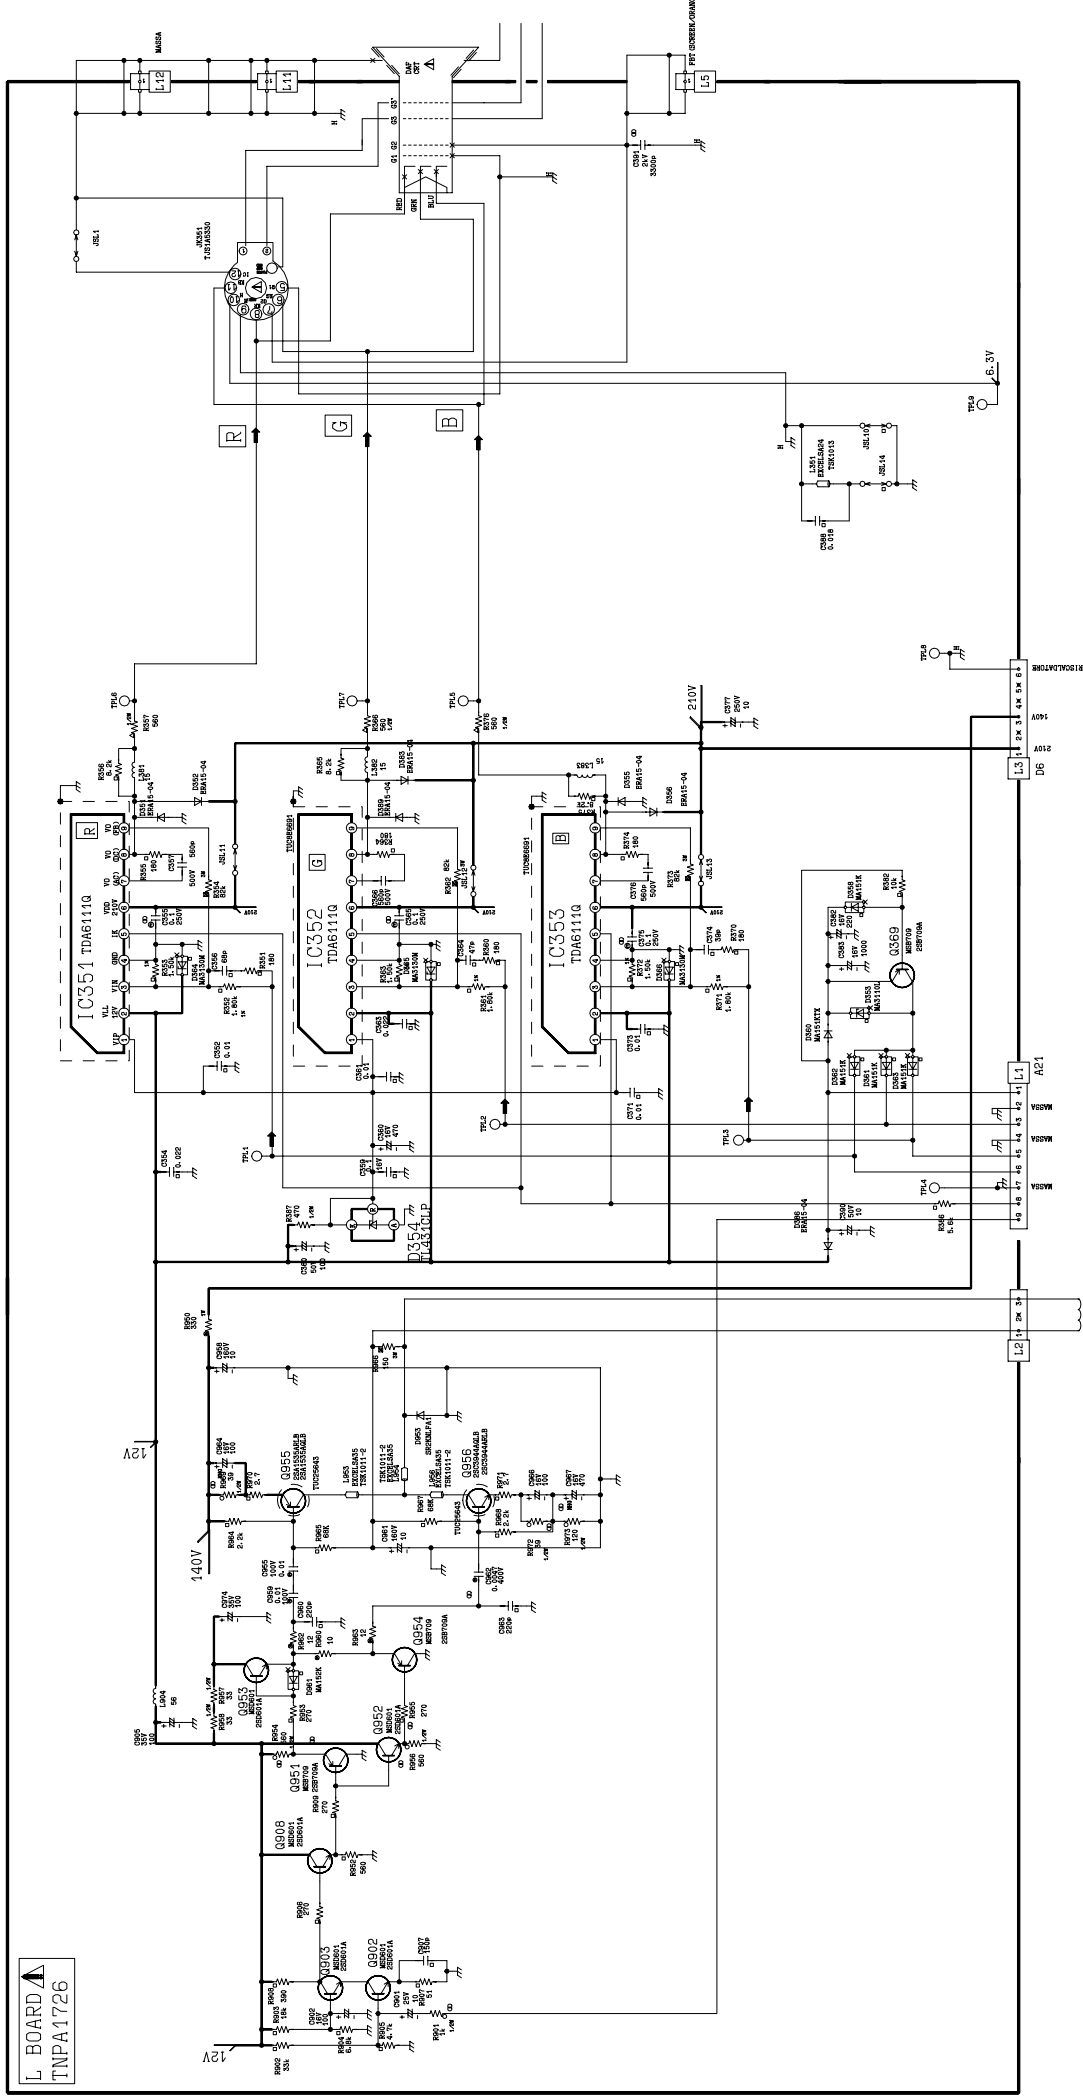

U BOARD
TNPA2042

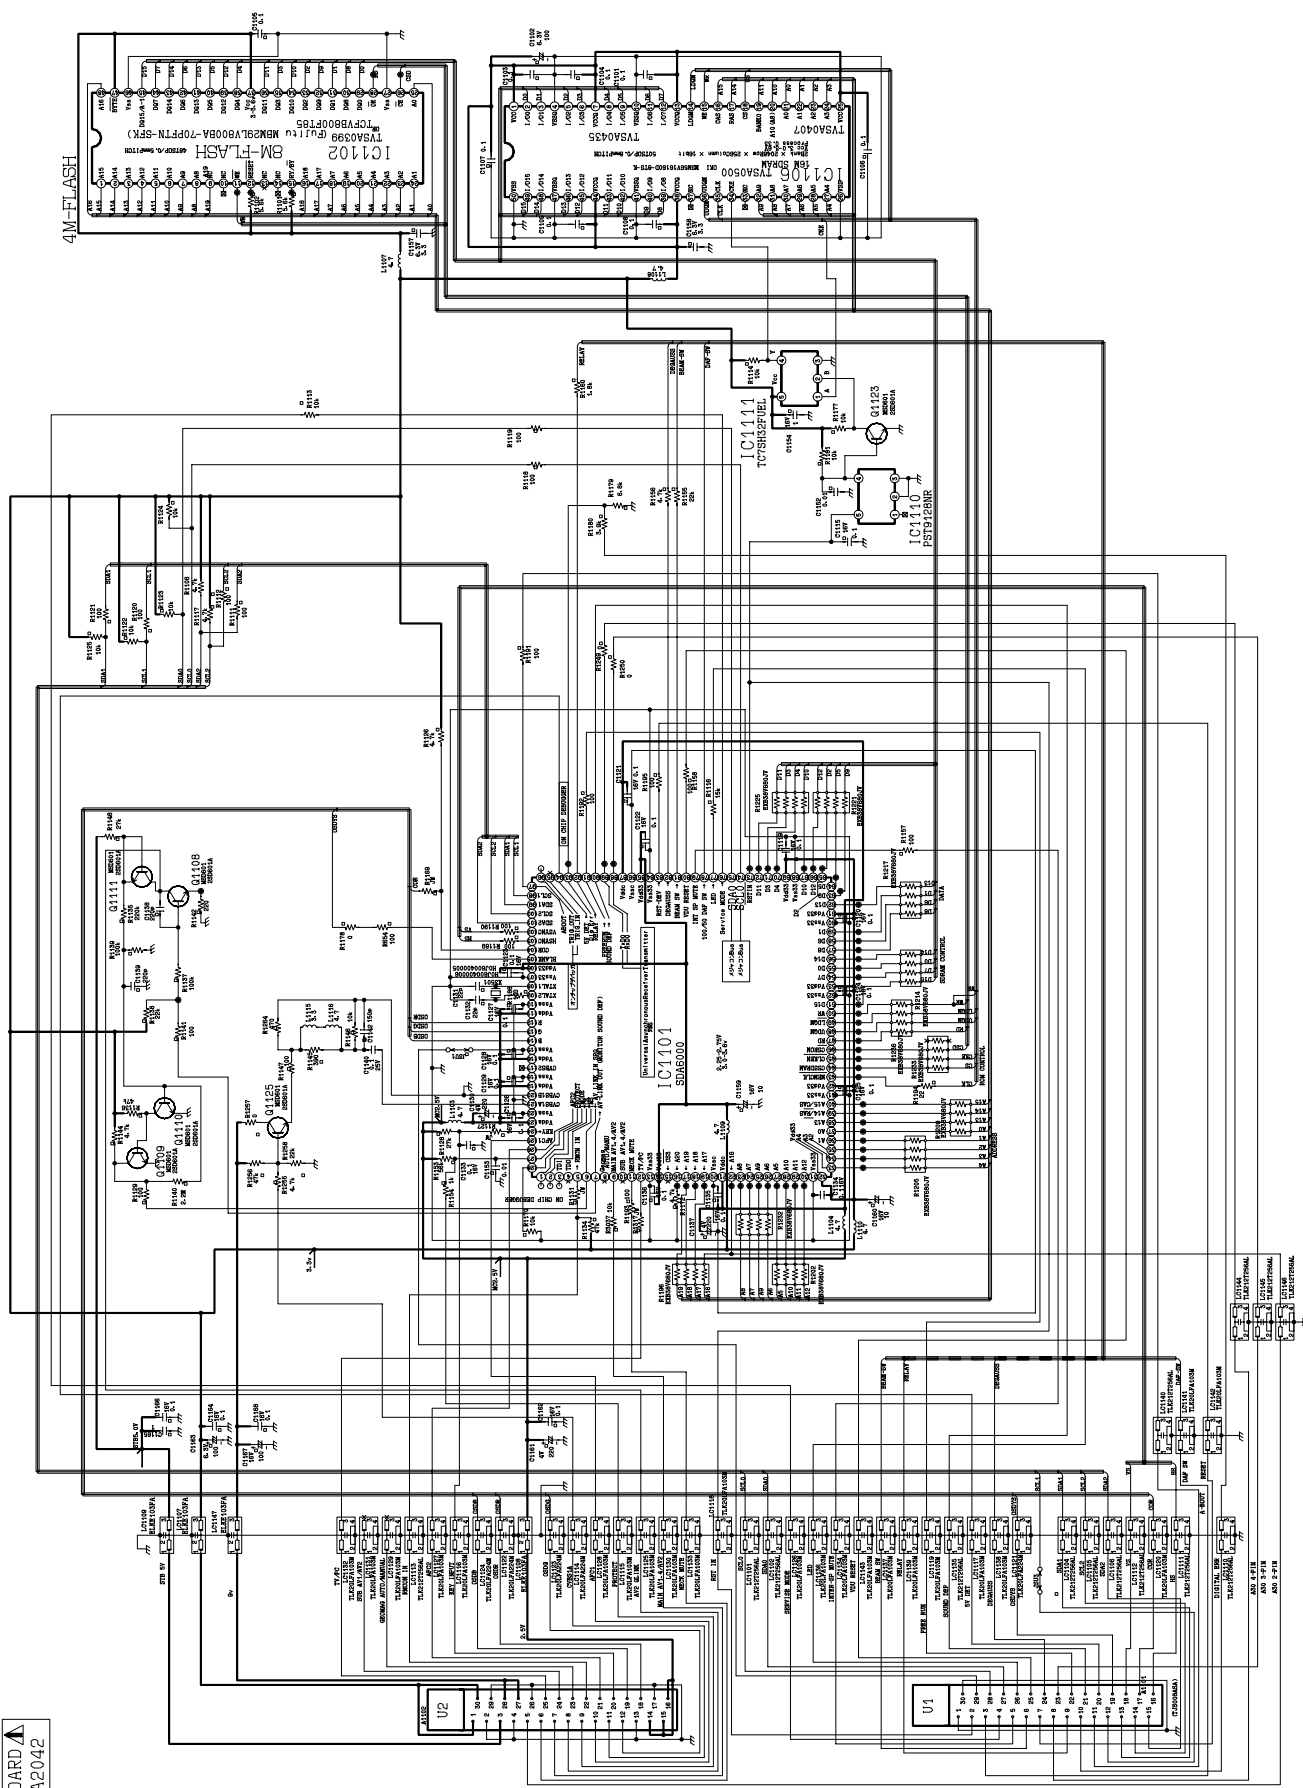

1

TUC8E6743 L/R

DATE
172/1-11-03

100

10V

10k


10k

10V

Output

Q1

SCHEMA-D

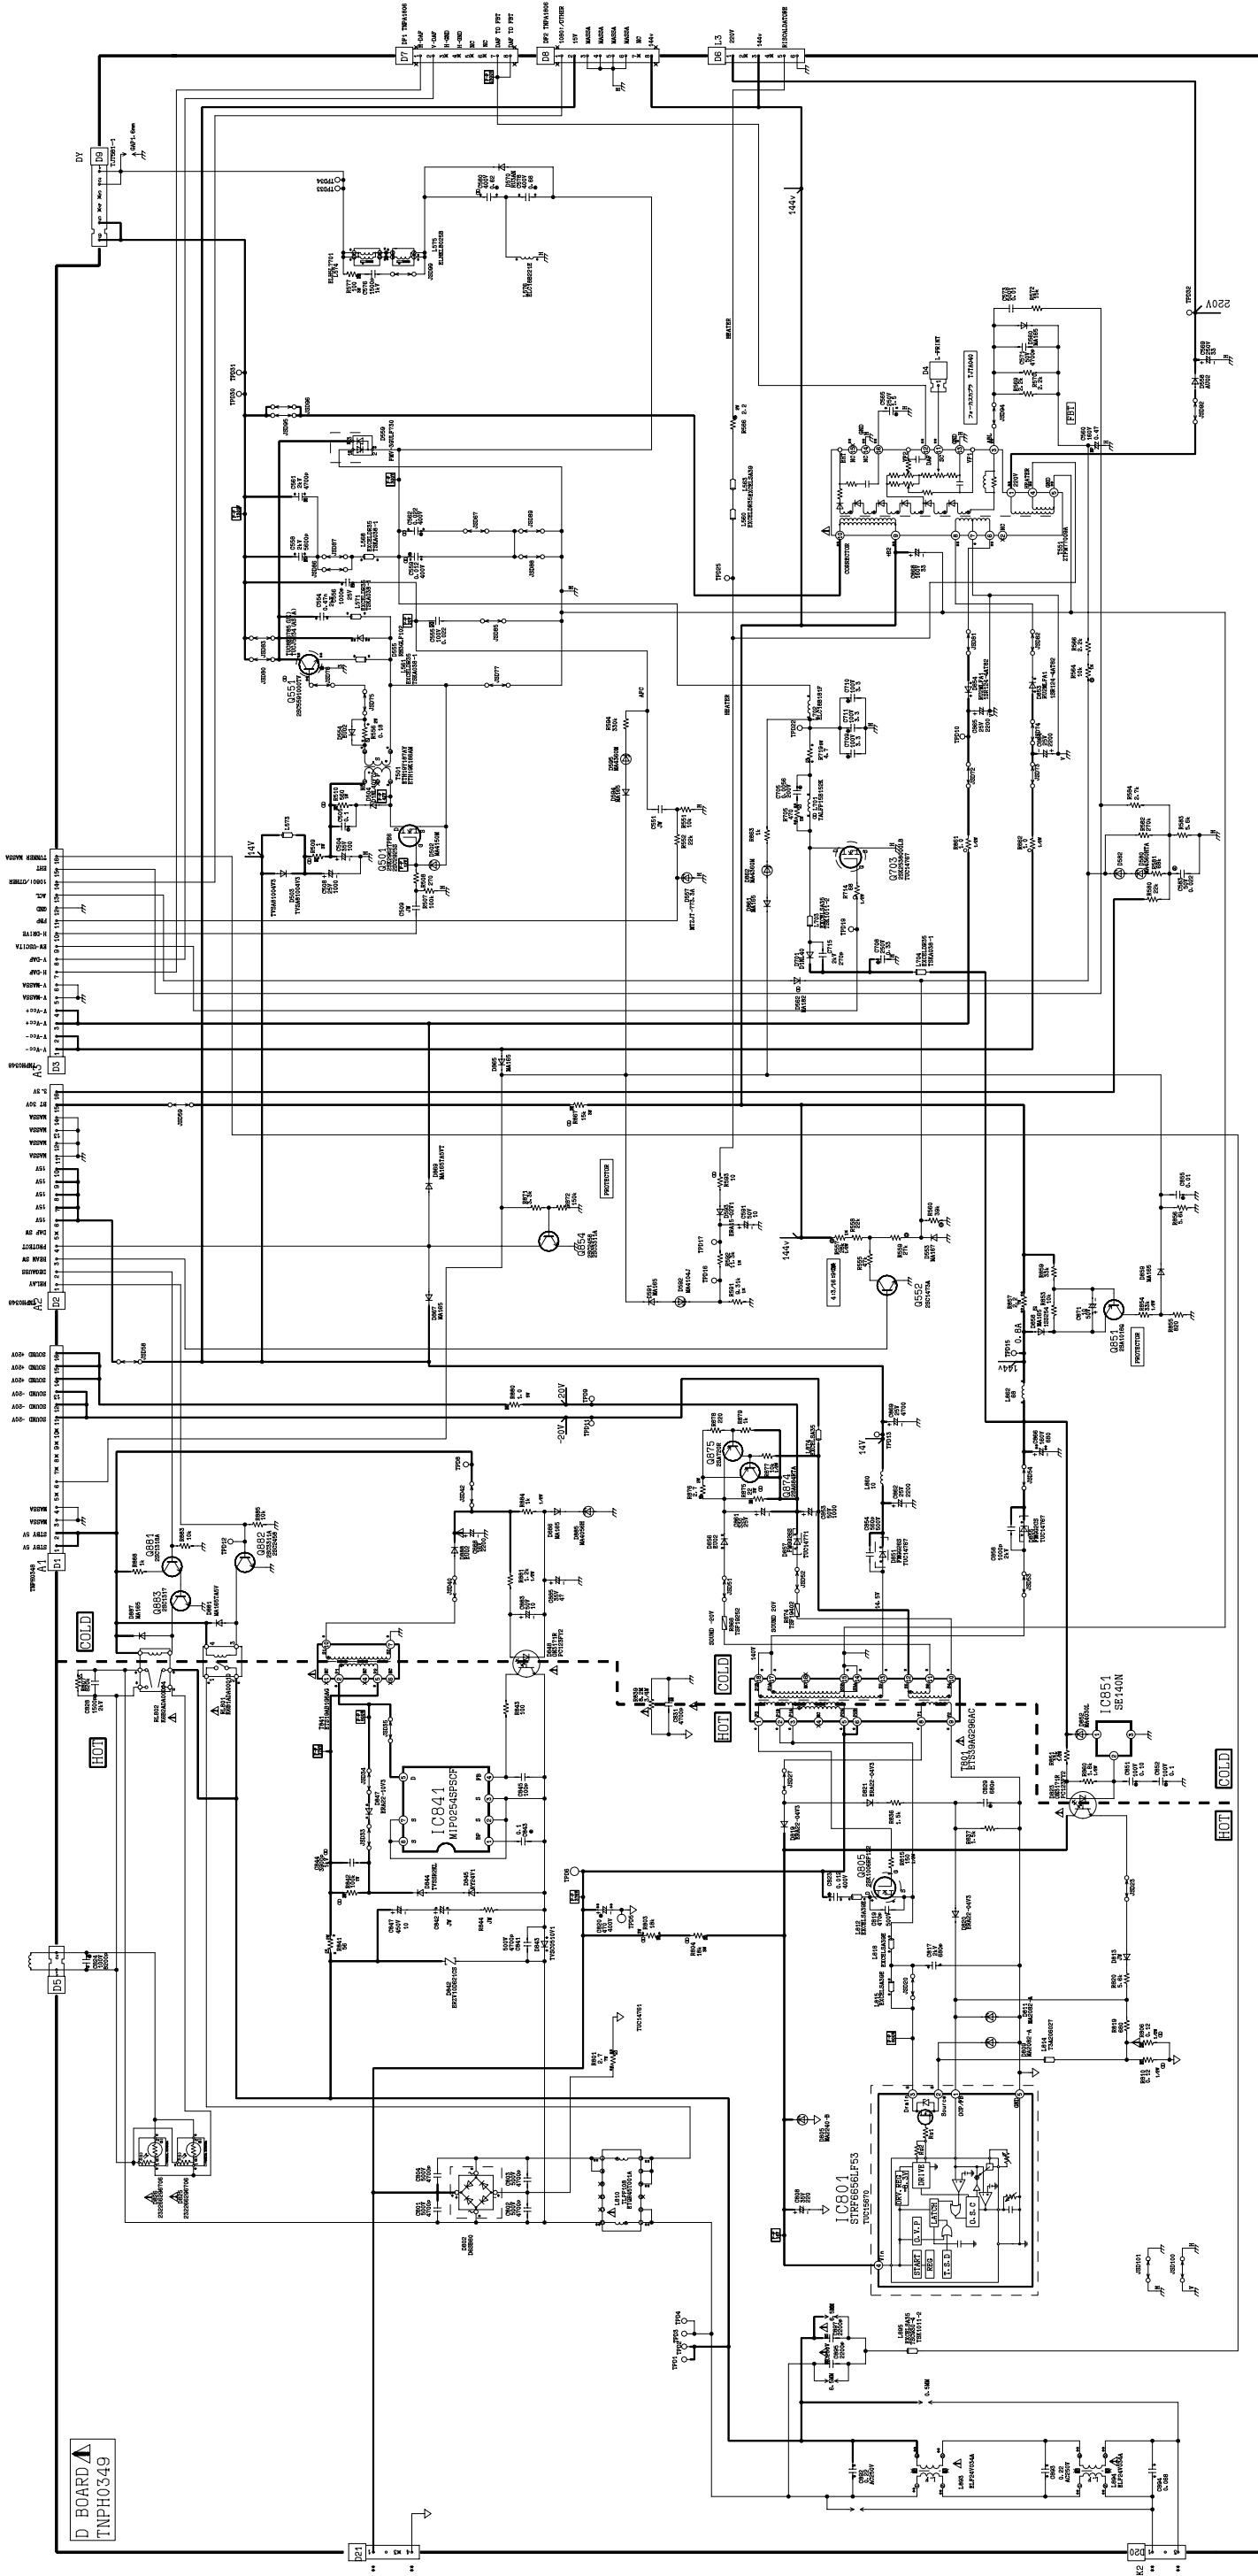

REPLACEMENT PARTS LIST

Important Safety Notice

Components Identified by  mark have special characteristics important for safety.
* When replacing any of these components, use only manufacturers specified parts.
In case of ordering these spare parts, please always add the complete Model-Type number to your order.

Cct Ref	Parts Number	Description	
EXPLODED VIEW			
1	A68ELO10X71	C.R.T.	
2	EAB10106DL2	LEFT SPEAKER	
3	EAB10106DR2	RIGHT SPEAKER	
4	ENG29507G	TUNER	
5	ENG29C01G	TUNER	
6	EUR511224	REMOTE CONTROL	
7	TBMA059	PANASONIC BADGE	
8	TBXA20001	POWER BUTTON	
9	THT1062	CRT FIXING SCREW	
10	TKP8E1297	DOOR LID LEFT	
11	TKP8E1298	DOOR LID RIGHT	
12	TKU8E00500	BACK COVER	
13	TKY8E430	CABINET	
14	TMW8E039	CONTROL BRACKET	
15	TMX8E050	CHASSIS FRAME	
16	TNP8EG001AA	G P.C.B.	
17	TNP8EK006AA	K P.C.B.	
18	TNP8EV005AA	V P.C.B.	
19	TNPA1724AB	H P.C.B.	
20	TNPA1726AB	L P.C.B.	
21	TNPA1965AE	DG P.C.B.	
22	TNPA2042AF	U P.C.B.	
23	TNPH0348AL	A P.C.B.	
24	TNPH0349AD	D P.C.B.	
25	TQF8E3115	MODEL LABEL	
26	TXASX01BXQG	AC CORD	
27	TXFLK01CQYG	DEGAUSS COIL	
28	TXJF0C0CJFG	FOCUS LEAD ASSEMBLY	
29	UR51EC904A	BATTERY COVER (REMOTE)	
30	ZTBZAD550A	ANODE CABLE	
31	ZTFM77020A	FBT	
MISCELLANEOUS COMPONENTS			
.	TBLG3019	SET FOOT (FRONT)	
.	TBLG3020	SET FOOT (REAR)	
.	TBM8E1930	PRESET LABEL RIGHT	
.	TBM8E1931	PRESET LABEL LEFT	
.	TBM8E2194	AV LABEL	
.	TEK6940	LID CATCH	
.	TES2298	CRT EARTH SPRING	
.	TES8E019	POWER BUTTON SPRING	
.	TKP8E1325	AV COVER	
.	TKPA28301	ORNAMENTAL PANEL	
.	TKPA28603	FRONT PANEL	
.	TLK8E05150	CANCELLATION COIL	
.	TLK8E05164	GEOMAGNETIC COIL	
.	TMX8E035	POWER BUTTON JOINT	
.	TPC8E4878	OUTER CARTON	
.	TPD8E699	TOP CUSHION	
.	TPD8E700	BOTTOM CUSHION	
.	UM-3DJ-2P	BATTERY PACK	

Cct Ref	Parts Number	Description	
INSTRUCTION BOOKS			
.	TQB8E3160A	GERMAN	
.	TQB8E3160C	ITALIAN	
.	TQB8E3160D	FRENCH	
I.C.s			
D354	TL431CLPM	REGULATOR	
IC051	AN7805FLB	5V REGULATOR	
IC351	TDA6111Q-N4	RGB OUTPUT	
IC352	TDA6111Q-N4	RGB OUTPUT	
IC353	TDA6111Q-N4	RGB OUTPUT	
IC451	LA7845N	VERTICAL OUTPUT	
IC459	TC74HC221AF	MULTIVIBRATOR	
IC501	NJM2903MTE1	AUDIO AMPLIFIER	
IC801	STRF6656LF53	POWER SUPPLY	
IC841	MIP0254SPSCF	POWER SUPPLY SWITCHING	
IC851	SE140N	ERROR AMPLIFIER	
IC1051	RPM6937	LED RECEIVER	
IC1101	SDA6000-A23	MICRO PROCESSOR	
IC1102	E2F5/020/05	EEPROM *	
IC1104	X24BR200-1ED	EAROM *	
IC1105	S-80843ALY-Z	5V REGULATOR	
IC1106	TVSA0500	SDRAM	
IC1107	TC7MBD3245FK	CONVERTER	
IC1108	AN78L05TA	5V REGULATOR	
IC1109	PST9119NR	SYSTEM RESET	
IC1251	SI-3033C	3.5V REGULATOR	
IC1252	PQ30RV21B	2.5V REGULATOR	
IC1253	M62392FP70BC	D/A CONVERTER	
IC1254	PST9128NR	RESET	
IC1301	C1AB00001468	VIDEO PROCESSOR	
IC1303	C1AB00001282	VIDEO PROCESSOR	
IC1304	C1AB00001230	VIDEO PROCESSOR	
IC1305	SDA9415	SCAN RATE CONVERTOR	
IC1306	MM1065ZMR	3.3V REGULATOR	
IC1307	MM1065ZMR	3.3V REGULATOR	
IC1309	MM1065ZMR	3.3V REGULATOR	
IC1310	TC7WH241FUEL	VIDEO PROCESSOR	
IC1311	MM1065ZMR	3.3V REGULATOR	
IC1312	NJM2904VTE1	AUDIO AMPLIFIER	
IC1314	NJM2904MTE1	AUDIO AMPLIFIER	
IC1315	AN5394FB	R.G.B. PROCESSOR	
IC1316	MB87F1720	CIP	
IC2001	MSP3410DQAC5	M.S.P.	
IC2301	TDA7490	AUDIO AMPLIFIER	
IC2302	AN7108	H.P. AMPLIFIER	
IC2303	AN6554NSF-E2	OPERATIONAL AMPLIFIER	
IC2306	AN6554NSF-E2	OPERATIONAL AMPLIFIER	
IC2705	PQ1CG21H2RZ	REGULATOR	
IC2706	PQ1CG21H2RZ	REGULATOR	
IC2707	AN7808LB	8V REGULATOR	
IC2708	SI-8090K	POWER SUPPLY	
IC2709	PQ1CG21H2RZ	REGULATOR	

Cct Ref	Parts Number	Description
IC3001	CXA2069Q-TL	SWITCHING
IC3002	TDA8601T/C1	12V REGULATOR
IC3003	CXA1211M-T4	VIDEO AMPLIFIER
IC3302	L78M12MRB	12V REGULATOR
IC4801	AN6564NS-E1	OPERATIONAL AMPLIFIER
IC4802	PUB4301	GEOMAGNETIC CORRECTION
FUSES		
F801-2	EYF52BC	FUSE HOLDER
F801-1	EYF52BC	FUSE HOLDER
F801	XBA2C50TH15	FUSE
DIODES		
D001	MA4020	DIODE
D002	MA4020	DIODE
D003	MA3150HTX	DIODE
D004	MA3150HTX	DIODE
D010	MA152KTX	DIODE
D051	MA4020	DIODE
D052	MA4020	DIODE
D053	MA152KTX	DIODE
D351	ERA15-04V3	DIODE
D352	ERA15-04V3	DIODE
D353	MA3110LTX	DIODE
D355	ERA15-04V3	DIODE
D356	ERA15-04V3	DIODE
D358	MA151ATX	DIODE
D360	ERA15-02V3	DIODE
D361	MA151ATX	DIODE
D362	MA151ATX	DIODE
D363	MA151ATX	DIODE
D364	MA3130MTX	DIODE
D365	MA3130MTX	DIODE
D366	MA3130MTX	DIODE
D367	MA3051HTX	DIODE
D368	MA3051HTX	DIODE
D369	MA3051HTX	DIODE
D383	ERA15-04V3	DIODE
D385	ERA22-04V3	DIODE
D386	ERA15-04V3	DIODE
D389	ERA15-04V3	DIODE
D452	MA152KTX	DIODE
D453	EU02AV1	DIODE
D454	MA152KTX	DIODE
D455	MA152KTX	DIODE
D456	ERA22-02V3	DIODE
D465	MA3039HTX	DIODE
D502	MA4150TA	DIODE
D503	ERA81004V3	DIODE
D504	D1NL40V70	DIODE
D553	MA167TA5	DIODE
D554	EU02	DIODE
D555	RH3GLF102	DIODE
D557	MA1033MTA	DIODE
D558	AU02V0	DIODE
D559	FMV-3GULF730	DIODE
D560	MA165TA5	DIODE
D562	MA182TA	DIODE
D570	RU3ANV1	DIODE
D580	MA4360	DIODE
D591	MA165TA5	DIODE
D592	MA4104	DIODE
D593	ERA15-02V3	DIODE
D594	MA165TA5	DIODE
D595	MA4360MTA	DIODE
D701	D1NL40V70	DIODE
D802	D6SB80LF-B	DIODE
D805	MA2240-BLFS	DIODE

Cct Ref	Parts Number	Description
D809	MA2082-ALFS	DIODE
D811	MA2082-ALFS	DIODE
D819	ERA22-04V3	DIODE
D820	ERA22-04V3	DIODE
D821	ERA22-04V3	DIODE
D823	PC123FY2	DIODE
D825	232266296706	THERMISTOR
D826	232266296706	THERMISTOR
D843	ERC0510V1	DIODE
D844	TVSSR2KL	DIODE
D845	RY24V1	DIODE
D847	ERA22-10	DIODE
D848	PC123FY2	DIODE
D851	FMGG26S	DIODE
D852	MA4030LTA	DIODE
D853	RU2AMLFA1	DIODE
D854	RU2AMLFA1	DIODE
D855	FMGG2CS	DIODE
D856	EU02	DIODE
D857	FMGG26S	DIODE
D858	MA165TA5	DIODE
D859	MA165TA5	DIODE
D861	MA165TA5	DIODE
D862	MA4360MTA	DIODE
D865	MA165TA5	DIODE
D867	MA165TA5	DIODE
D869	MA165TA5	DIODE
D881	MA165TA5	DIODE
D885	MA4056HTA	DIODE
D886	MA165TA5	DIODE
D887	MA165TA5	DIODE
D888	EU02	DIODE
D891	ERC0510V1	DIODE
D953	R2KNLFA1	DIODE
D961	MA152KTX	DIODE
D1011	LNH201RFCC5	LED
D1152	MA152KTX	DIODE
D1153	MA152KTX	DIODE
D1302	MA152KTX	DIODE
D1305	MA704ATX	DIODE
D1306	MA3062MTX	DIODE
D1307	MA3091MTX	DIODE
D1308	MA152KTX	DIODE
D1309	MA152KTX	DIODE
D1310	MA3062MTX	DIODE
D1311	MA3062MTX	DIODE
D1312	MA3062MTX	DIODE
D1313	MA3043MTX	DIODE
D1315	MA3043MTX	DIODE
D2040	MA152KTX	DIODE
D2041	MA152KTX	DIODE
D2048	MA152KTX	DIODE
D2301	TVSRM26V1	DIODE
D2302	MTZJT-775.6B	DIODE
D2305	MA3047MTX	DIODE
D2306	MA29TA5	DIODE
D2311	MA1180HTA	DIODE
D2312	MA3130MTX	DIODE
D2313	MA152KTX	DIODE
D2314	MA152KTX	DIODE
D2316	MA152KTX	DIODE
D2711	RK34LFC4	DIODE
D2712	AK04V0	DIODE
D2713	RK34LFC4	DIODE
D2714	RK34LFC4	DIODE
D3003	MA3091LTX	DIODE

Cct Ref	Parts Number	Description
D3004	MA3091LTX	DIODE
D3103	MA165TA5	DIODE
D3104	MA165TA5	DIODE
TRANSISTORS		
Q002	BC857B	TRANSISTOR
Q052	BC857B	TRANSISTOR
Q369	BC857B	TRANSISTOR
Q451	BC847B	TRANSISTOR
Q460	BC847B	TRANSISTOR
Q461	BC847B	TRANSISTOR
Q462	BC847B	TRANSISTOR
Q501	2SK2962TPE6	TRANSISTOR
Q551	2SC5591000RK	TRANSISTOR
Q552	2SC1473ATA	TRANSISTOR
Q703	2SK2538000LB	TRANSISTOR
Q805	2SK2123000LB	TRANSISTOR
Q851	2SA1018QTA	TRANSISTOR
Q854	2SC3311ATA	TRANSISTOR
Q874	2SA684R	TRANSISTOR
Q875	2SA720-RS	TRANSISTOR
Q881	2SC3311ATA	TRANSISTOR
Q882	2SC3311ATA	TRANSISTOR
Q883	2SC1317-TA	TRANSISTOR
Q902	BC847B	TRANSISTOR
Q903	BC847B	TRANSISTOR
Q908	BC847B	TRANSISTOR
Q951	BC857B	TRANSISTOR
Q952	BC847B	TRANSISTOR
Q953	BC847B	TRANSISTOR
Q954	BC857B	TRANSISTOR
Q955	2SA1535ARLB	TRANSISTOR
Q956	2SC3944ARLB	TRANSISTOR
Q1003	2SC3311ATA	TRANSISTOR
Q1107	BC847B	TRANSISTOR
Q1108	BC847B	TRANSISTOR
Q1109	BC847B	TRANSISTOR
Q1110	BC847B	TRANSISTOR
Q1111	BC847B	TRANSISTOR
Q1112	BC847B	TRANSISTOR
Q1113	BC847B	TRANSISTOR
Q1114	BC847B	TRANSISTOR
Q1115	BC847B	TRANSISTOR
Q1121	BC847B	TRANSISTOR
Q1122	BC847B	TRANSISTOR
Q1125	BC847B	TRANSISTOR
Q1301	BC847B	TRANSISTOR
Q1302	BC847B	TRANSISTOR
Q1303	BC847B	TRANSISTOR
Q1305	BC847B	TRANSISTOR
Q1306	BC857B	TRANSISTOR
Q1307	XN5601TX	TRANSISTOR
Q1308	BC857B	TRANSISTOR
Q1309	BC857B	TRANSISTOR
Q1311	BC857B	TRANSISTOR
Q1312	BC857B	TRANSISTOR
Q1313	BC857B	TRANSISTOR
Q1314	BC857B	TRANSISTOR
Q1315	BC857B	TRANSISTOR
Q1316	BC857B	TRANSISTOR
Q1318	BC857B	TRANSISTOR
Q1319	BC857B	TRANSISTOR
Q1320	BC857B	TRANSISTOR
Q1321	BC857B	TRANSISTOR
Q1322	BC857B	TRANSISTOR
Q1323	BC857B	TRANSISTOR
Q1324	BC857B	TRANSISTOR

Cct Ref	Parts Number	Description
Q1326	BC857B	TRANSISTOR
Q1327	2SK198RTX	TRANSISTOR
Q1328	BC847B	TRANSISTOR
Q1329	2SK198RTX	TRANSISTOR
Q1331	2SK198RTX	TRANSISTOR
Q1336	BC857B	TRANSISTOR
Q1340	BC847B	TRANSISTOR
Q1342	BC847B	TRANSISTOR
Q2002	BC857B	TRANSISTOR
Q2003	BC857B	TRANSISTOR
Q2004	BC857B	TRANSISTOR
Q2005	BC857B	TRANSISTOR
Q2006	BC847B	TRANSISTOR
Q2007	BC847B	TRANSISTOR
Q2008	BC847B	TRANSISTOR
Q2040	BC847B	TRANSISTOR
Q2041	BC847B	TRANSISTOR
Q2042	BC847B	TRANSISTOR
Q2043	BC847B	TRANSISTOR
Q2213	BC847B	TRANSISTOR
Q2214	BC847B	TRANSISTOR
Q2215	BC847B	TRANSISTOR
Q2216	BC847B	TRANSISTOR
Q2301	BC847B	TRANSISTOR
Q2302	BC847B	TRANSISTOR
Q2303	BC847B	TRANSISTOR
Q2308	BC857B	TRANSISTOR
Q2309	BC847B	TRANSISTOR
Q2311	BC847B	TRANSISTOR
Q3001	BC847B	TRANSISTOR
Q3002	BC847B	TRANSISTOR
Q3006	BC857B	TRANSISTOR
Q3007	BC847B	TRANSISTOR
Q3011	BC847B	TRANSISTOR
Q3071	BC847B	TRANSISTOR
Q3072	BC847B	TRANSISTOR
Q3130	BC847B	TRANSISTOR
Q3131	BC857B	TRANSISTOR
Q3132	BC847B	TRANSISTOR
Q3401	BC857B	TRANSISTOR
Q3807	BC847B	TRANSISTOR
Q3808	BC847B	TRANSISTOR
TRANSFORMERS		
L810	ETQR45T001A	TRANSFORMER
T501	ETH19Y187AY	TRANSFORMER
T801	ETS39AG296AC	TRANSFORMER
T841	ETS19AB1G6AG	TRANSFORMER
COILS		
J2	EXCELD35V	COIL
L002	ELESN2R2KA	COIL
L003	ELESN2R2KA	COIL
L004	EXCELD35V	COIL
L008	EXCELD35V	COIL
L009	EXCELD35V	COIL
L053	EXCELD35V	COIL
L055	ELESN2R2KA	COIL
L056	ELESN2R2KA	COIL
L351	EXCELSA24T	COIL
L381	ELESN6R8JA	COIL
L382	ELESN4R7KA	COIL
L383	ELESN4R7KA	COIL
L387	EXCELD35V	COIL
L559	EXCELD35C	COIL
L560	EXCELD35V	COIL
L561	EXCELD35C	COIL
L563	EXCELSA39V	COIL



Cct Ref	Parts Number	Description
L568	EXCELD35C	COIL
L571	EXCELD35C	COIL
L574	ELH5L7701	LINEARITY COIL
L576	ELC18B221F	COIL
L579	ELHKL025B	COIL
L701	TALFP15B152K	COIL
L702	ELC18B181E	COIL
L703	EXCELSA35T	COIL
L704	EXCELD35V	COIL
L812	EXCELSA39V	COIL
L815	EXCELSA39V	COIL
L818	EXCELSA39V	COIL
L860	TALL08T100KA	COIL
L862	TALL08T680KA	COIL
L874	EXCELSA35T	COIL
L877	EXCELSA35T	COIL
L883	TALL08T181KA	COIL
L895	EXCELSA35T	COIL
L904	TLT560K991R	COIL
L953	EXCELSA35T	COIL
L954	EXCELSA35T	COIL
L956	EXCELSA35T	COIL
L1103	TALC325T4R7M	COIL
L1104	TALC325T4R7M	COIL
L1106	ELESN4R7KA	COIL
L1107	TALC325T4R7M	COIL
L1108	TALC325T4R7M	COIL
L1109	TALC325T4R7M	COIL
L1110	TALC325T4R7M	COIL
L1111	ELESN4R7KA	COIL
L1112	EXCELD35V	COIL
L1115	TALC325T3R3M	COIL
L1116	TALC325T4R7M	COIL
L1300	TALC325T4R7M	COIL
L1303	TALC168T2R2K	COIL
L1304	TALC325T4R7M	COIL
L1305	TALC168T3R3K	COIL
L1306	TALC325T4R7M	COIL
L1308	TALC325T100K	COIL
L1309	TALC325T4R7M	COIL
L1310	TALC325T4R7M	COIL
L1311	TALC325T4R7M	COIL
L1312	EXCELD35V	COIL
L1313	TALC325T4R7M	COIL
L1314	TALC325T4R7M	COIL
L1315	TALC325T4R7M	COIL
L1316	TALC325T4R7M	COIL
L1317	TALC168T6R8K	COIL
L1318	TALC325T4R7M	COIL
L1319	TALC325T4R7M	COIL
L1320	TALC325T100K	COIL
L1321	TALC325T4R7M	COIL
L1322	EXCELD35V	COIL
L1323	TALC325T4R7M	COIL
L1324	TALC325T4R7M	COIL
L1328	TALC325T4R7M	COIL
L1330	TALC325T4R7M	COIL
L2001	EXCELD35V	COIL
L2002	EXCELD35V	COIL
L2004	TLT068K991R	COIL
L2005	EXCELD35V	COIL
L2007	EXCELD35V	COIL
L2008	EXCELD35V	COIL
L2009	TALC325T4R7M	COIL
L2010	TALC325T4R7M	COIL
L2278	EXCELSA35T	COIL

Cct Ref	Parts Number	Description
L2301	TALL08T100KA	COIL
L2302	TALL08T100KA	COIL
L2303	TAL10RP390LB	COIL
L2305	TAL10RP390LB	COIL
L2311	ELESN101KA	COIL
L2314	EXCELD35V	COIL
L2316	EXCELD35V	COIL
L2321	EXCELD35V	COIL
L2322	EXCELD35V	COIL
L2323	EXCELD35V	COIL
L2324	EXCELD35V	COIL
L2325	EXCELD35V	COIL
L2523	ELEBR6R8KA	COIL
L2524	ELEBR6R8KA	COIL
L2527	EXCELSA35T	COIL
L2703	EXCELD35V	COIL
L2704	TALL08T330KA	COIL
L2705	EXCELD35V	COIL
L2706	TAL10RP101LB	COIL
L2707	EXCELD35V	COIL
L2708	EXCELD35V	COIL
L2709	TLPF095	COIL
L2710	EXCELD35V	COIL
L2712	TAL10RP101LB	COIL
L2713	EXCELD35V	COIL
L2714	EXCELD35V	COIL
L2715	EXCELD35V	COIL
L2716	TALL08T330KA	COIL
L2717	TALL08T330KA	COIL
L2718	TLPF095	COIL
L2719	TLPF095	COIL
L2722	EXCELD35V	COIL
L2724	EXCELD35V	COIL
L2725	EXCELD35V	COIL
L2727	EXCELD35V	COIL
L2729	EXCELD35V	COIL
L2730	EXCELD35V	COIL
L2732	EXCELD35V	COIL
L2734	EXCELD35V	COIL
L2735	EXCELD35V	COIL
L3004	ELESN4R7KA	COIL
L3050	ELESN221KA	COIL
L3401	EXCELSA35T	COIL
L3402	EXCELSA35T	COIL
L3403	EXCELD35V	COIL
L3404	EXCELD35V	COIL
L3405	EXCELD35V	COIL
L3406	EXCELD35V	COIL
L3407	EXCELD35V	COIL
L3408	EXCELD35V	COIL
L3409	EXCELD35V	COIL
L3410	EXCELD35V	COIL
L3411	EXCELD35V	COIL
L3412	EXCELD35V	COIL
L3413	EXCELD35V	COIL
L3414	EXCELD35V	COIL
L3415	EXCELD35V	COIL
L3420	ELESN4R7KA	COIL
L3424	EXCELD25V	COIL
L4801	EXCELD35V	COIL
L4802	EXCELD35V	COIL
L4803	EXCELD35V	COIL
L4804	EXCELD35V	COIL
LC1101	TLK212T256AL	COIL
LC1102	TLK212T256AL	COIL
LC1104	TLK212T256AL	COIL

Cct Ref	Parts Number	Description
LC1105	TLK212T256AL	COIL
LC1106	TLK212T256AL	COIL
LC1110	TLK212T256AL	COIL
LC1111	TLK212T256AL	COIL
LC1112	TLK212T256AL	COIL
LC1113	TLK212T256AL	COIL
LC1114	TLK20LFA224M	COIL
LC1115	TLK20LFA103M	COIL
LC1116	TLK20LFA103M	COIL
LC1117	TLK20LFA103M	COIL
LC1118	TLK20LFA103M	COIL
LC1119	TLK20LFA103M	COIL
LC1120	TLK20LFA103M	COIL
LC1121	TLK20LFA224M	COIL
LC1122	TLK20LFA224M	COIL
LC1123	TLK20LFA224M	COIL
LC1124	TLK20LFA224M	COIL
LC1125	TLK20LFA103M	COIL
LC1126	TLK20LFA103M	COIL
LC1127	TLK20LFA103M	COIL
LC1128	TLK20LFA103M	COIL
LC1130	TLK20LFA103M	COIL
LC1131	TLK20LFA103M	COIL
LC1132	TLK20LFA103M	COIL
LC1133	TLK20LFA103M	COIL
LC1134	TLK20LFA103M	COIL
LC1135	TLK212T256AL	COIL
LC1136	TLK20LFA103M	COIL
LC1137	TLK20LFA103M	COIL
LC1138	TLK20LFA103M	COIL
LC1139	TLK20LFA103M	COIL
LC1140	TLK212T256AL	COIL
LC1141	TLK20LFA103M	COIL
LC1142	TLK20LFA103M	COIL
LC1143	TLK20LFA103M	COIL
LC1144	TLK212T256AL	COIL
LC1145	TLK212T256AL	COIL
LC1146	TLK212T256AL	COIL
FILTERS		
L893	ELF24V032B	FILTER
L894	ELF24V034A	FILTER
LC1107	ELKE103FA	FILTER
LC1108	ELKE103FA	FILTER
LC1109	ELKE103FA	FILTER
LC1147	ELKE103FA	FILTER
LC1329	ELKE103FA	FILTER
LC1330	ELKE103FA	FILTER
LC1331	ELKE103FA	FILTER
LC1332	ELKE103FA	FILTER
LC1333	ELKE103FA	FILTER
LC1343	QJT1090	EMI FILTER
LC1344	QJT1090	EMI FILTER
X101	EFCT6504BF	FILTER
X102	EFCT7004BF	CERAMIC FILTER
CRYSTALS		
X1301	TSSA171	CRYSTAL
X1302	TSSA171	CRYSTAL
X2101	TSSA128	CRYSTAL
X3501	H0J600400006	CRYSTAL
RESISTORS		
C025	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C572	ERD25TC0T	CARBON 0.25W 5% 0 Ω
D842	ERZV10D621CS	VARISTOR 10W 20% 620 Ω
JA1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω

Cct Ref	Parts Number	Description
JA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA4	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA11	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA16	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA17	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA23	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA24	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA25	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA32	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA37	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA38	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA39	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA40	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA41	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA43	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA5	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100 Ω
JSA6	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100 Ω
JSA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA45	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA46	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA47	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA48	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA52	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA53	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA55	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA57	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA59	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω

Cct Ref	Parts Number	Description			
R064	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R351	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R352	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω
R353	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω
R354	ERG3FJS823	METAL	3W	5%	82K Ω
R355	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R356	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R357	ERC12GK471C	SOLID	0.5W	5%	470 Ω
R360	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R361	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω
R362	ERG3FJS823	METAL	3W	5%	82K Ω
R363	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω
R364	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R365	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R366	ERC12GK561	SOLID	0.5W	10%	560 Ω
R370	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R371	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω
R372	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω
R373	ERG3FJ823	METAL	3W	5%	82K Ω
R374	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R375	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R376	ERC12GK561	SOLID	0.5W	10%	560 Ω
R382	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R385	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
R387	ERDS1TJ471	CARBON	0.5W	5%	470 Ω
R451	ERDS1TJ2R7	CARBON	0.5W	5%	2R7 Ω
R452	ERDS1TJ3R3	CARBON	0.5W	5%	3R3 Ω
R453	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R454	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R455	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R456	ERG3FJ221	METAL	3W	5%	220 Ω
R457	ERJ6ENF7151	S.M.CARB	0.1W	1%	7K15 Ω
R458	ERJ6ENF3481	S.M.CARB	0.1W	1%	3K48 Ω
R459	ERJ6ENF9531	S.M.CARB	0.1W	1%	9K53 Ω
R460	ERJ6ENF3011	S.M.CARB	0.1W	1%	300 Ω
R461	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω
R462	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R463	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω
R464	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R465	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R467	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R468	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R469	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R470	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R471	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R472	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R475	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R507	ERDS2TJ104T	CARBON	2W	5%	100K Ω
R508	ERD25TJ271	CARBON	0.25W	5%	270 Ω
R509	ERX3FJ6R8H	METAL	3W	5%	6.8 Ω
R510	ERG1FJS561	METAL	1W	5%	560 Ω
R511	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R512	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R513	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R514	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R551	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R552	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R555	ERD25TJ473	CARBON	0.25W	5%	47K Ω
R556	ERF2AKR22	WOUND	0.5W	5%	R22 Ω
R557	ERO50PKF2802	METAL	0.5W	1%	8K Ω
R558	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R559	ERD25TJ273	CARBON	0.25W	5%	27K Ω
R560	ERD25TJ393	CARBON	0.25W	5%	39K Ω
R564	ERO25CKF1002	METAL	0.25W	1%	10K Ω
R566	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω
R569	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω

Cct Ref	Parts Number	Description			
R570	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω
R572	ERD25TJ153	CARBON	0.25W	5%	15K Ω
R577	ERG3FJ331	METAL	3W	5%	330 Ω
R578	ERG3FJ331	METAL	3W	5%	330 Ω
R580	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R581	ERDS2TJ683T	CARBON	2W	5%	68K Ω
R582	ERD25TJ274	CARBON	0.25W	5%	270K Ω
R583	ERDS2TJ562	CARBON	2W	5%	5.6K Ω
R584	ERD25TJ272F	CARBON	0.25W	5%	2K7 Ω
R586	ERQ1CJP3R9	METAL	1W	5%	3R9 Ω
R591	EROS2TKF8871	METAL	2W	1%	8.87K Ω
R592	ERO25TKF1132	METAL	0.25W	1%	1K13 Ω
R593	ERQ14AJW100	FUSIBLE	0.25W	5%	10 Ω
R594	ERD25TJ334	CARBON	0.25W	5%	330K Ω
R647	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68 Ω
R652	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R653	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R654	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R655	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R656	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R657	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R658	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R705	ERF5ZJ471	WOUND	5W	5%	470 Ω
R714	ERDS1FJ680	CARBON	0.5W	5%	68 Ω
R719	ERF5AK4R7	WOUND	5W	1%	4R7 Ω
R779	ERJ6ENF1152	S.M.CARB	0.1W	1%	1K5 Ω
R780	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R781	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R782	ERDS2TJ391T	CARBON	2W	5%	390 Ω
R783	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R801	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω
R803	ERG3FJS183	METAL	3W	5%	18K Ω
R804	ERG3FJS183	METAL	3W	5%	18K Ω
R806	ERX12SZJR12	METAL	0.5W	5%	R12 Ω
R807	ERC14GK824C	SOLID	0.25W	10%	820K Ω
R810	ERX12SZJR12	METAL	0.5W	5%	R12 Ω
R815	ERDS1TJ151	CARBON	0.5W	5%	150 Ω
R819	ERD25TJ681	CARBON	0.25W	5%	680 Ω
R820	ERDS2TJ562	CARBON	2W	5%	5.6K Ω
R836	ERDS2TJ152T	CARBON	0.5W	5%	1K5 Ω
R837	ERDS2TJ152T	CARBON	0.5W	5%	1K5 Ω
R839	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω
R841	ERF2AJ560	WOUND	2W	5%	56 Ω
R842	ERG1FJS104	METAL	1W	5%	100K Ω
R843	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R851	ERDS1TJ153	CARBON	0.5W	5%	15K Ω
R853	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R854	ERDS1TJ333	CARBON	0.5W	5%	33K Ω
R855	ERDS2TJ821T	CARBON	2W	5%	820 Ω
R856	ERDS2TJ562	CARBON	2W	5%	5.6K Ω
R857	ERF7ZK2R2	WOUND	7W	10%	2R2 Ω
R859	ERDS2TJ333T	CARBON	2W	5%	33K Ω
R860	ERDS1TJ182	CARBON	0.5W	10%	1K8 Ω
R861	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω
R862	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω
R863	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R867	ERG3FJS153	METAL	3W	5%	15K Ω
R871	ERDS2TJ332T	CARBON	2W	5%	3K2 Ω
R872	ERDS2TJ154	CARBON	2W	5%	150K Ω
R875	ERG3FJ220H	METAL	3W	5%	22 Ω
R876	ERQ2CJP2R7	METAL	2W	2%	2R7 Ω
R877	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R878	ERDS2TJ221T	CARBON	0.5W	5%	220 Ω
R879	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R880	ERX5FJ1R0	METAL	5W	5%	1 Ω
R881	ERDS1TJ122	CARBON	0.5W	5%	1K2 Ω

Cct Ref	Parts Number	Description			
R883	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R884	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R885	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R888	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R891	ERC12ZGK105D	SOLID	0.5W	10%	1M Ω
R901	ERDS1FJ102	CARBON	0.5W	5%	1K Ω
R902	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R903	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R904	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R905	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R906	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R907	ERJ6GEYJ510	S.M.CARB	0.1W	5%	51 Ω
R908	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R909	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R950	ERQ1CJP331	FUSIBLE	1W	5%	330 Ω Δ
R952	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R953	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R954	ERDS1FYJ561P	CARBON	0.5W	5%	560 Ω
R955	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R956	ERDS1FYJ561P	CARBON	0.5W	5%	560 Ω
R957	ERDS1TJ330	CARBON	0.5W	5%	33 Ω
R958	ERDS1TJ330	CARBON	0.5W	5%	33 Ω
R960	ERQ14AJ100	FUSIBLE	0.25W	5%	10 Ω Δ
R962	ERQ14AJ120	METAL	0.25W	5%	12 Ω Δ
R963	ERQ14AJ120	METAL	0.25W	5%	12 Ω Δ
R964	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R965	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R966	ERG3FJS151	METAL	3W	5%	150 Ω
R967	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R968	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R969	ERDS1FJ390	CARBON	0.5W	5%	39 Ω Δ
R970	ERJ6GEYJ2R7	S.M.CARB	0.1W	5%	2R7 Ω
R971	ERJ6GEYJ2R7	S.M.CARB	0.1W	5%	2R7 Ω
R972	ERDS1FJ390	CARBON	0.5W	5%	39 Ω Δ
R973	ERDS1FJ121	CARBON	0.5W	5%	120 Ω Δ
R1042	ERD25TC0T	CARBON	0.25W	5%	0 Ω
R1043	ERD25TJ682	CARBON	0.25W	5%	6K8 Ω
R1044	ERD25TJ123	CARBON	0.25W	5%	12K Ω
R1045	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R1046	ERDS2TJ683T	CARBON	2W	5%	68K Ω
R1050	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1051	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1052	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1081	ERDS2TJ332T	CARBON	2W	5%	3K2 Ω
R1082	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R1083	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R1084	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R1101	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1102	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1103	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R1104	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1105	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R1106	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1107	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R1108	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R1109	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R1110	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R1111	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1112	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1113	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1114	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1115	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1116	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω
R1117	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1118	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1119	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω

Cct Ref	Parts Number	Description			
R1120	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1121	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1122	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1123	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1124	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1125	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1126	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1127	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1128	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1129	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1131	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1132	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1134	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1135	ERJ3GEYJ224V	S.M.CARB	0.16W	5%	220 Ω
R1136	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1137	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R1138	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1139	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R1140	ERJ6GEYJ225	S.M.CARB	0.1W	5%	2M2 Ω
R1141	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1142	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1144	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1145	ERJ3GEYJ391	S.M.CARB	0.125	5%	390 Ω
R1146	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1147	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1148	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1149	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1150	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1153	ERJ3GEYJ563V	S.M.CARB	0.125	5%	56K Ω
R1154	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1155	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1156	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1157	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1158	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1160	ERJ3GEYJ182V	S.M.CARB	0.1W	5%	1.8K Ω
R1161	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1162	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R1163	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R1164	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R1166	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R1168	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1169	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1170	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1172	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1178	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1179	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R1180	ERJ3GEYJ392V	S.M.CARB	0.125	5%	3.9K Ω
R1188	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1189	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1190	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1191	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1192	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1193	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1194	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R1195	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1196	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1202	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1205	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1209	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1214	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1217	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1221	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1225	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1232	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1233	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ
R1236	EXB38V680JV	CHIP	0.063	5%	680 Ω Δ

Cct Ref	Parts Number	Description			
R1239	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R1240	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R1241	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R1242	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1243	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R1249	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1250	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1251	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1253	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1255	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1256	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1257	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1258	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1264	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1293	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω
R1294	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω
R1301	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1303	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1304	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R1305	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1306	ERJ6ENF1200	S.M.CARB	0.1W	1%	20 Ω
R1307	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1308	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1309	ERJ6ENF3300	S.M.CARB	0.1W	1%	330 Ω
R1310	ERJ6ENF3300	S.M.CARB	0.1W	1%	330 Ω
R1311	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1312	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1313	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1314	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1315	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1316	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1317	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1318	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1319	ERJ6ENF9530V	S.M.CARB	0.1W	1%	9K53 Ω
R1320	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1321	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R1322	ERJ3GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1323	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1324	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R1326	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1327	ERJ6ENF1500	S.M.CARB	0.1W	1%	15 Ω
R1329	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1332	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R1335	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R1338	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1339	ERJ3GEYJ121	S.M.CARB	0.1W	5%	120 Ω
R1340	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1341	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1343	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1344	ERJ6ENF1500	S.M.CARB	0.1W	1%	15 Ω
R1345	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1348	ERJ6ENF1910	S.M.CARB	0.1W	1%	191 Ω
R1349	ERJ6ENF2701	S.M.CARB	0.1W	1%	27 Ω
R1350	ERJ6ENF2200	S.M.CARB	0.1W	1%	22 Ω
R1351	ERJ6ENF2701	S.M.CARB	0.1W	1%	27 Ω
R1352	ERJ6ENF2200	S.M.CARB	0.1W	1%	22 Ω
R1353	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1354	ERJ3GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1355	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1356	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω
R1357	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1358	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1359	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1360	ERJ6ENF5601	S.M.CARB	0.1W	1%	5K6 Ω
R1361	ERJ3GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1362	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω

Cct Ref	Parts Number	Description			
R1363	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1364	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1365	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1366	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1367	ERJ6ENF3000	S.M.CARB	0.1W	1%	30 Ω
R1368	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1369	ERJ3GEYJ823V	S.M.CARB	0.125	5%	82K Ω
R1370	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1371	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1372	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1373	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1374	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1375	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1376	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1377	ERJ3GEYJ334	S.M.CARB	0.125	5%	330K Ω
R1379	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1380	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1381	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1382	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1383	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1384	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1385	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R1387	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1388	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1389	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1390	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1391	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1392	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1393	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1394	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω
R1395	ERJ6ENF6200	S.M.CARB	0.1W	1%	6.2K Ω
R1396	ERJ6ENF3301	S.M.CARB	0.1W	1%	330 Ω
R1402	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1403	ERJ3GEYJ181	S.M.CARB	0.125	5%	180 Ω
R1406	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1407	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1408	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R1409	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1411	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R1412	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1413	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1414	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1415	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1416	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R1417	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1418	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1419	ERJ6ENF2000	S.M.CARB	0.1W	1%	20 Ω
R1420	ERJ6ENF2001	S.M.CARB	0.1W	1%	2K Ω
R1421	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R1423	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R1425	ERJ6ENF2001	S.M.CARB	0.1W	1%	2K Ω
R1426	ERJ6ENF2001	S.M.CARB	0.1W	1%	2K Ω
R1427	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1428	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1429	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1430	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R1431	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1432	ERJ6ENF56R0	S.M.CARB	0.1W	1%	56 Ω
R1433	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1434	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1435	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1436	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1437	ERJ6ENF1500	S.M.CARB	0.1W	1%	15 Ω
R1438	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R1439	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1440	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω

Cct Ref	Parts Number	Description			
R1441	ERJ6ENF1501	S.M.CARB	0.1W	1%	1R5K Ω
R1442	ERJ6ENF1501	S.M.CARB	0.1W	1%	1R5K Ω
R1443	ERJ6ENF47R0	S.M.CARB	0.1W	1%	47 Ω
R1444	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1445	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1446	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1447	ERJ6ENF1500	S.M.CARB	0.1W	1%	15 Ω
R1448	ERJ6ENF1500	S.M.CARB	0.1W	1%	15 Ω
R1451	ERJ6ENF5490	S.M.CARB	0.1W	1%	549 Ω
R1452	ERJ6ENF4750	S.M.CARB	0.1W	5%	75 Ω
R1453	ERJ3GEYJ180	S.M.CARB	0.125	5%	18 Ω
R1454	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1455	ERJ3GEYJ391	S.M.CARB	0.125	5%	390 Ω
R1457	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R1458	ERJ6ENF6201V	S.M.CARB	0.1W	1%	6K2 Ω
R1459	ERJ6ENF4751	S.M.CARB	0.1W	1%	4K75 Ω
R1460	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1461	ERJ6ENF3161	S.M.CARB	0.1W	1%	3K16 Ω
R1465	ERJ3GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1466	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1467	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω
R1468	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1471	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1473	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R1474	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω
R1475	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R1476	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1477	ERJ3GEYJ823V	S.M.CARB	0.125	5%	82K Ω
R1478	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1480	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1481	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1482	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1485	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1492	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1529	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω
R1531	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω
R1543	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω
R1544	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1545	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1546	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1547	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1548	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1549	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1550	ERJ3GEYJ821V	S.M.CARB	0.125	5%	820 Ω
R2004	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2006	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2007	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2008	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2009	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2010	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2011	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R2012	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2013	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2015	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2016	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R2017	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2018	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2019	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2025	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R2026	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R2030	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2031	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2033	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2034	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2035	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2036	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω

Cct Ref	Parts Number	Description			
R2039	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2040	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2041	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2042	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2043	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2044	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2050	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2051	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2052	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2251	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2252	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2253	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2254	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2255	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2256	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2257	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2258	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2301	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2303	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2304	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2305	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2306	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω
R2307	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω
R2308	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R2309	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R2310	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2311	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R2312	ERJ6GEYJ134	S.M.CARB	0.1W	5%	130K Ω
R2315	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2316	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R2317	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2318	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2319	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R2321	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2322	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2323	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω
R2324	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2325	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2326	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2327	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2328	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R2329	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R2330	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R2331	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2332	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2334	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω
R2335	ERJ6ENF6802V	S.M.CARB	0.1W	1%	68K Ω
R2336	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2337	ERJ6ENF1202	S.M.CARB	0.1W	1%	1K2 Ω
R2338	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2339	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2340	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2341	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2342	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2345	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R2346	ERJ6GEYJ303	S.M.CARB	0.1W	5%	30K Ω
R2348	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2349	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2350	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2351	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2352	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2354	ERX5FJ1R0	METAL	5W	5%	1 Ω
R2355	ERX3FJ2R2	METAL	3W	5%	2R2 Ω
R2356	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω
R2357	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2358	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω

Cct Ref	Parts Number	Description			
R2364	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω
R2366	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R2368	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2369	ERX3FJS4R7	METAL	3W	5%	4R7 Ω
R2371	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2374	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2375	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2377	ERG3FJ561H	METAL	2W	5%	560 Ω
R2378	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2383	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R2384	ERG3FJ471	METAL	3W	5%	470 Ω
R2386	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2387	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2388	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R2389	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω
R2390	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2391	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2393	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω
R2395	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R2396	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2400	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2401	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2410	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2411	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2412	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2421	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2423	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2428	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2430	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2472	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2473	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2479	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2480	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2483	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2484	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2485	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2486	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2498	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2499	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2717	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2724	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2725	ERJ6ENF1301	S.M.CARB	0.1W	1%	1K3 Ω
R2726	ERJ6ENF4121	S.M.CARB	0.1W	1%	4K12 Ω
R2727	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15 Ω
R2728	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2 Ω
R2731	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15 Ω
R2732	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2 Ω
R3001	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3002	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3003	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3004	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3005	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3006	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3007	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3008	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3009	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R3010	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3012	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3013	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3014	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3015	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
R3017	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3018	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3019	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3020	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3021	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω

Cct Ref	Parts Number	Description			
R3022	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3023	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3025	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3026	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3027	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3028	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3029	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3030	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3031	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R3034	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3035	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3036	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3037	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3044	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3049	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω
R3050	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω
R3051	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3053	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3054	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3059	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3062	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3064	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3066	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3069	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3071	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3073	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3074	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3076	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3077	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3078	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3079	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3084	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3085	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3086	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3087	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3088	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3089	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3090	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3116	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R3122	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R3123	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R3124	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R3125	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3126	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120 Ω
R3127	ERJ6GEYJ390	S.M.CARB	0.1W	5%	39 Ω
R3128	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3129	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3130	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3326	ERJ6ENF2202	S.M.CARB	0.1W	1%	22K Ω
R3401	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3402	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R3403	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3404	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R3405	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3406	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3407	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3408	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3409	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3410	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3411	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3412	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R3413	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3414	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3415	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3416	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3417	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω

Cct Ref	Parts Number	Description				
R3418	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3419	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R3420	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R3421	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	
R3422	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	
R3423	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3424	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3425	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3426	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R3427	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3428	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3429	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3430	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R3431	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3432	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R3433	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R3434	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	
R3435	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	
R3436	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3437	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R3438	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R3439	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R3440	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	
R3441	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R3442	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R3443	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R3455	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R3456	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R3457	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R3458	ERJ8GEYJ331	S.M.CARB	.125W	5%	330 Ω	
R3832	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R3835	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R3836	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R3841	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R4801	ERJ6ENF2701	S.M.CARB	0.1W	1%	27 Ω	
R4802	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω	
R4803	ERJ6ENF3320	S.M.CARB	0.1W	1%	3K3 Ω	
R4804	ERJ6ENF1001	S.M.CARB	0.1W	1%	1K Ω	
R4805	ERJ6ENF2213	S.M.CARB	0.1W	1%	221K Ω	
R4806	ERJ6ENF6651	S.M.CARB	0.1W	1%	6K65 Ω	
R4807	ERJ6ENF9091	S.M.CARB	0.1W	1%	9K09 Ω	
R4808	ERJ6ENF3832	S.M.CARB	0.1W	1%	38K3 Ω	
R4809	ERJ6ENF5621	S.M.CARB	0.1W	1%	5K62 Ω	
R4810	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω	
R4811	ERX2SJS6R8H	METAL	2W	5%	6.8 Ω	
CAPACITORS						
C001	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C002	ECA1CM470GB	ELECT	16V		47μF	
C003	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C008	ECJ2VB1H103K	CERAMIC	50V		10nF	
C012	ECJ2VF1H104Z	CERAMIC	50V		100nF	
C013	ECA0JM102GB	ELECT	6.3V		1000μF	
C014	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C017	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C018	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C020	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C026	ECJ2VF1H103Z	CERAMIC	50V		10nF	
C051	ECEA1HN010UB	ELECT	50V		1μF	
C052	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C057	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C062	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C063	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C064	ECA1HM100GB	ELECT	50V		10μF	
C068	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C069	ECA1HM101GB	ELECT	50V		100μF	
C070	ECJ2VF1H104Z	CERAMIC	50V		100nF	

Cct Ref	Parts Number	Description				
C071	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C352	ECJ2VB1H103K	CERAMIC	50V		10nF	
C354	ECJ2VB1H223K	CERAMIC	50V		22nF	
C355	ECQM2104KZ	FILM	250V		100nF	
C356	ECJ2VC1H180J	CERAMIC	50V		18pF	
C357	ECKC2H122J	CERAMIC	500V		1.2μF	
C359	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C360	ECA1CM471GB	ELECT	16V		470μF	
C361	ECJ2VB1H103K	CERAMIC	50V		10nF	
C363	ECJ2VB1H223K	CERAMIC	50V		22nF	
C364	ECJ2VC1H270J	CERAMIC	50V		27pF	
C365	ECQM2104KZ	FILM	250V		100nF	
C366	ECKC2H122J	CERAMIC	500V		1.2μF	
C371	ECJ2VB1H103K	CERAMIC	50V		10nF	
C373	ECJ2VB1H103K	CERAMIC	50V		10nF	
C374	ECJ2VC1H070D	CERAMIC	50V		7pF	
C375	ECQM2104KZ	FILM	250V		100nF	
C376	ECKC2H122J	CERAMIC	500V		1.2μF	
C377	ECA2EM100B	ELECT	250V		10μF	
C380	ECEA1HU101	ELECT	50V		100μF	
C382	ECA1CM221GB	ELECT	16V		220μF	
C383	ECA1CM222GB	ELECT	16V		2200μF	
C388	ECJ2VB1H183K	CERAMIC	50V		18nF	
C390	ECA1HM100GB	ELECT	50V		10μF	
C391	ECKC3D332J	CERAMIC	2KV		3.3μF	
C451	ECA1VM470B	ELECT	35V		47μF	
C452	ECEA1HU471	ELECT	50V		470μF	
C455	ECEA1CN220	ELECT	16V		22μF	
C457	ECA1VHG102B	ELECT	35V		1pF	
C459	ECA1HM100GB	ELECT	50V		10μF	
C460	ECQB1224KFW	FILM	100V		220nF	
C462	ECQV1H104J	FILM	50V		100nF	
C463	ECJ2VF1H103Z	CERAMIC	50V		10nF	
C475	ECJ2VC1H220J	CERAMIC	50V		22pF	
C476	ECHS1H102FZ3	FILM	100V		100nF	
C482	ECA1CM102B	ELECT	16V		1000μF	
C490	ECJ2VF1H103Z	CERAMIC	50V		10nF	
C504	ECA1VM101GB	ELECT	35V		100μF	
C505	ECQV1H104J	FILM	50V		100nF	
C508	ECA1EM102GB	ELECT	25V		100μF	
C510	ECJ2VF1C104Z	CERAMIC	16V		100nF	
C554	ECKW3D471JBN	CERAMIC	2KV		470pF	
C555	ECQP1223JZW	FILM	100V		22nF	
C556	ECWH20102JVY	FILM	200V		1μF	
C558	ECWH20472JVB	FILM	200V		4.7nF	
C559	ECQF4123JZH	FILM	400V		12nF	⚠
C560	ECEA2CNR47SB	ELECT	160V		0.47μF	
C561	ECWH20472JVB	FILM	200V		4.7nF	
C562	ECQM4223KC	FILM	400V		220nF	
C565	ECQE2155JFB	FILM	250V		1.5μF	
C569	ECA2EM330B	ELECT	250V		33μF	
C571	ECKC1H472J	CERAMIC	50V		4.7nF	
C573	ECKC2H103J	CERAMIC	500V		10nF	⚠
C576	ECKC3A182J	CERAMIC	1KV		1800pF	⚠
C578	ECWF4684JBB	FILM	400V		680nF	
C579	ECWF2394JBB	FILM	250V		0.39μF	
C580	ECWF4304JBP	FILM	400V		300nF	
C583	ECQB1H223K	FILM	50V		22nF	
C584	ECKC3D681J	CERAMIC	2KV		680pF	⚠
C585	ECKC3D681J	CERAMIC	2KV		680pF	⚠
C591	ECA1HM100GB	ELECT	50V		10μF	
C705	ECQM2562JZB	FILM	200V		5.6μF	
C708	ECQE2334KF3	FILM	200V		330nF	
C709	ECQE1335KFB	FILM	100V		3.3μF	
C710	ECQE1335KFB	FILM	100V		3.3μF	
C711	ECQE1335KFB	FILM	100V		3.3μF	

Cct Ref	Parts Number	Description			
C715	ECKC3D271J	CERAMIC	2KV	270pF	
C801	ECKRAE472ZE	CERAMIC	10V	4.7μF	
C802	ECKRAE472ZE	CERAMIC	10V	4.7μF	
C803	ECKRAE472ZE	CERAMIC	10V	4.7μF	
C804	ECKRAE472ZE	CERAMIC	10V	4.7μF	
C808	ECA1VHG221B	ELECT	35V	220μF	
C817	ECKC3D681J	CERAMIC	2KV	680pF	⚠
C819	ECKC2H471J	CERAMIC	500V	470pF	⚠
C820	ECOS2GP471DB	ELECT	200V	470μF	
C823	ECQF4123JZH	FILM	400V	12nF	⚠
C824	ECQE6823KFB	FILM	600V	82nF	
C828	ECKC3D152J	CERAMIC	2KV	1.5nF	⚠
C829	ECQB1H681JF3	FILM	50V	680pF	
C831	ECKCNA471MBB	CERAMIC	10V	4R7μF	⚠
C841	ECKRAE472ZE	CERAMIC	10V	4.7μF	
C843	ECQV1H104J	FILM	50V	100nF	
C844	ECKC3D392J	CERAMIC	2KV	3900pF	⚠
C845	ECKC1H101J	CERAMIC	50V	100pF	
C847	ECA2WM100E	ELECT	450V	10μF	
C851	ECQB1104JF3	FILM	100V	100nF	
C852	ECQB1104JF3	FILM	100V	100nF	
C853	ECEA1HU102	ELECT	50V	1000μF	
C854	ECKC2H561J	CERAMIC	500V	560pF	⚠
C855	ECQB1H103J	FILM	50V	10nF	⚠
C858	ECKC3D182JB	CERAMIC	2KV	1.8nF	⚠
C861	ECA1EHG331B	ELECT	25V	330pF	
C862	ECA1EHG222B	ELECT	25V	2.2pF	
C864	ECA1EM222GB	ELECT	25V	2200μF	
C865	ECA1EM222GB	ELECT	25V	2200μF	
C866	ECOS2CA561BB	ELECT	160V	560μF	
C868	ECA160V33UB	ELECT	160V	33μF	
C869	ECA1EM472E	ELECT	50V	4.7pF	
C871	ECA1HHG100B	ELECT	50V	10μF	
C883	ECA1HM100GB	ELECT	50V	10μF	
C885	ECA1VM470B	ELECT	35V	47μF	
C888	ECA1CM471GB	ELECT	16V	470μF	
C889	ECA1CM222GB	ELECT	16V	2200μF	
C892	ECQU2A224MN	FILM	250V	220nF	⚠
C893	ECQU2A224MN	FILM	250V	220nF	⚠
C894	ECQU2A683MNB	FILM	100V	68nF	⚠
C895	ECKCNA152ME7	CERAMIC	10V	1.5μF	
C897	ECKCNA152ME7	CERAMIC	10V	1.5μF	
C901	EEANA1E100B	CERAMIC	25V	10μF	
C902	ECA1HM101GB	ELECT	50V	100μF	
C905	ECA1VM101GB	ELECT	35V	100μF	
C907	ECJ2VC1H151J	CERAMIC	50V	150pF	
C955	ECQB1103J	FILM	100V	10nF	
C958	ECA2CM100B	ELECT	160V	10μF	
C959	ECQB1103J	FILM	100V	10nF	
C960	ECJ2VC1H221J	CERAMIC	50V	220pF	
C961	ECA2CM100B	ELECT	160V	10μF	
C962	ECQM4472RJZ	FILM	400V	4.7μF	
C963	ECJ2VC1H221J	CERAMIC	50V	220pF	
C964	ECA1CHG101	ELECT	16V	100μF	
C966	ECA1HM101GB	ELECT	50V	100μF	
C967	ECA1CHG471B	ELECT	16V	470μF	
C974	ECA1VM101GB	ELECT	35V	100μF	
C1040	ECQB1H223K	FILM	50V	22nF	
C1041	ECA1HM470GB	ELECT	50V	47μF	
C1043	ECKC1H101J	CERAMIC	50V	100pF	
C1101	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1102	EEVHB0J101P	CERAMIC	10V	100pF	
C1103	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1104	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1105	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1106	ECJ2VF1C104Z	CERAMIC	16V	100nF	

Cct Ref	Parts Number	Description			
C1107	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1108	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1109	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1112	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1115	ECJ2VB1C104K	CERAMIC	16V	100nF	
C1116	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1117	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1118	ECJ2VB1H472K	CERAMIC	50V	4.7nF	
C1119	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1120	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1121	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1122	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1123	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1124	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1125	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1126	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1127	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1128	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1129	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1130	EEVHB0G221P	CERAMIC	16V	220pF	
C1131	ECJ2VC1H220J	CERAMIC	50V	22pF	
C1132	ECJ2VC1H220J	CERAMIC	50V	22pF	
C1133	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1134	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1135	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1136	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1137	EEVHB0G221P	CERAMIC	16V	220pF	
C1138	ECJ2VC1H221J	CERAMIC	50V	220pF	
C1139	ECJ2VC1H221J	CERAMIC	50V	220pF	
C1140	ECJ2VB1E104K	CERAMIC	25V	100nF	
C1142	ECJ2VC1H151J	CERAMIC	50V	150pF	
C1144	ECJ2VC1H101J	CERAMIC	50V	100pF	
C1146	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1147	ECA1CM471GB	ELECT	16V	470μF	
C1148	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1150	ECJ2VB1C104K	CERAMIC	16V	100nF	
C1151	ECJ2VB1C104K	CERAMIC	16V	100nF	
C1153	ECJ2VB1H103K	CERAMIC	50V	10nF	
C1154	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C1156	ECA1HM100GB	ELECT	50V	10μF	
C1157	TACCM0J335KT	CERAMIC	6.3V	3.3μF	
C1158	TACCM0J335KT	CERAMIC	6.3V	3.3μF	
C1159	EEVHB1C100R	CERAMIC	16V	10pF	
C1160	EEVHB1C100R	CERAMIC	16V	10pF	
C1161	EEVHB0G221P	CERAMIC	16V	220pF	
C1162	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1163	EEVHB0J101P	CERAMIC	10V	100pF	
C1164	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1165	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C1166	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1167	EEVHB1C101P	CERAMIC	16V	100pF	
C1168	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1170	ECEA1EKN100B	ELECT	50V	10μF	
C1251	ECA1HM101GB	ELECT	50V	100μF	
C1252	ECA1HM100GB	ELECT	50V	10μF	
C1253	ECJ2VB1C104K	CERAMIC	16V	100nF	
C1254	ECJ2VB1C104K	CERAMIC	16V	100nF	
C1255	ECA1CM470GB	ELECT	16V	47μF	
C1290	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1292	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1293	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1294	ECA1HM101GB	ELECT	50V	100μF	
C1295	ECJ2VF1C104Z	CERAMIC	16V	100nF	
C1296	ECA0JM471GB	ELECT	6.3V	470μF	
C1300	ECJ1VC1H120J	CERAMIC	50V	12pF	
C1302	ECJ2VF1C105Z	CERAMIC	16V	1pF	

Cct Ref	Parts Number	Description		
C1303	ECJ1VC1H120J	CERAMIC	50V	12pF
C1306	ECJ1VC1H680J	CERAMIC	50V	68pF
C1307	ECJ1VC1H180J	CERAMIC	50V	18pF
C1309	ECJ1VC1H181J	CERAMIC	50V	180pF
C1310	ECJ1VC1H220J	CERAMIC	50V	22pF
C1312	ECJ1VC1H181J	CERAMIC	50V	180pF
C1313	TACCN0J105KT	CERAMIC	6.3V	1μF
C1315	TACCN0J105KT	CERAMIC	6.3V	1μF
C1316	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1317	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1318	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1319	ECJ1VC1H470J	CERAMIC	50V	47pF
C1320	ECJ1VC1H060D	CERAMIC	50V	6pF
C1322	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1323	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1324	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1325	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1326	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1327	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1328	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1329	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1330	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1331	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1332	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1333	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1334	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1335	ECJ1VB1H103	CERAMIC	50V	10nF
C1336	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1337	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1338	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1339	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1340	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1341	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1342	ECJ1VF1H103Z	CERAMIC	50V	10nF
C1344	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1345	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1346	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1347	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1348	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1349	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1350	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1351	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1352	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1353	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1354	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1355	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1356	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1357	ECJ1VC1H330J	CERAMIC	50V	33pF
C1358	ECJ1VB1H472K	CERAMIC	50V	4.7nF
C1359	ECJ1VB1H472K	CERAMIC	50V	4.7nF
C1360	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1361	ECJ1VB1H103	CERAMIC	50V	10nF
C1362	EEVHB0J101P	CERAMIC	10V	100pF
C1363	ECJ1VC1H102J	CERAMIC	50V	1nF
C1364	ECJ1VC1H680J	CERAMIC	50V	68pF
C1365	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1367	TACCN0J105KT	CERAMIC	6.3V	1μF
C1370	ECJ1VB1H103	CERAMIC	50V	10nF
C1371	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1372	ECJ1VF1H103Z	CERAMIC	50V	10nF
C1373	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1374	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1376	ECJ1VC1H680J	CERAMIC	50V	68pF
C1377	ECJ1VB1H103	CERAMIC	50V	10nF
C1378	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1379	ECJ1VB1C104K	CERAMIC	16V	100nF

Cct Ref	Parts Number	Description		
C1380	TACCN0J105KT	CERAMIC	6.3V	1μF
C1381	ECJ1VC1H330J	CERAMIC	50V	33pF
C1382	ECJ1VB1C393K	CERAMIC	16V	39nF
C1383	TACCN0J105KT	CERAMIC	6.3V	1μF
C1384	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1385	ECJ2VF1H103Z	CERAMIC	50V	10nF
C1386	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1387	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1389	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1390	TACCN0J105KT	CERAMIC	6.3V	1μF
C1391	TACCN0J105KT	CERAMIC	6.3V	1μF
C1392	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1395	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1396	EEVHB0G221P	CERAMIC	16V	220pF
C1398	ECJ1VC1H120J	CERAMIC	50V	12pF
C1399	ECJ1VC1H120J	CERAMIC	50V	12pF
C1400	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1401	ECJ1VC1H101J	CERAMIC	50V	100pF
C1403	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1404	ECJ1VC1H151J	CERAMIC	50V	150pF
C1405	ECJ2VF1C104Z	CERAMIC	16V	100nF
C1406	TACCN0J105KT	CERAMIC	6.3V	1μF
C1407	ECJ1VC1H561J	CERAMIC	50V	560pF
C1408	ECJ1VC1H561J	CERAMIC	50V	560pF
C1409	TACCN0J105KT	CERAMIC	6.3V	1μF
C1410	ECJ1VC1H561J	CERAMIC	50V	560pF
C1411	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1412	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1413	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1414	ECJ1VC1H470J	CERAMIC	50V	47pF
C1415	ECJ1VC1H060D	CERAMIC	50V	6pF
C1417	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1418	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1419	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1420	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1421	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1422	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1423	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1424	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1425	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1426	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1427	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1428	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1429	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1430	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1431	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1432	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1433	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1434	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1435	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1436	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1437	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1438	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1439	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1440	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1441	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1442	ECJ1VB1H472K	CERAMIC	50V	4.7nF
C1443	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1444	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1445	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1446	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1447	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1448	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1449	ECJ1VF1H103Z	CERAMIC	50V	10nF
C1450	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1451	ECJ2VF1C105Z	CERAMIC	16V	1pF

Cct Ref	Parts Number	Description		
C1452	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1454	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1455	ECJ2VB1C104K	CERAMIC	16V	100nF
C1456	ECJ2VB1C104K	CERAMIC	16V	100nF
C1457	ECJ2VB1C104K	CERAMIC	16V	100nF
C1459	ECJ3VB1C474K	CERAMIC	16V	470nF
C1460	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1461	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1462	ECJ1VB1H332K	CERAMIC	50V	3.3nF
C1465	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1466	ECJ1VC1H680J	CERAMIC	50V	68pF
C1467	ECJ1VC1H330J	CERAMIC	50V	33pF
C1468	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1469	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1470	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1471	ECJ1VC1H330J	CERAMIC	50V	33pF
C1472	ECJ1VC1H680J	CERAMIC	50V	68pF
C1474	ECJ2VB1C104K	CERAMIC	16V	100nF
C1475	ECJ2VB1C104K	CERAMIC	16V	100nF
C1476	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1477	ECJ2VB1C104K	CERAMIC	16V	100nF
C1478	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1479	EEVHP1C100R	CERAMIC	16V	10pF
C1480	EEVHP1C100R	CERAMIC	16V	10pF
C1481	TACCN0J105KT	CERAMIC	6.3V	1μF
C1482	TACCN0J105KT	CERAMIC	6.3V	1μF
C1483	EEVHP1E4R7R	CERAMIC	25V	4R7pF
C1484	EEVHP1C100R	CERAMIC	16V	10pF
C1485	EEVHP1C100R	CERAMIC	16V	10pF
C1486	EEVHP1E4R7R	CERAMIC	25V	4R7pF
C1487	EEVHP1C100R	CERAMIC	16V	10pF
C1488	EEVHP1C100R	CERAMIC	16V	10pF
C1489	TACCN0J105KT	CERAMIC	6.3V	1μF
C1490	TACCM0J335KT	CERAMIC	6.3V	3.3μF
C1493	EEVHB0J101P	CERAMIC	10V	100pF
C1494	EEVHB0G221P	CERAMIC	16V	220pF
C1495	EEVHB0G221P	CERAMIC	16V	220pF
C1496	EEVHB0J101P	CERAMIC	10V	100pF
C1497	EEVHB0J101P	CERAMIC	10V	100pF
C1498	EEVHB0G221P	CERAMIC	16V	220pF
C1499	EEVHB0J101P	CERAMIC	10V	100pF
C1500	EEVHB1C101P	CERAMIC	16V	100pF
C1501	EEVHB1C470P	CERAMIC	16V	47pF
C1502	EEVHB0J101P	CERAMIC	10V	100pF
C1503	EEVHB0J101P	CERAMIC	10V	100pF
C1505	EEVHB0G221P	CERAMIC	16V	220pF
C1506	EEVHB0G221P	CERAMIC	16V	220pF
C1507	EEVHB0G221P	CERAMIC	16V	220pF
C1509	ECA1HM100GB	ELECT	50V	10μF
C1510	ECJ2VB1C104K	CERAMIC	16V	100nF
C1511	ECJ2VB1C104K	CERAMIC	16V	100nF
C1513	ECJ2VB1C104K	CERAMIC	16V	100nF
C1514	ECJ2VB1C104K	CERAMIC	16V	100nF
C1515	ECJ2VB1C104K	CERAMIC	16V	100nF
C1516	ECJ2VB1C104K	CERAMIC	16V	100nF
C1520	ECQV1H104J	FILM	50V	100nF
C1544	ECA1HM101GB	ELECT	50V	100μF
C1550	ECA1HM101GB	ELECT	50V	100μF
C1551	ECA1HM101GB	ELECT	50V	100μF
C1563	ECA1CM470GB	ELECT	16V	47μF
C1564	ECA1HM4R7GB	ELECT	50V	4.7μF
C1565	ECA1HM4R7GB	ELECT	50V	4.7μF
C1566	ECA1HM220GB	ELECT	50V	22μF
C1568	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1569	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1588	ECJ2VF1C105Z	CERAMIC	16V	1pF

Cct Ref	Parts Number	Description		
C1589	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1590	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1591	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1592	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1593	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1594	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1595	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1596	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1597	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1598	ECJ1VB1C104K	CERAMIC	16V	100nF
C1599	EEVHB0J101P	CERAMIC	10V	100pF
C2004	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2005	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2006	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2007	ECJ2VC1H560J	CERAMIC	50V	56pF
C2008	ECJ2VC1H470J	CERAMIC	50V	47pF
C2009	ECJ2VC1H470J	CERAMIC	50V	47pF
C2010	ECJ2VC1H560J	CERAMIC	50V	56pF
C2011	ECJ2VC1H070D	CERAMIC	50V	7pF
C2014	ECJ2VC1H010C	CERAMIC	50V	1pF
C2015	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2016	ECA1HM101GB	ELECT	50V	100μF
C2017	ECJ2VC1H010C	CERAMIC	50V	1pF
C2024	ECJ3VB1C474K	CERAMIC	16V	470nF
C2025	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2027	ECA1HM100GB	ELECT	50V	10μF
C2028	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2030	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2031	ECA1HM101GB	ELECT	50V	100μF
C2032	TACCN0J105KT	CERAMIC	6.3V	1μF
C2033	ECA1HM100GB	ELECT	50V	10μF
C2034	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2035	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2036	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2037	TACCN0J105KT	CERAMIC	6.3V	1μF
C2038	ECA1HM100GB	ELECT	50V	10μF
C2039	ECA1HM101GB	ELECT	50V	100μF
C2040	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2041	ECA1HM3R3GB	ELECT	50V	3.3μF
C2042	ECJ2VB1H102K	CERAMIC	50V	1nF
C2043	ECJ2VB1H102K	CERAMIC	50V	1nF
C2044	ECJ2VB1H102K	CERAMIC	50V	1nF
C2045	ECJ2VB1H102K	CERAMIC	50V	1nF
C2047	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2222	ECEA1HKA100	ELECT	50V	10pF
C2223	ECEA1HKA100	ELECT	50V	10pF
C2224	ECEA1HKA100	ELECT	50V	10pF
C2225	ECEA1HKA100	ELECT	50V	10pF
C2226	ECEA1HKA100	ELECT	50V	10pF
C2227	ECEA1HKA100	ELECT	50V	10pF
C2301	ECA1VHG222E	ELECT	35V	2.2pF
C2302	ECQV1H684J	FILM	50V	680nF
C2303	ECJ3VB1H104K	CERAMIC	50V	100nF
C2304	ECA1VM222GE	ELECT	35V	2200μF
C2305	ECJ2VB1H333K	CERAMIC	50V	33nF
C2306	ECJ2VB1H561K	CERAMIC	50V	560pF
C2307	ECJ2VB1H471K	CERAMIC	50V	470pF
C2308	ECJ2VC1H270J	CERAMIC	50V	27pF
C2309	ECJ2VB1H471K	CERAMIC	50V	470pF
C2310	ECJ2VB1H331K	CERAMIC	50V	330nF
C2311	ECEA1HN010	ELECT	50V	1μF
C2312	ECJ3VB1H104K	CERAMIC	50V	100nF
C2313	ECJ2VB1H223K	CERAMIC	50V	22nF
C2314	ECJ2VB1H331K	CERAMIC	50V	330nF
C2315	ECJ3VB1H104K	CERAMIC	50V	100nF
C2316	ECJ2VB1H471K	CERAMIC	50V	470pF

Cct Ref	Parts Number	Description		
C2317	ECA1HM4R7GB	ELECT	50V	4.7μF
C2318	ECEA1HN010	ELECT	50V	1μF
C2319	ECJ2VB1H102K	CERAMIC	50V	1nF
C2320	ECJ2VB1H681K	CERAMIC	50V	680pF
C2321	ECA1CM471GB	ELECT	16V	470μF
C2322	ECJ2VB1H471K	CERAMIC	50V	470pF
C2323	ECQV1H684J	FILM	50V	680nF
C2324	ECJ2VB1H223K	CERAMIC	50V	22nF
C2325	ECA1HM4R7GB	ELECT	50V	4.7μF
C2326	ECA1HM101GB	ELECT	50V	100μF
C2327	ECJ2VB1H102K	CERAMIC	50V	1nF
C2328	ECA1HM101GB	ELECT	50V	100μF
C2329	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2330	ECJ2VB1H561K	CERAMIC	50V	560pF
C2331	ECJ3VB1H104K	CERAMIC	50V	100nF
C2332	ECJ2VB1H104K	CERAMIC	50V	100nF
C2333	ECJ2VB1H333K	CERAMIC	50V	33nF
C2334	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2335	ECJ2VC1H101J	CERAMIC	50V	100pF
C2336	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2337	ECA1CM470GB	ELECT	16V	47μF
C2338	ECEA1HU221	ELECT	50V	220μF
C2339	ECEA1HU221	ELECT	50V	220μF
C2340	ECA1HM101GB	ELECT	50V	100μF
C2342	ECA1HM101GB	ELECT	50V	100μF
C2343	ECA1HM100GB	ELECT	50V	10μF
C2344	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C2345	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C2346	ECJ2VC1H101J	CERAMIC	50V	100pF
C2348	ECJ2VB1H681K	CERAMIC	50V	680pF
C2350	ECJ2VB1H471K	CERAMIC	50V	470pF
C2352	ECEA1HN2R2UB	ELECT	50V	2.2μF
C2353	ECJ2VB1E104K	CERAMIC	25V	100nF
C2359	ECJ2VB1E104K	CERAMIC	25V	100nF
C2360	ECJ2VB1E823K	CERAMIC	25V	82nF
C2361	ECJ2VB1H152K	ELECT	50V	1.5nF
C2362	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2366	EEANA1E1R0B	CERAMIC	25V	0R1μF
C2369	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2370	ECA1HM4R7GB	ELECT	50V	4.7μF
C2371	ECUY1C154KBX	S.M.CARB	16V	150nF
C2372	ECEA1HNR22	ELECT	50V	220nF
C2375	ECJ2VB1H102K	CERAMIC	50V	1nF
C2376	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2377	ECJ2VB1H102K	CERAMIC	50V	1nF
C2378	ECA0JM222GB	ELECT	6.3V	2.2nF
C2386	ECJ2VB1H681K	CERAMIC	50V	680pF
C2388	ECJ2VB1C104K	CERAMIC	16V	100nF
C2389	ECUY1C154KBX	S.M.CARB	16V	150nF
C2391	ECJ2VB1C104K	CERAMIC	16V	100nF
C2392	ECJ2VB1E823K	CERAMIC	25V	82nF
C2394	ECJ2VB1H152K	ELECT	50V	1.5nF
C2395	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2397	EEANA1E1R0B	CERAMIC	25V	0R1μF
C2398	ECA1CM102B	ELECT	16V	1000μF
C2399	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2424	ECEA1HNR22	ELECT	50V	220nF
C2590	ECA1CM471GB	ELECT	16V	470μF
C2608	ECEA1HKA100	ELECT	50V	10pF
C2609	ECEA1HKA100	ELECT	50V	10pF
C2610	ECA1CM471GB	ELECT	16V	470μF
C2702	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2703	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2704	ECA1CM471GB	ELECT	16V	470μF
C2707	ECA1CHG471B	ELECT	16V	470μF
C2708	EEUFC1A471B	CERAMIC	10V	470pF

Cct Ref	Parts Number	Description		
C2711	ECJ2VF1C104Z	CERAMIC	16V	100nF
C2713	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2715	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2716	EEUFC1A471B	CERAMIC	10V	470pF
C2719	ECA1CM471GB	ELECT	16V	470μF
C2720	ECA1CM471GB	ELECT	16V	470μF
C2722	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2723	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2726	ECA1EHG102B	ELECT	25V	1000μF
C2730	ECA1CM471GB	ELECT	16V	470μF
C2731	ECA1CM471GB	ELECT	16V	470μF
C2732	EEUFC1A471B	CERAMIC	10V	470pF
C2733	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2734	ECA1EM471GB	ELECT	25V	470μF
C2737	ECA1CM471GB	ELECT	16V	470μF
C2740	ECA1CM471GB	ELECT	16V	470μF
C2750	TACCN0J105KT	CERAMIC	6.3V	1μF
C2751	TACCN0J105KT	CERAMIC	6.3V	1μF
C3001	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3003	ECEA1CN470	ELECT	16V	47μF
C3006	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3007	ECJ2VB1E473K	CERAMIC	25V	47nF
C3008	ECJ2VB1E473K	CERAMIC	25V	47nF
C3009	ECJ2VB1E473K	CERAMIC	25V	47nF
C3010	ECJ2VB1E473K	CERAMIC	25V	47nF
C3011	ECJ2VB1E473K	CERAMIC	25V	47nF
C3012	ECJ2VB1E473K	CERAMIC	25V	47nF
C3018	ECJ2VB1C104K	CERAMIC	16V	100nF
C3020	TACCN0J105KT	CERAMIC	6.3V	1μF
C3021	ECJ2VB1C104K	CERAMIC	16V	100nF
C3026	TACCN0J105KT	CERAMIC	6.3V	1μF
C3027	TACCN0J105KT	CERAMIC	6.3V	1μF
C3028	TACCN0J105KT	CERAMIC	6.3V	1μF
C3029	TACCN0J105KT	CERAMIC	6.3V	1μF
C3032	TACCN0J105KT	CERAMIC	6.3V	1μF
C3033	TACCN0J105KT	CERAMIC	6.3V	1μF
C3034	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3035	ECA1HM101GB	ELECT	50V	100μF
C3043	TACCN0J105KT	CERAMIC	6.3V	1μF
C3044	TACCN0J105KT	CERAMIC	6.3V	1μF
C3045	TACCN0J105KT	CERAMIC	6.3V	1μF
C3046	ECA1HM101GB	ELECT	50V	100μF
C3047	TACCN0J105KT	CERAMIC	6.3V	1μF
C3048	TACCN0J105KT	CERAMIC	6.3V	1μF
C3049	TACCN0J105KT	CERAMIC	6.3V	1μF
C3050	ECA1CM221GB	ELECT	16V	220μF
C3051	TACCN0J105KT	CERAMIC	6.3V	1μF
C3053	ECA1HM100GB	ELECT	50V	10μF
C3054	ECA1HM100GB	ELECT	50V	10μF
C3055	ECEA1HN100UB	ELECT	50V	10μF
C3056	ECEA1HN100UB	ELECT	50V	10μF
C3057	TACCN0J105KT	CERAMIC	6.3V	1μF
C3058	TACCN0J105KT	CERAMIC	6.3V	1μF
C3065	TACCN0J105KT	CERAMIC	6.3V	1μF
C3066	TACCN0J105KT	CERAMIC	6.3V	1μF
C3068	TACCN0J105KT	CERAMIC	6.3V	1μF
C3071	ECJ2VC1H101J	CERAMIC	50V	100pF
C3072	ECJ2VC1H101J	CERAMIC	50V	100pF
C3073	ECJ2VC1H101J	CERAMIC	50V	100pF
C3077	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3078	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3079	ECEA1CN470	ELECT	16V	47μF
C3101	ECQB1H333J	FILM	50V	33nF
C3102	ECQB1H333J	FILM	50V	33nF
C3107	ECKC1H561J	CERAMIC	50V	560pF
C3109	ECKC1H561J	CERAMIC	50V	560pF

Cct Ref	Parts Number	Description		
C3111	ECKC1H103J	CERAMIC	50V	100µF
C3112	ECJ2VC1H680J	CERAMIC	50V	68pF
C3113	ECA1CM470GB	ELECT	16V	47µF
C3114	ECEA1CKA470	ELECT	16V	47µF
C3115	ECEA1CN470	ELECT	16V	47µF
C3301	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3302	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3303	ECJ2VF1C104Z	CERAMIC	16V	100nF
C3322	ECJ2VC1H471J	CERAMIC	50V	470pF
C3323	ECA1HHG100B	ELECT	50V	10µF
C3324	ECA1HHG100B	ELECT	50V	10µF
C3401	ECJ2VC1H561J	CERAMIC	50V	560pF
C3404	ECJ2VC1H561J	CERAMIC	50V	560pF
C3407	ECJ2VC1H561J	CERAMIC	50V	560pF
C3408	ECJ2VC1H561J	CERAMIC	50V	560pF
C3409	ECJ2VC1H561J	CERAMIC	50V	560pF
C3410	ECJ2VC1H561J	CERAMIC	50V	560pF
C3415	ECJ2VC1H102J	CERAMIC	50V	1nF
C3417	ECJ2VC1H561J	CERAMIC	50V	560pF
C3418	ECJ2VC1H561J	CERAMIC	50V	560pF
C3419	ECJ2VC1H561J	CERAMIC	50V	560pF
C3420	ECJ2VC1H561J	CERAMIC	50V	560pF
C3425	ECJ2VC1H102J	CERAMIC	50V	1nF
C3427	ECJ2VC1H561J	CERAMIC	50V	560pF
C3428	ECJ2VC1H561J	CERAMIC	50V	560pF
C3429	ECJ2VC1H561J	CERAMIC	50V	560pF
C3430	ECJ2VC1H561J	CERAMIC	50V	560pF
C3435	ECJ2VC1H102J	CERAMIC	50V	1nF
C3450	ECEA1AKA221B	ELECT	10V	220µF
C3451	ECEA1AKA221B	ELECT	10V	220µF
C3452	ECEA1CKA101	ELECT	16V	100µF
C3453	ECEA1CKA101	ELECT	16V	100µF
C3454	ECJ2VC1H220J	CERAMIC	50V	22pF
C3455	ECJ2VC1H220J	CERAMIC	50V	22pF
C3456	ECJ2VC1H220J	CERAMIC	50V	22pF
C3457	ECJ2VC1H221J	CERAMIC	50V	220pF
C3458	ECJ2VC1H221J	CERAMIC	50V	220pF
C3459	ECJ2VC1H221J	CERAMIC	50V	220pF
C4801	ECA1HM101GB	ELECT	50V	100µF
C4802	ECJ2VF1C104Z	CERAMIC	16V	100nF
C4803	ECQV1H334JL3	FILM	50V	330nF
C4804	ECQV1H334JL3	FILM	50V	330nF
C4805	ECJ2VF1C104Z	CERAMIC	16V	100nF
C4806	ECJ2VB1H103K	CERAMIC	50V	10nF
C4807	ECA1HM4R7GB	ELECT	50V	4.7µF
C4808	ECA1HM4R7GB	ELECT	50V	4.7µF
C4809	ECJ2VB1H103K	CERAMIC	50V	10nF
TERMINALS AND LINKS				
.	TJS59034	AUDIO TERMINAL		
JK351	0330550049	CRT SOCKET		⚠
JK3102	TJB16656	A.V. TERMINAL		
JK3401	0350536400	SCART SOCKET		
JK3402	0350536400	SCART SOCKET		
JK3403	0350536400	SCART SOCKET		
JK3406	TJB8E014	RCA TERMINAL (2P)		
R868	TSF19252	FS LINK		⚠
R874	TSF19402	FS LINK		⚠
SWITCHES				
S840	ESB92S11B	SWITCH		⚠
S1003	EVQ23405R	SWITCH		
S1004	EVQ23405R	SWITCH		
S1005	EVQ23405R	SWITCH		
S1006	EVQ23405R	SWITCH		
S1007	EVQ23405R	SWITCH		

Cct Ref	Parts Number	Description	
RELAYS			
RL801	K6B1ADA00010	RELAY	⚠
RL802	K6B2ADA00004	RELAY	⚠