




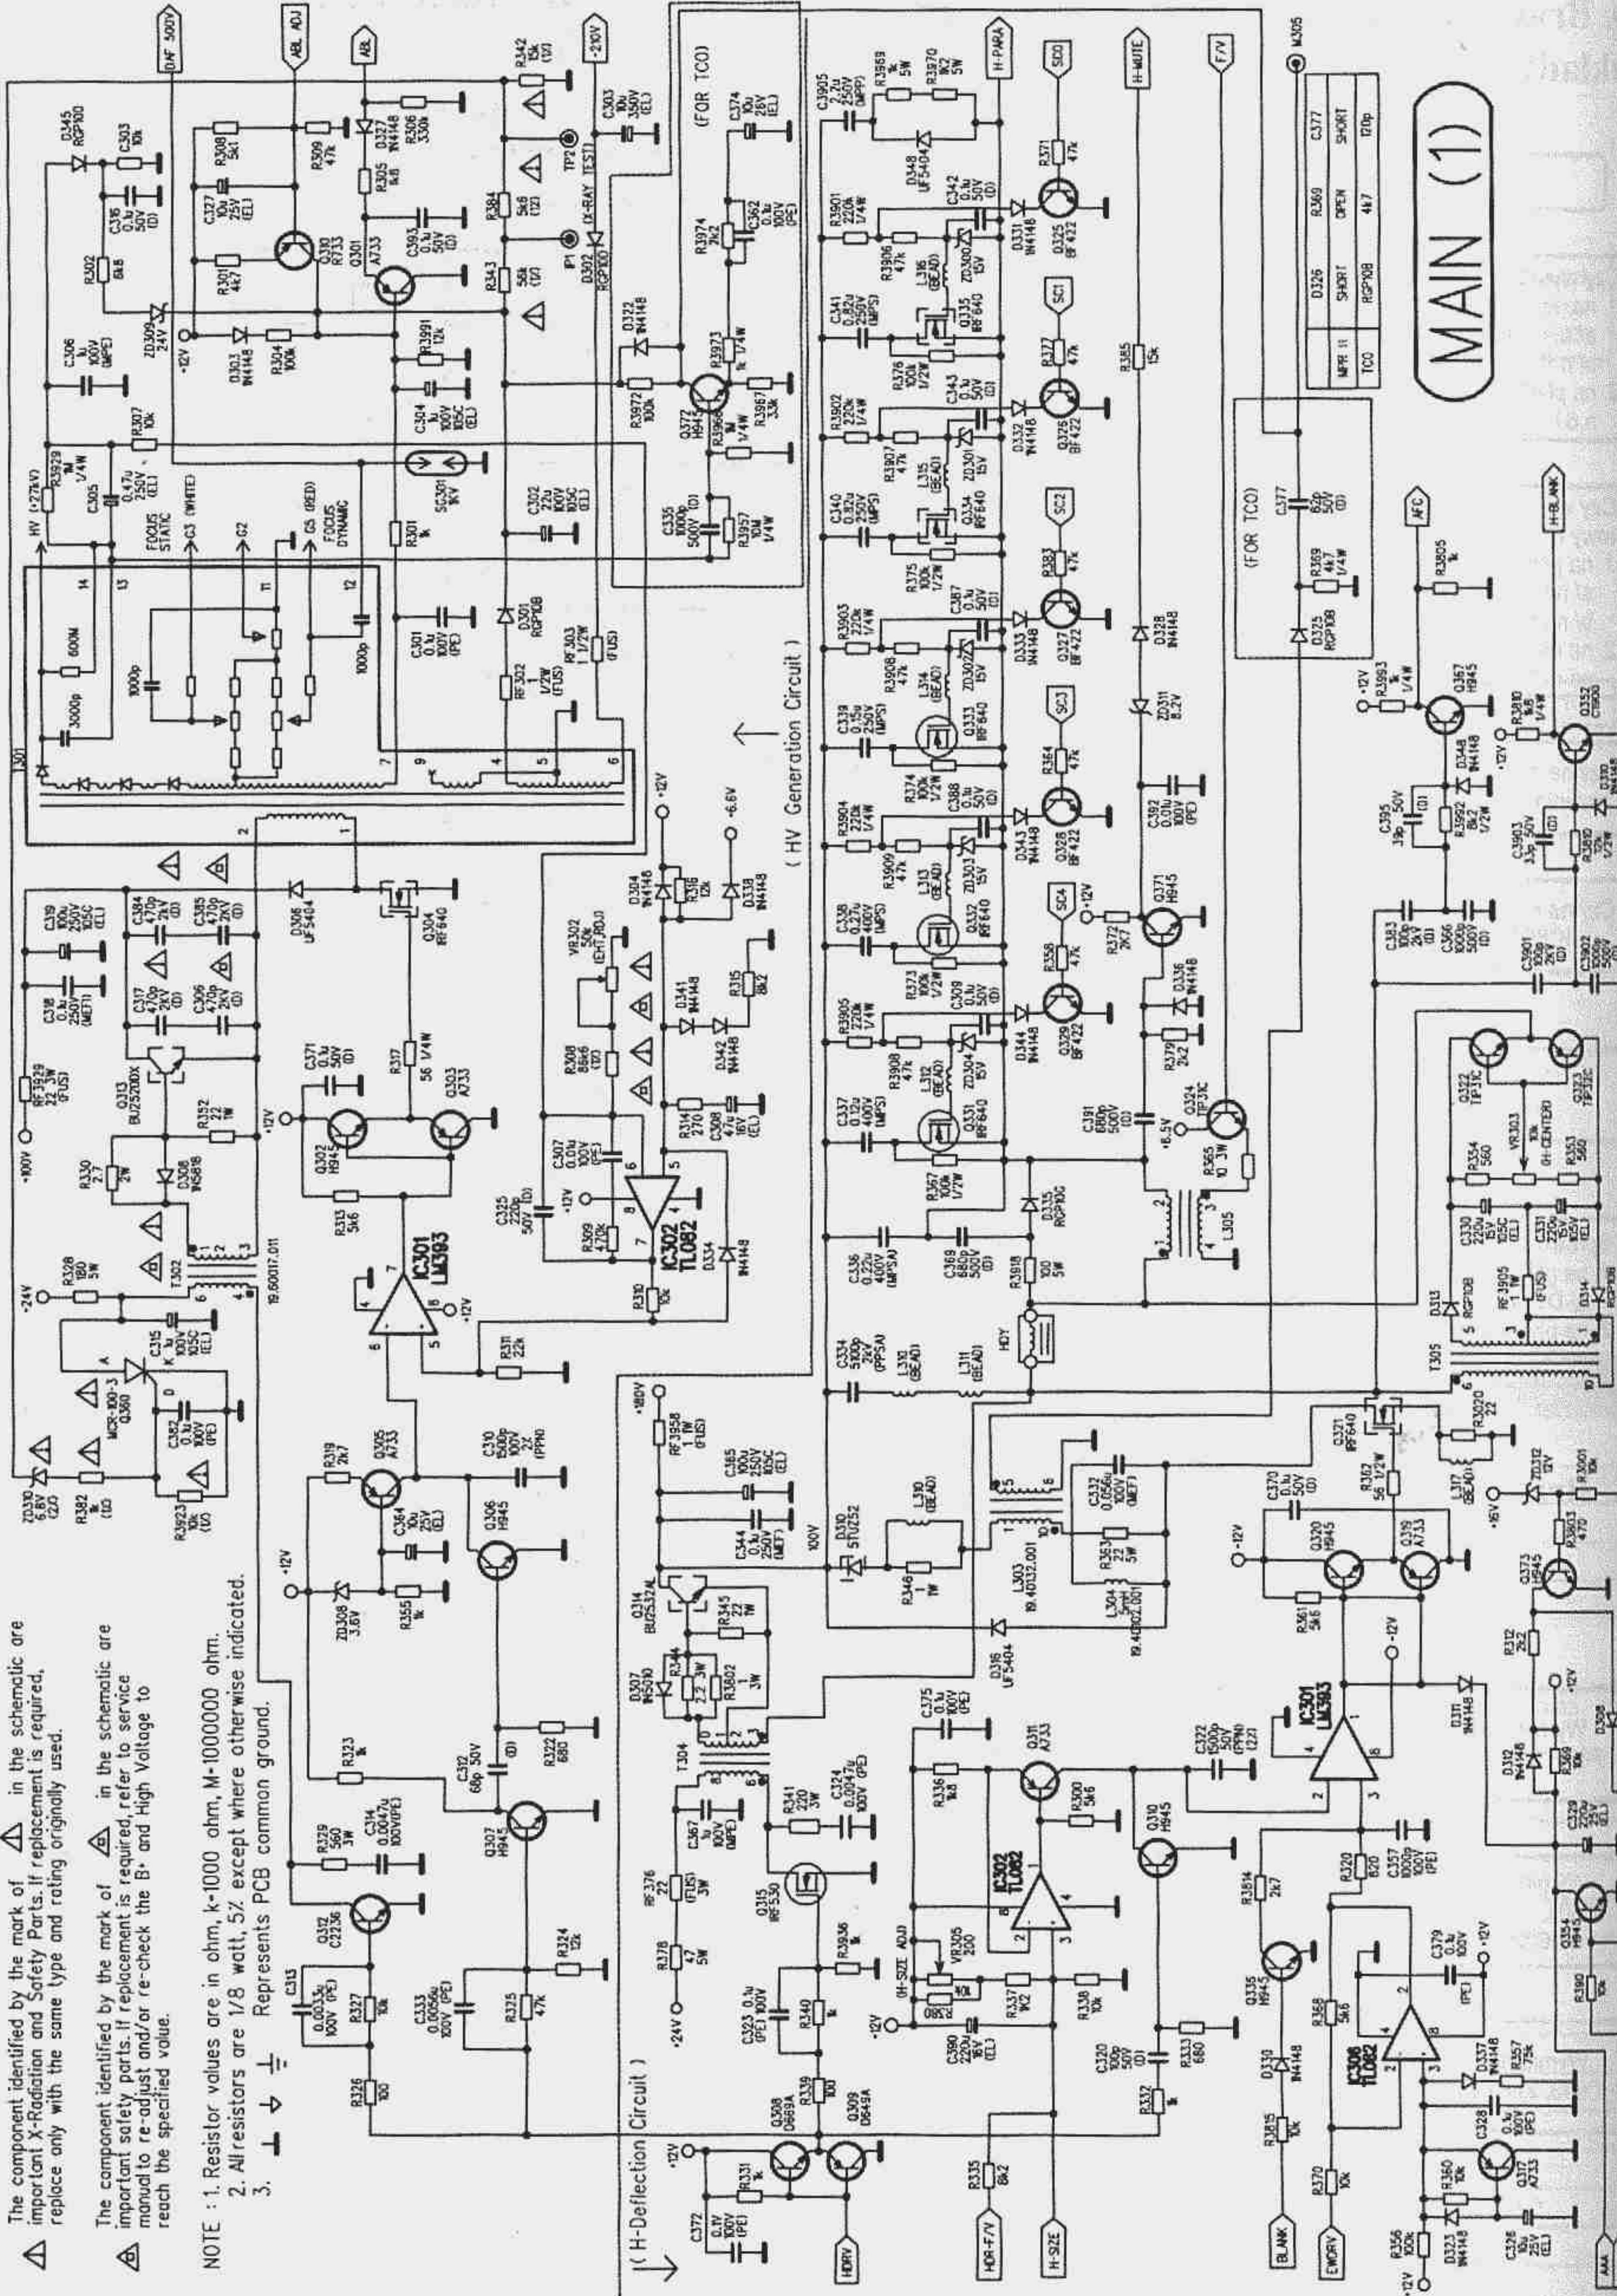


MAIN (2)

NOTE : 1. Resistor values are in ohm, k=1000 ohm, M=1000000 ohm.
2. All resistors are 1/8 watt, 5% except where otherwise indicated.
3. Represents PCB common ground.

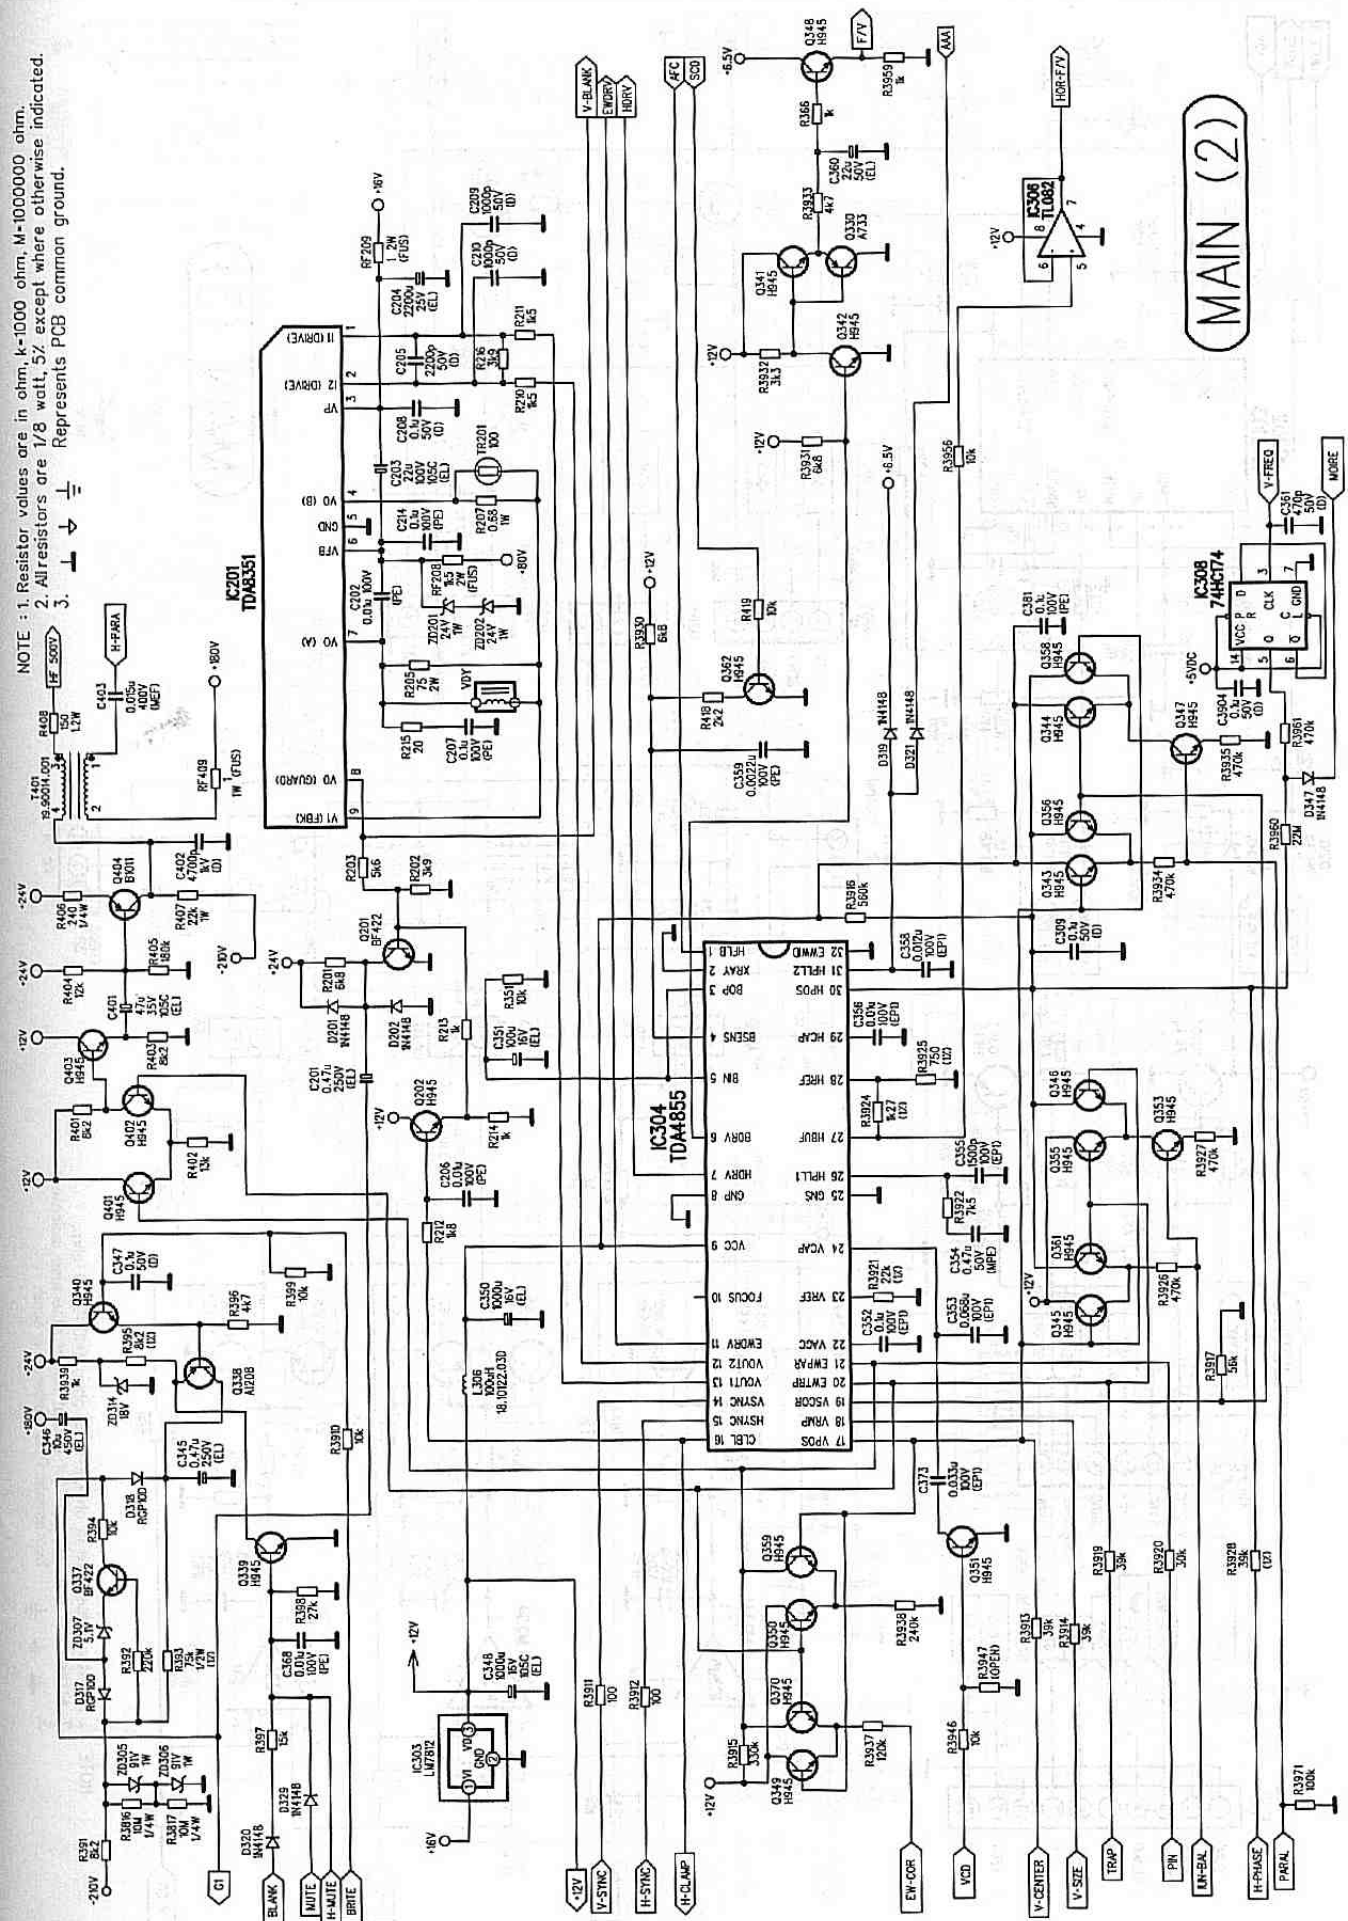


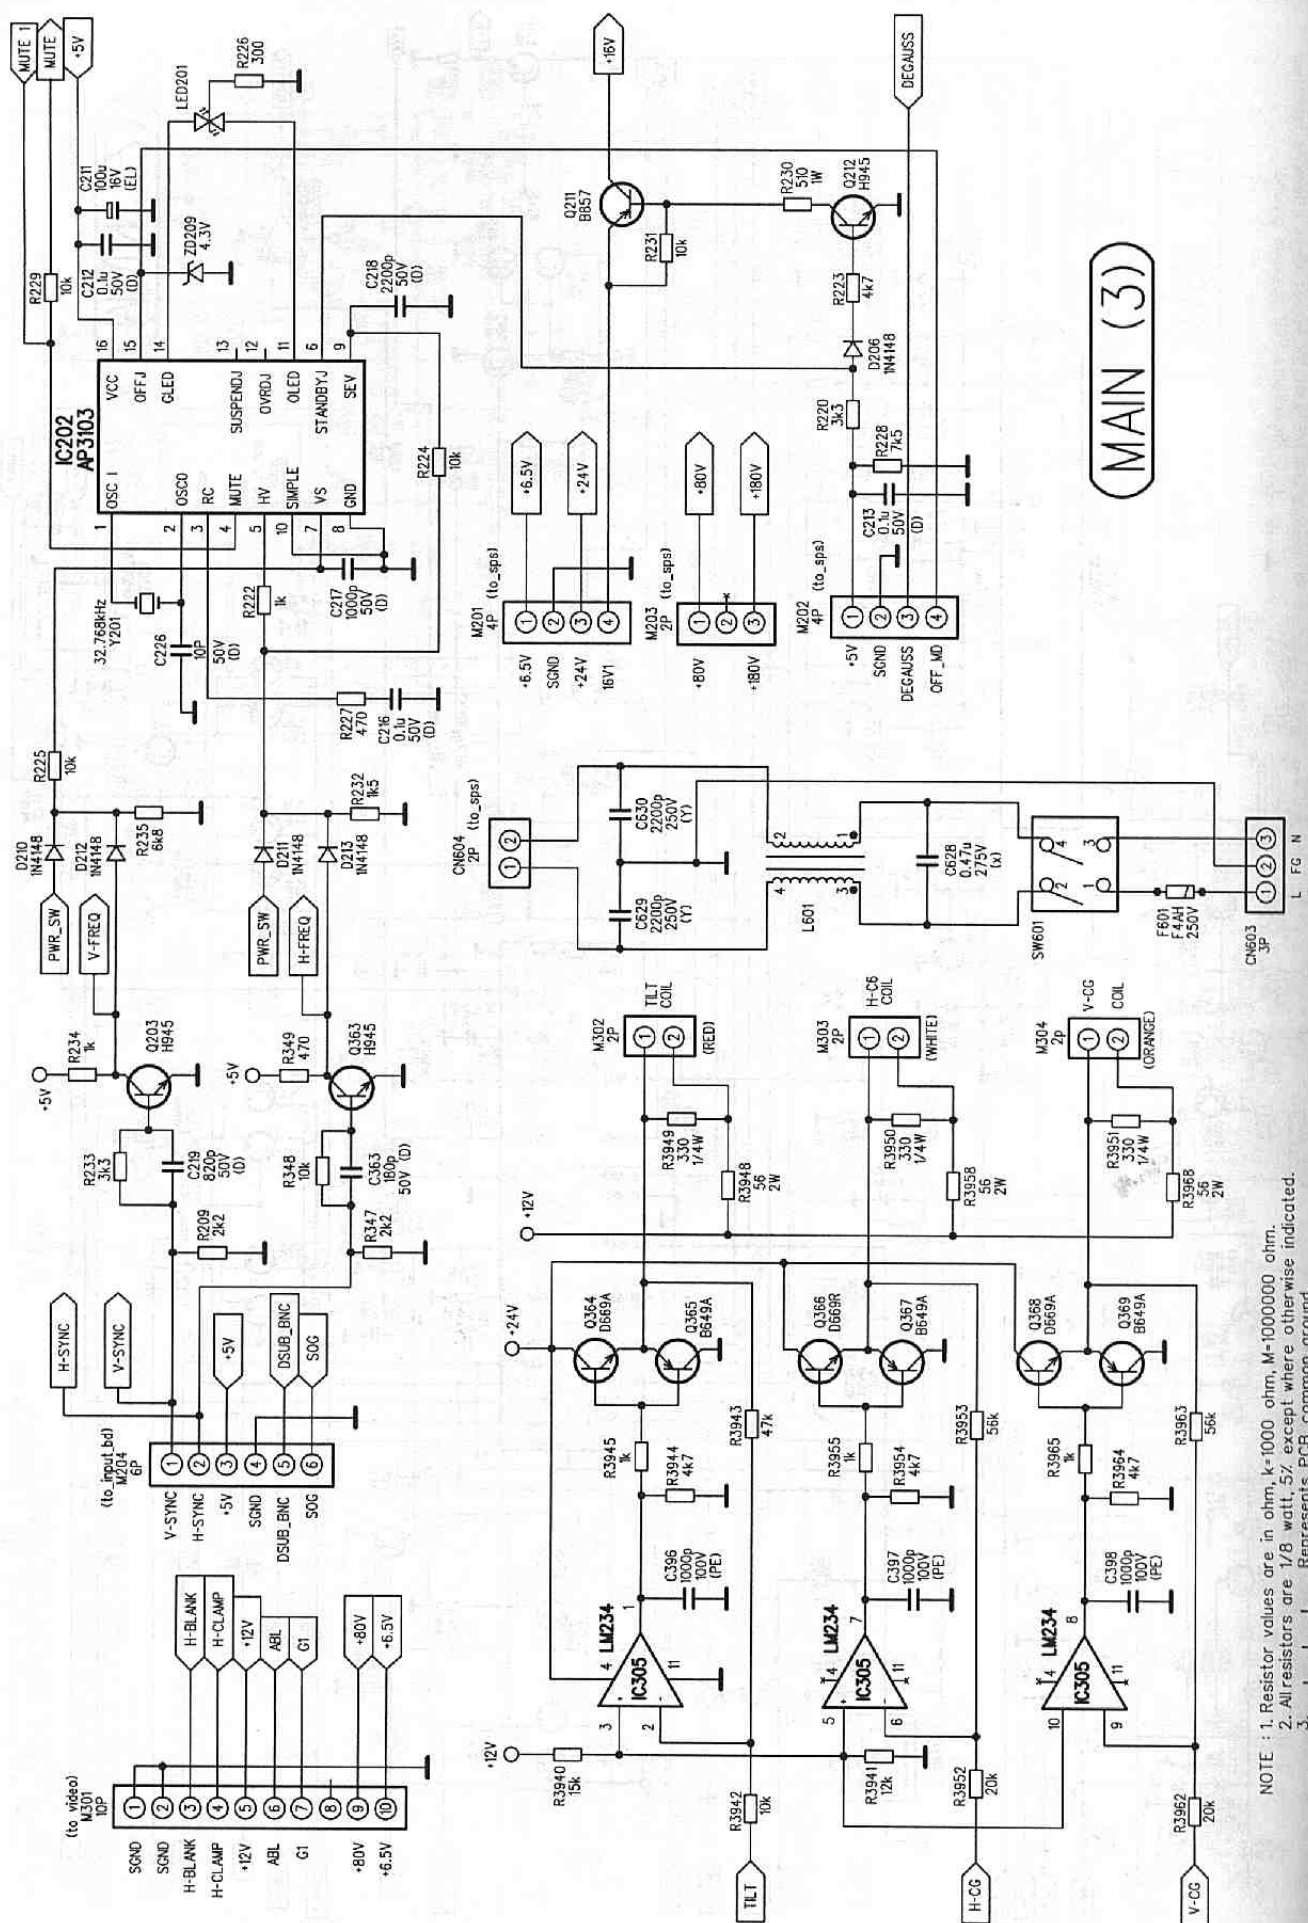

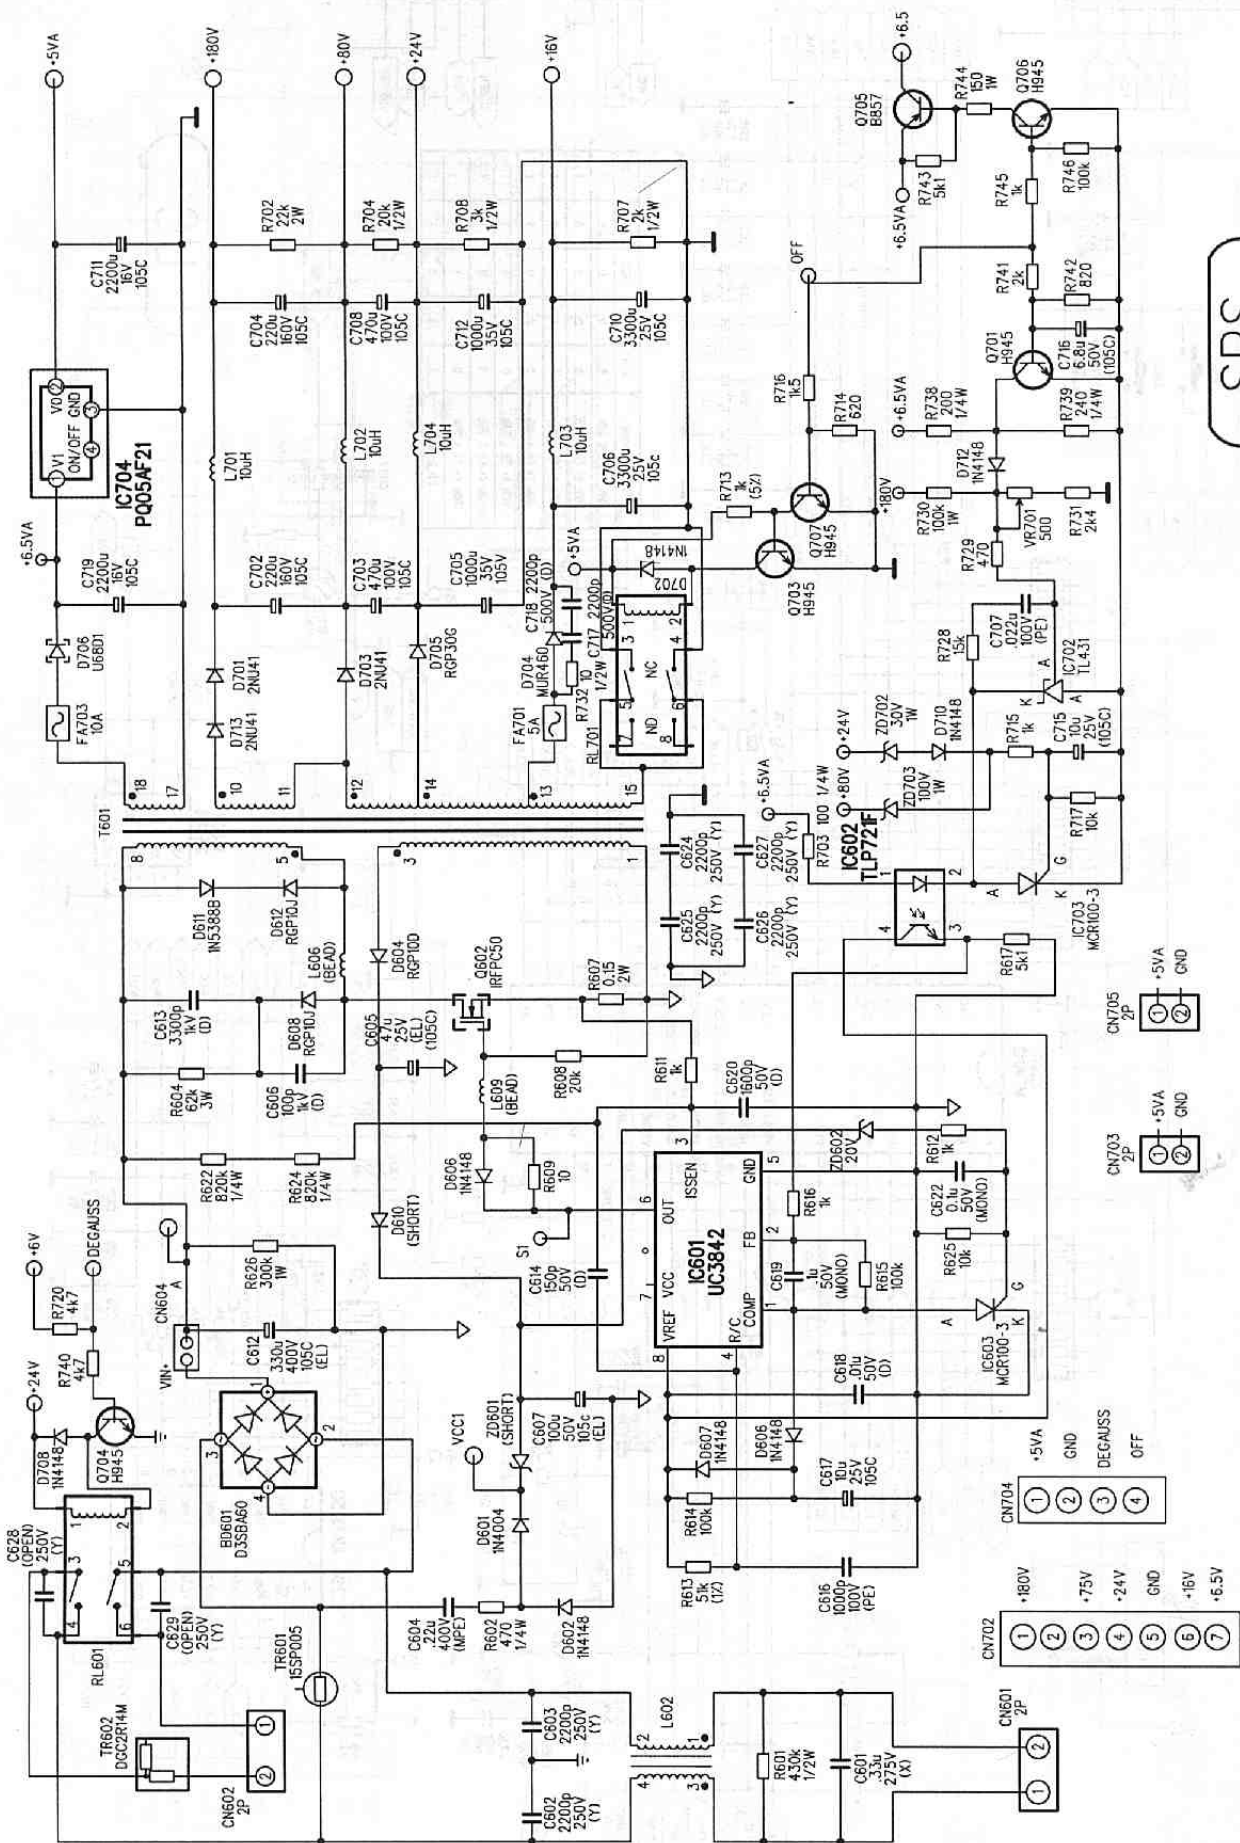


SPS



NOTE : 1. Resistor values are in ohm, k-1000 ohm, M-1000000 ohm.
 2. All resistors are 1/8 watt, except where otherwise indicated.
 3. ∇ represents PCB common ground.
 4. Zener Diode is 1/2w except where otherwise indicated.

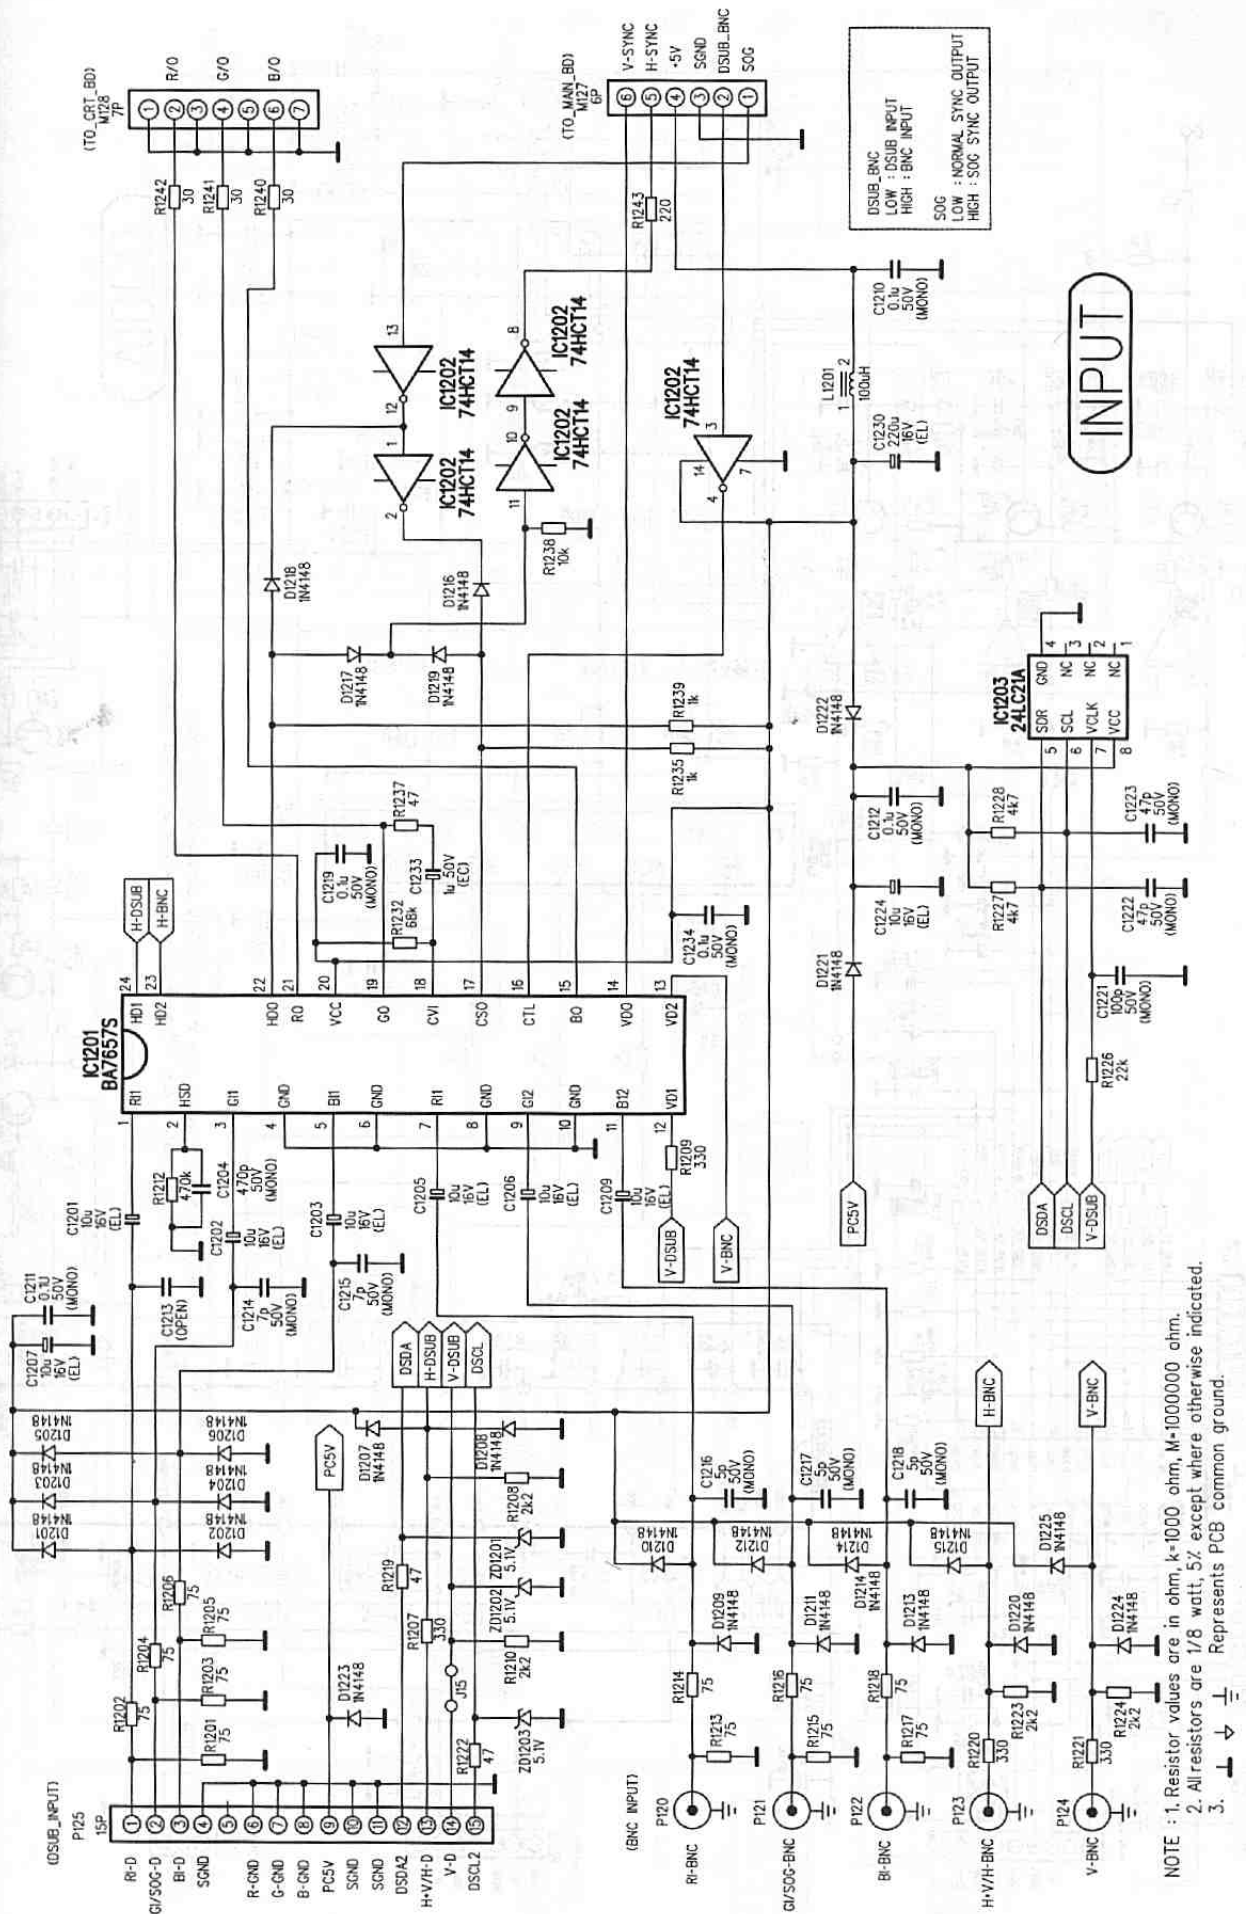

INPUT

NOTE : 1. Resistor values are in ohm, k=1000 ohm, M=1000000 ohm.
 2. All resistors are 1/8 watt, 5% except where otherwise indicated.
 3. $\perp$ ∇ $\vdash$ Represents PCB common ground.

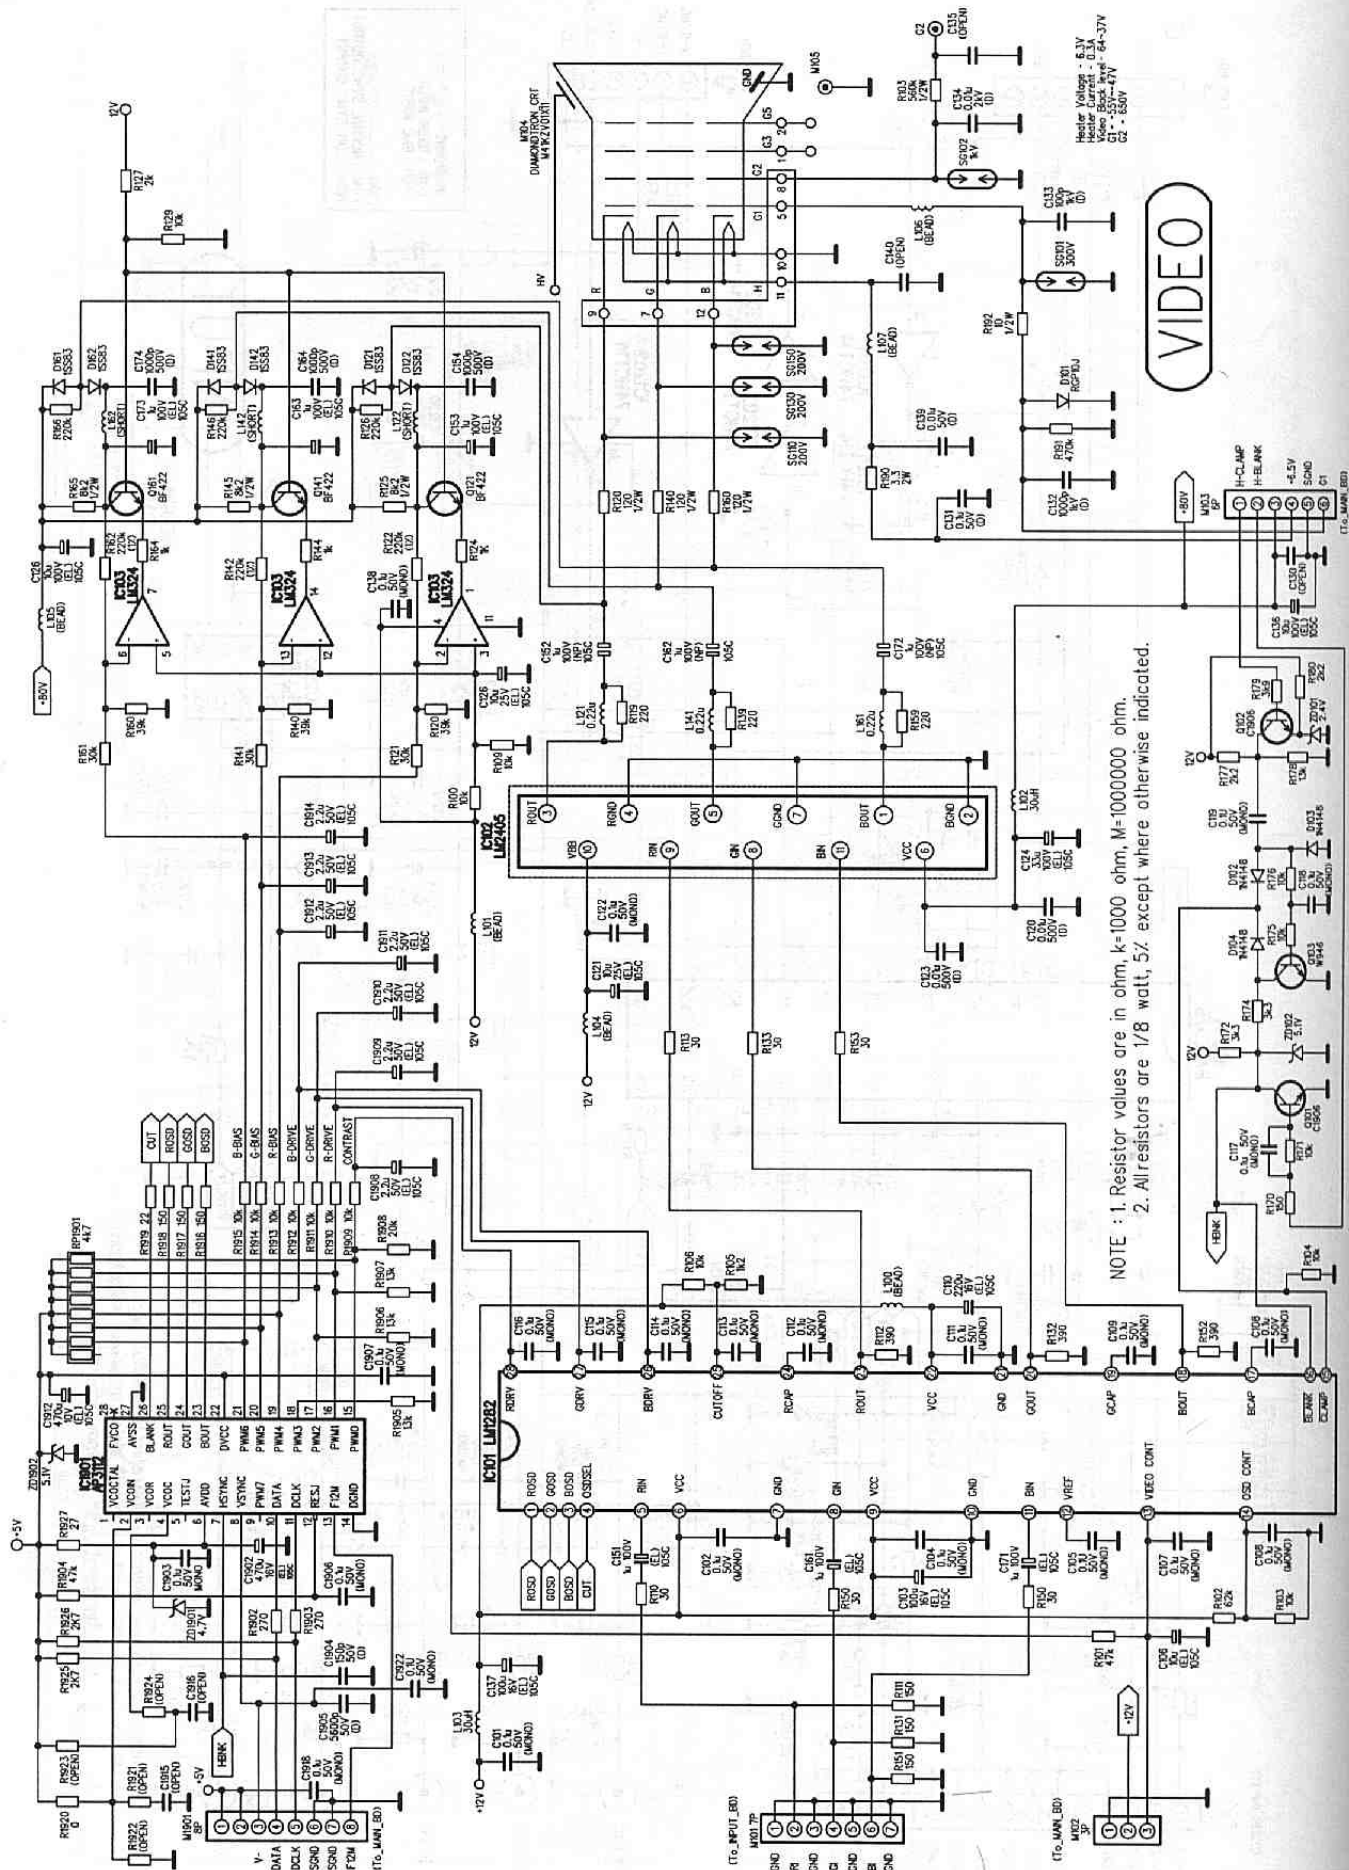

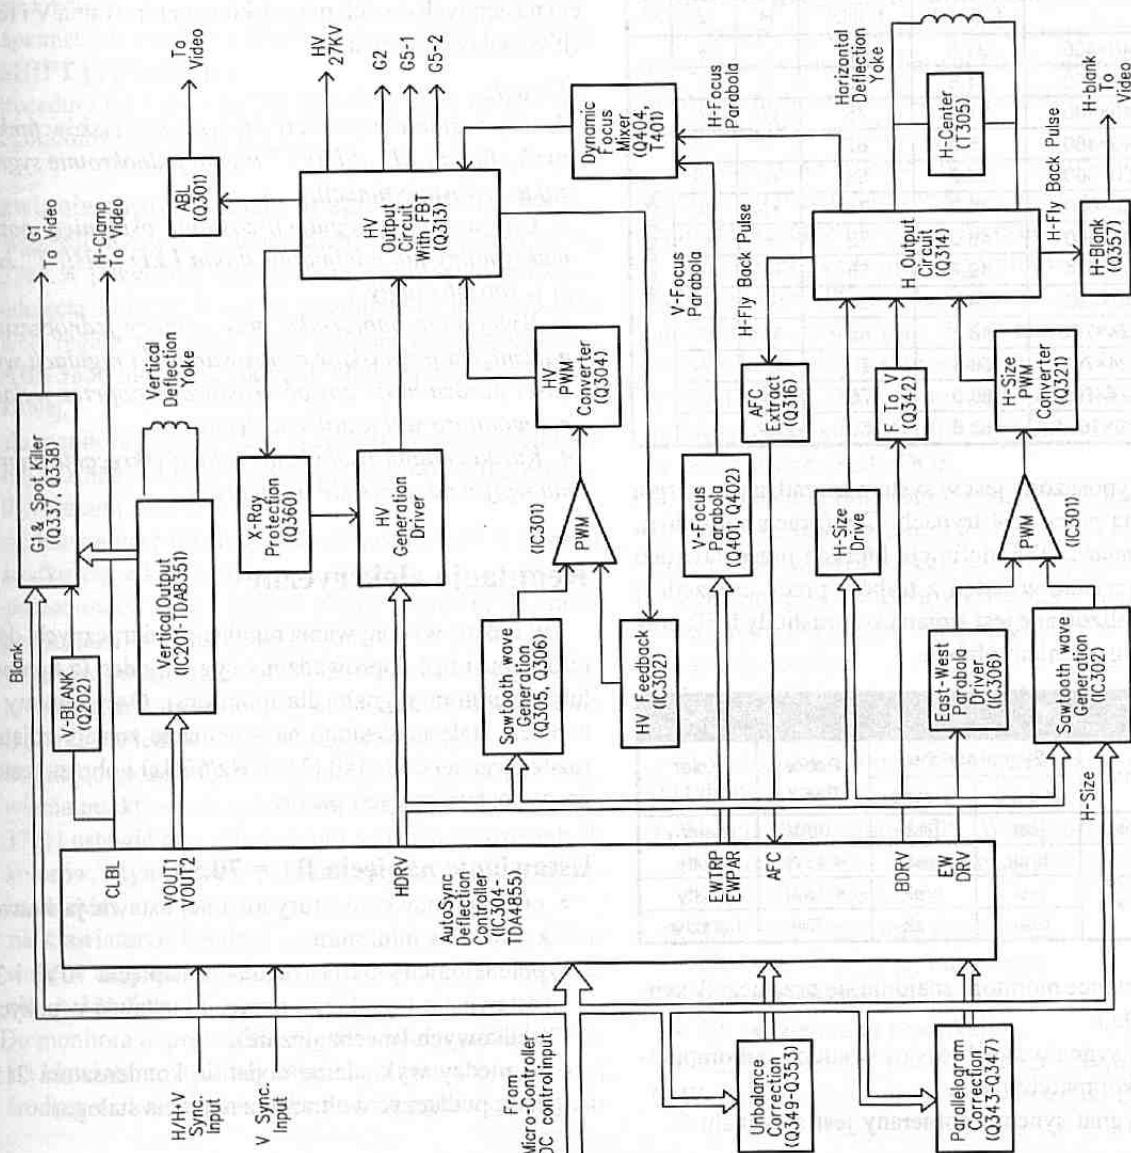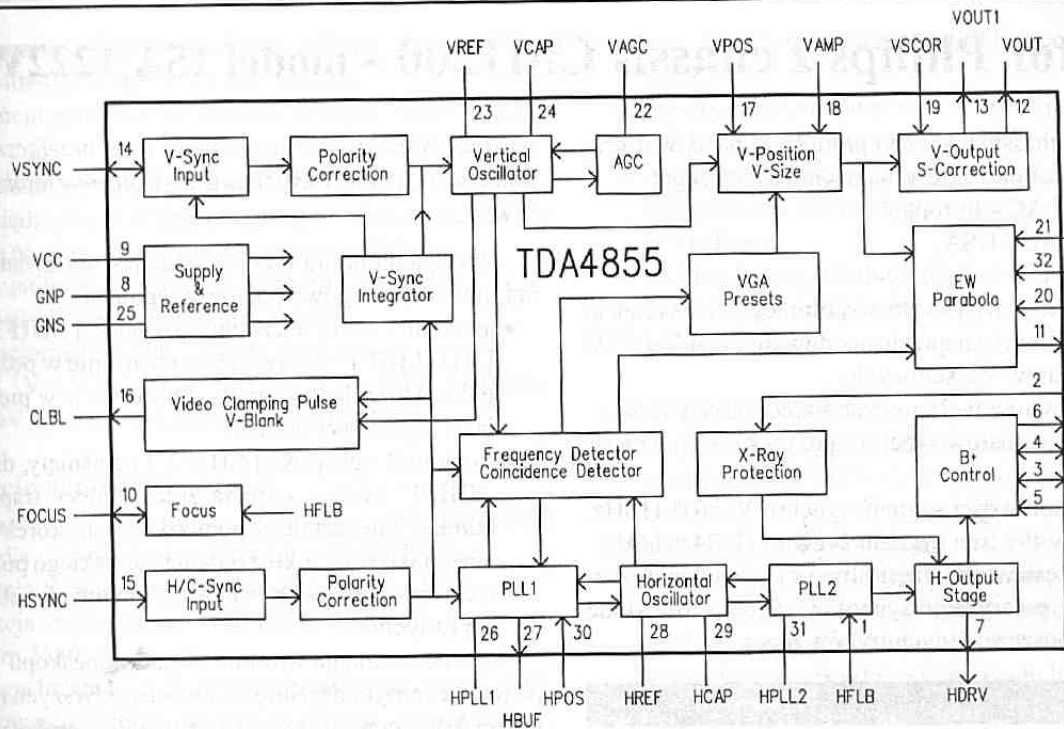

FI
Function block of deflection output circuit