

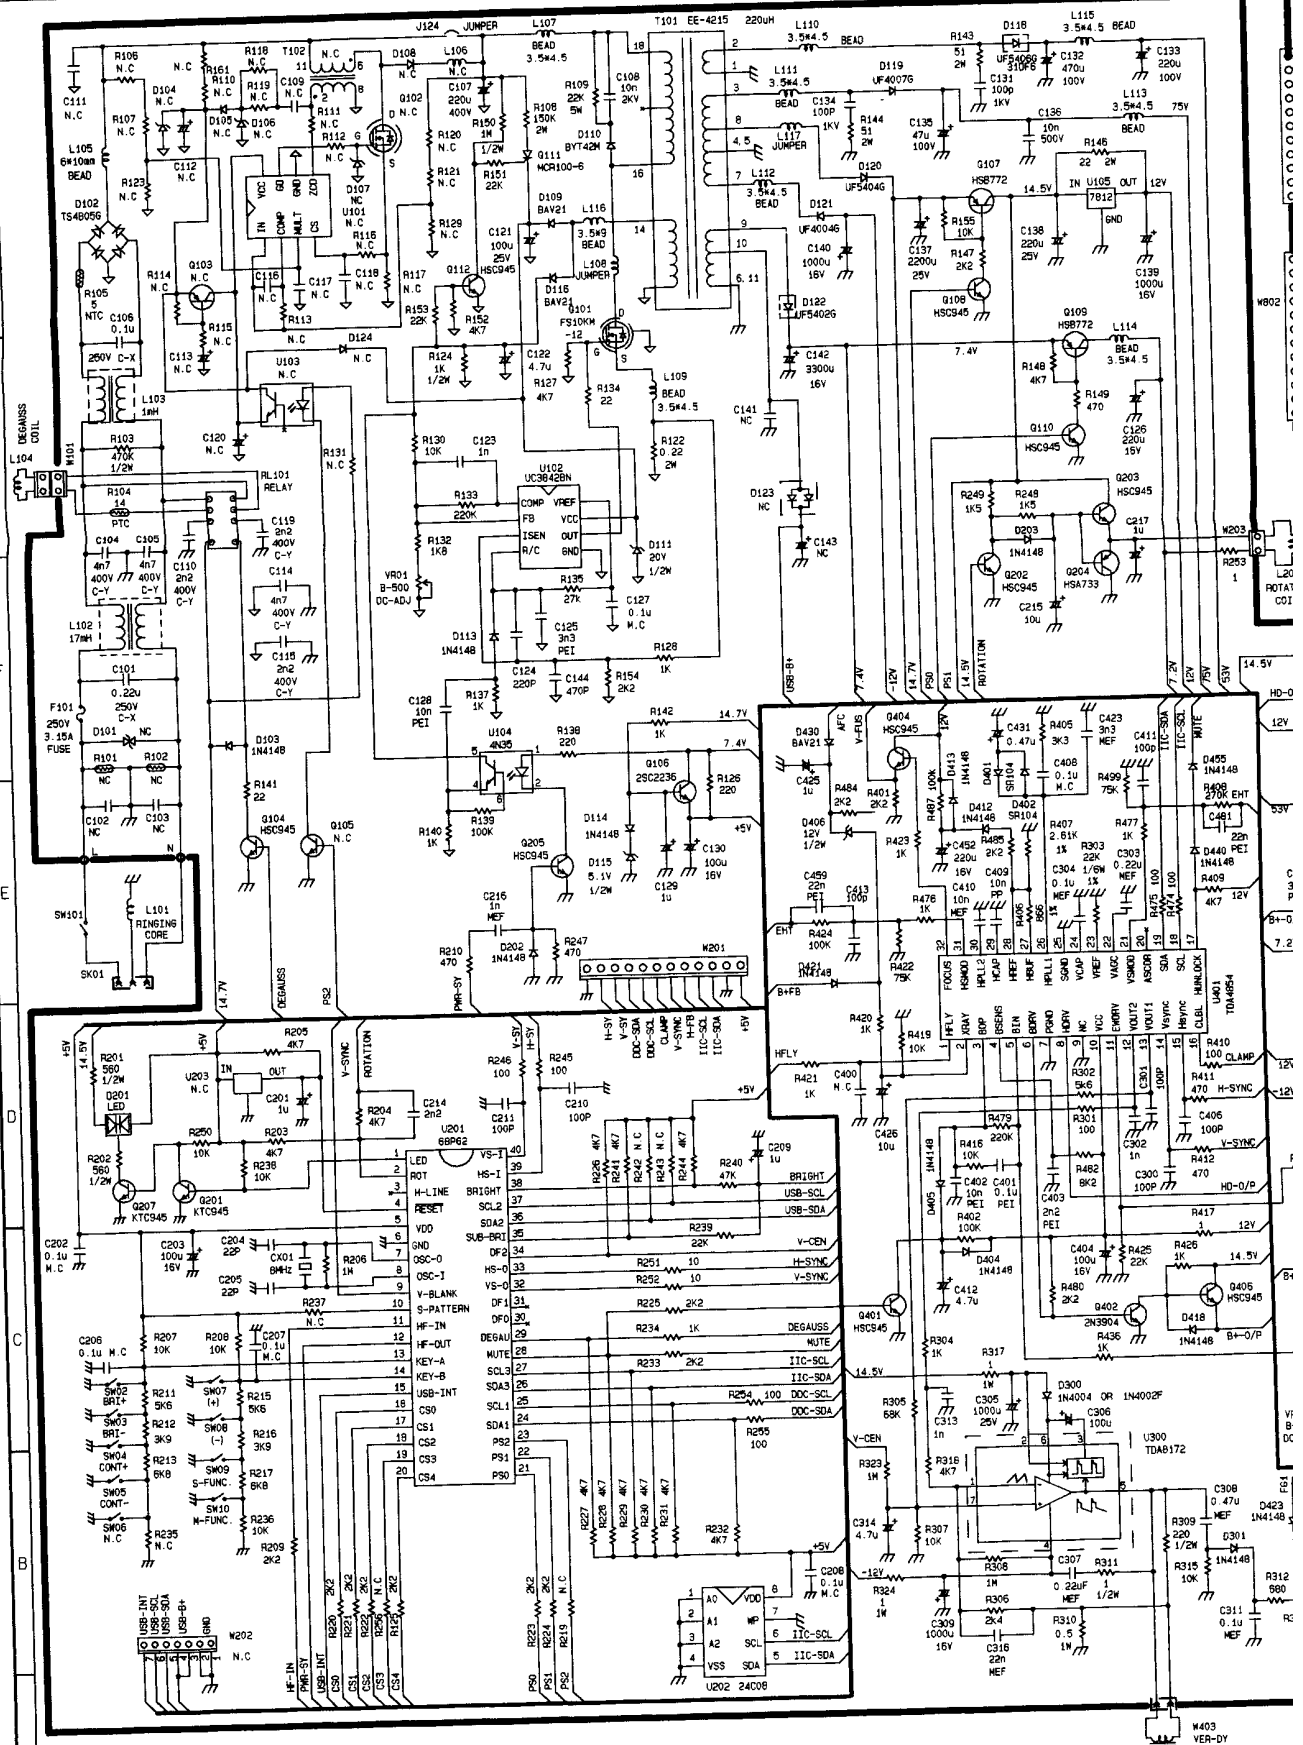


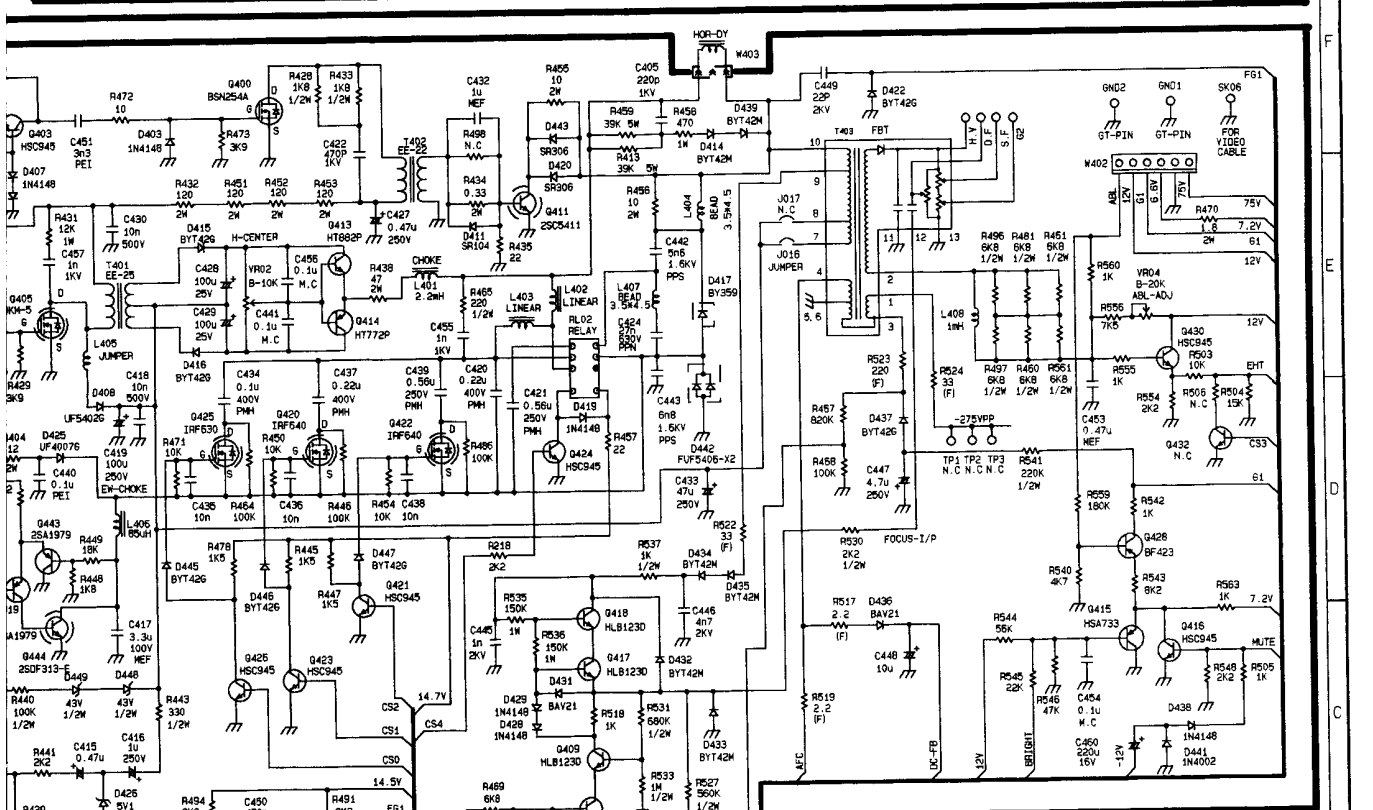

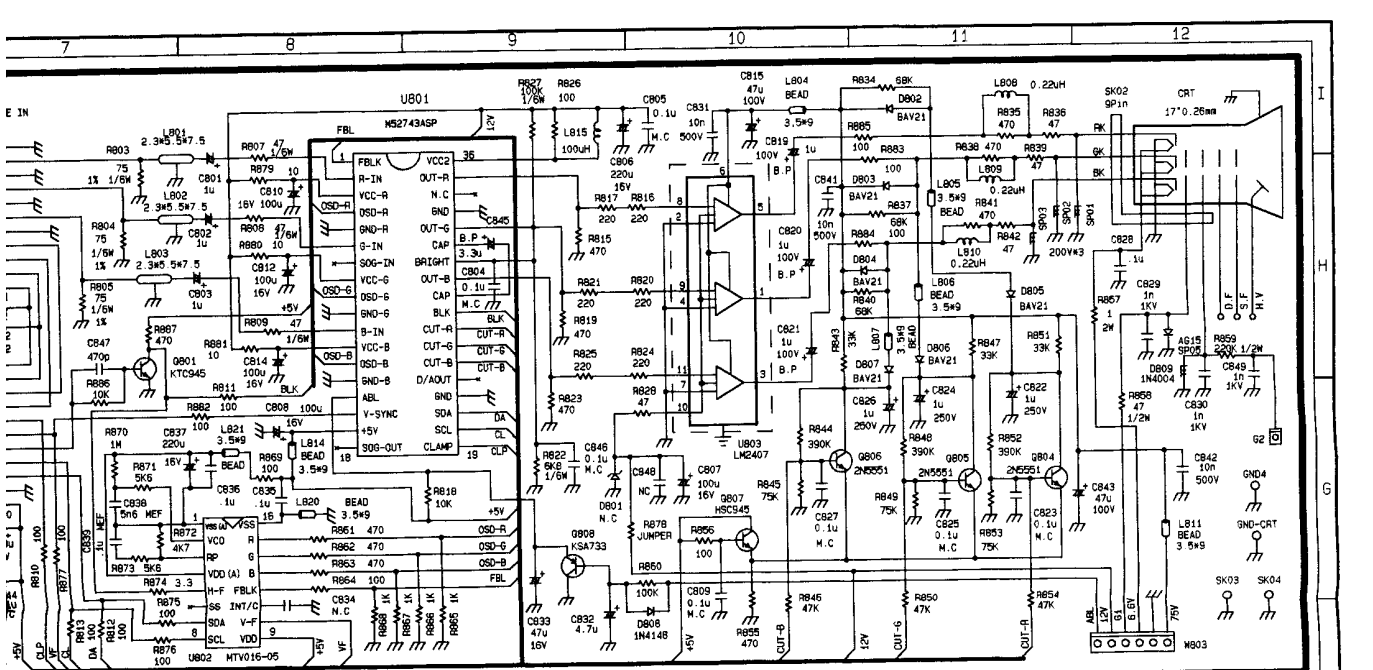

- NOTE:
- (1) All values of resistors are in Ohms; 1/4 wattages; +/- 5%, except specified notes on diagrams.
 - (2) All values of capacitors are in "Farads".
 - (3) The value of electrolytic capacitors are 50 volts rating, except specified notes on diagrams. (E.C. SYM $\frac{+}{-}$)
 - (4) The value of c.c. are 50 volts rating, except specified notes on diagrams. (C.C. SYM $\frac{+}{-}$)
 - (5) The chassis ground is indicated as --- .
 - (6) The Zener diodes are 1/2 wattages type.
 - (7) The varied resistor are +/- 20% 1/2 wattages type.

H-FREQ	C50	C51	C52	C53	C54	P50	P51	P52
H-20KHZ	0	0	0	0	1	1	1	1
20KHZ<H<30KHZ	0	0	0	0	1	1	1	1
30KHZ<H<41KHZ	1	1	0	0	1	1	1	1
41KHZ<H<44.5KHZ	1	1	0	1	1	1	1	1
44.5KHZ<H<50.5KHZ	1	1	1	1	1	1	1	1
50.5KHZ<H<58.5KHZ	0	0	1	1	0	1	1	1
58.5KHZ<H<65KHZ	1	0	1	1	0	1	1	1
65KHZ<H<70KHZ	0	1	1	1	0	1	1	1
70KHZ<H<80KHZ	1	1	1	1	0	1	1	1
OVERIDE	0	0	1	0	1	1	1	1
BURN-IN-1	0	0	0	0	1	1	1	1
BURN-IN-2	0	1	1	0	0	1	1	1
BURN-IN-3	1	1	1	0	0	1	1	1
STAND-BY	0	0	0	0	0	0	1	1
OFF MODE	0	0	0	0	0	0	0	0

ROYAL INFORMATION ELECTRONICS CO., LTD

MODEL: OH-1764U	SHEET NO.	DESIGN	DRAWING
ITEM: MAIN/CRT	DATE: JULY-31-1998	PREPARE	C.H.TSENG
FILE NAME: X-786	SCH REV: 0.5	CHECKED	
ECN NO:		APPROVED	