




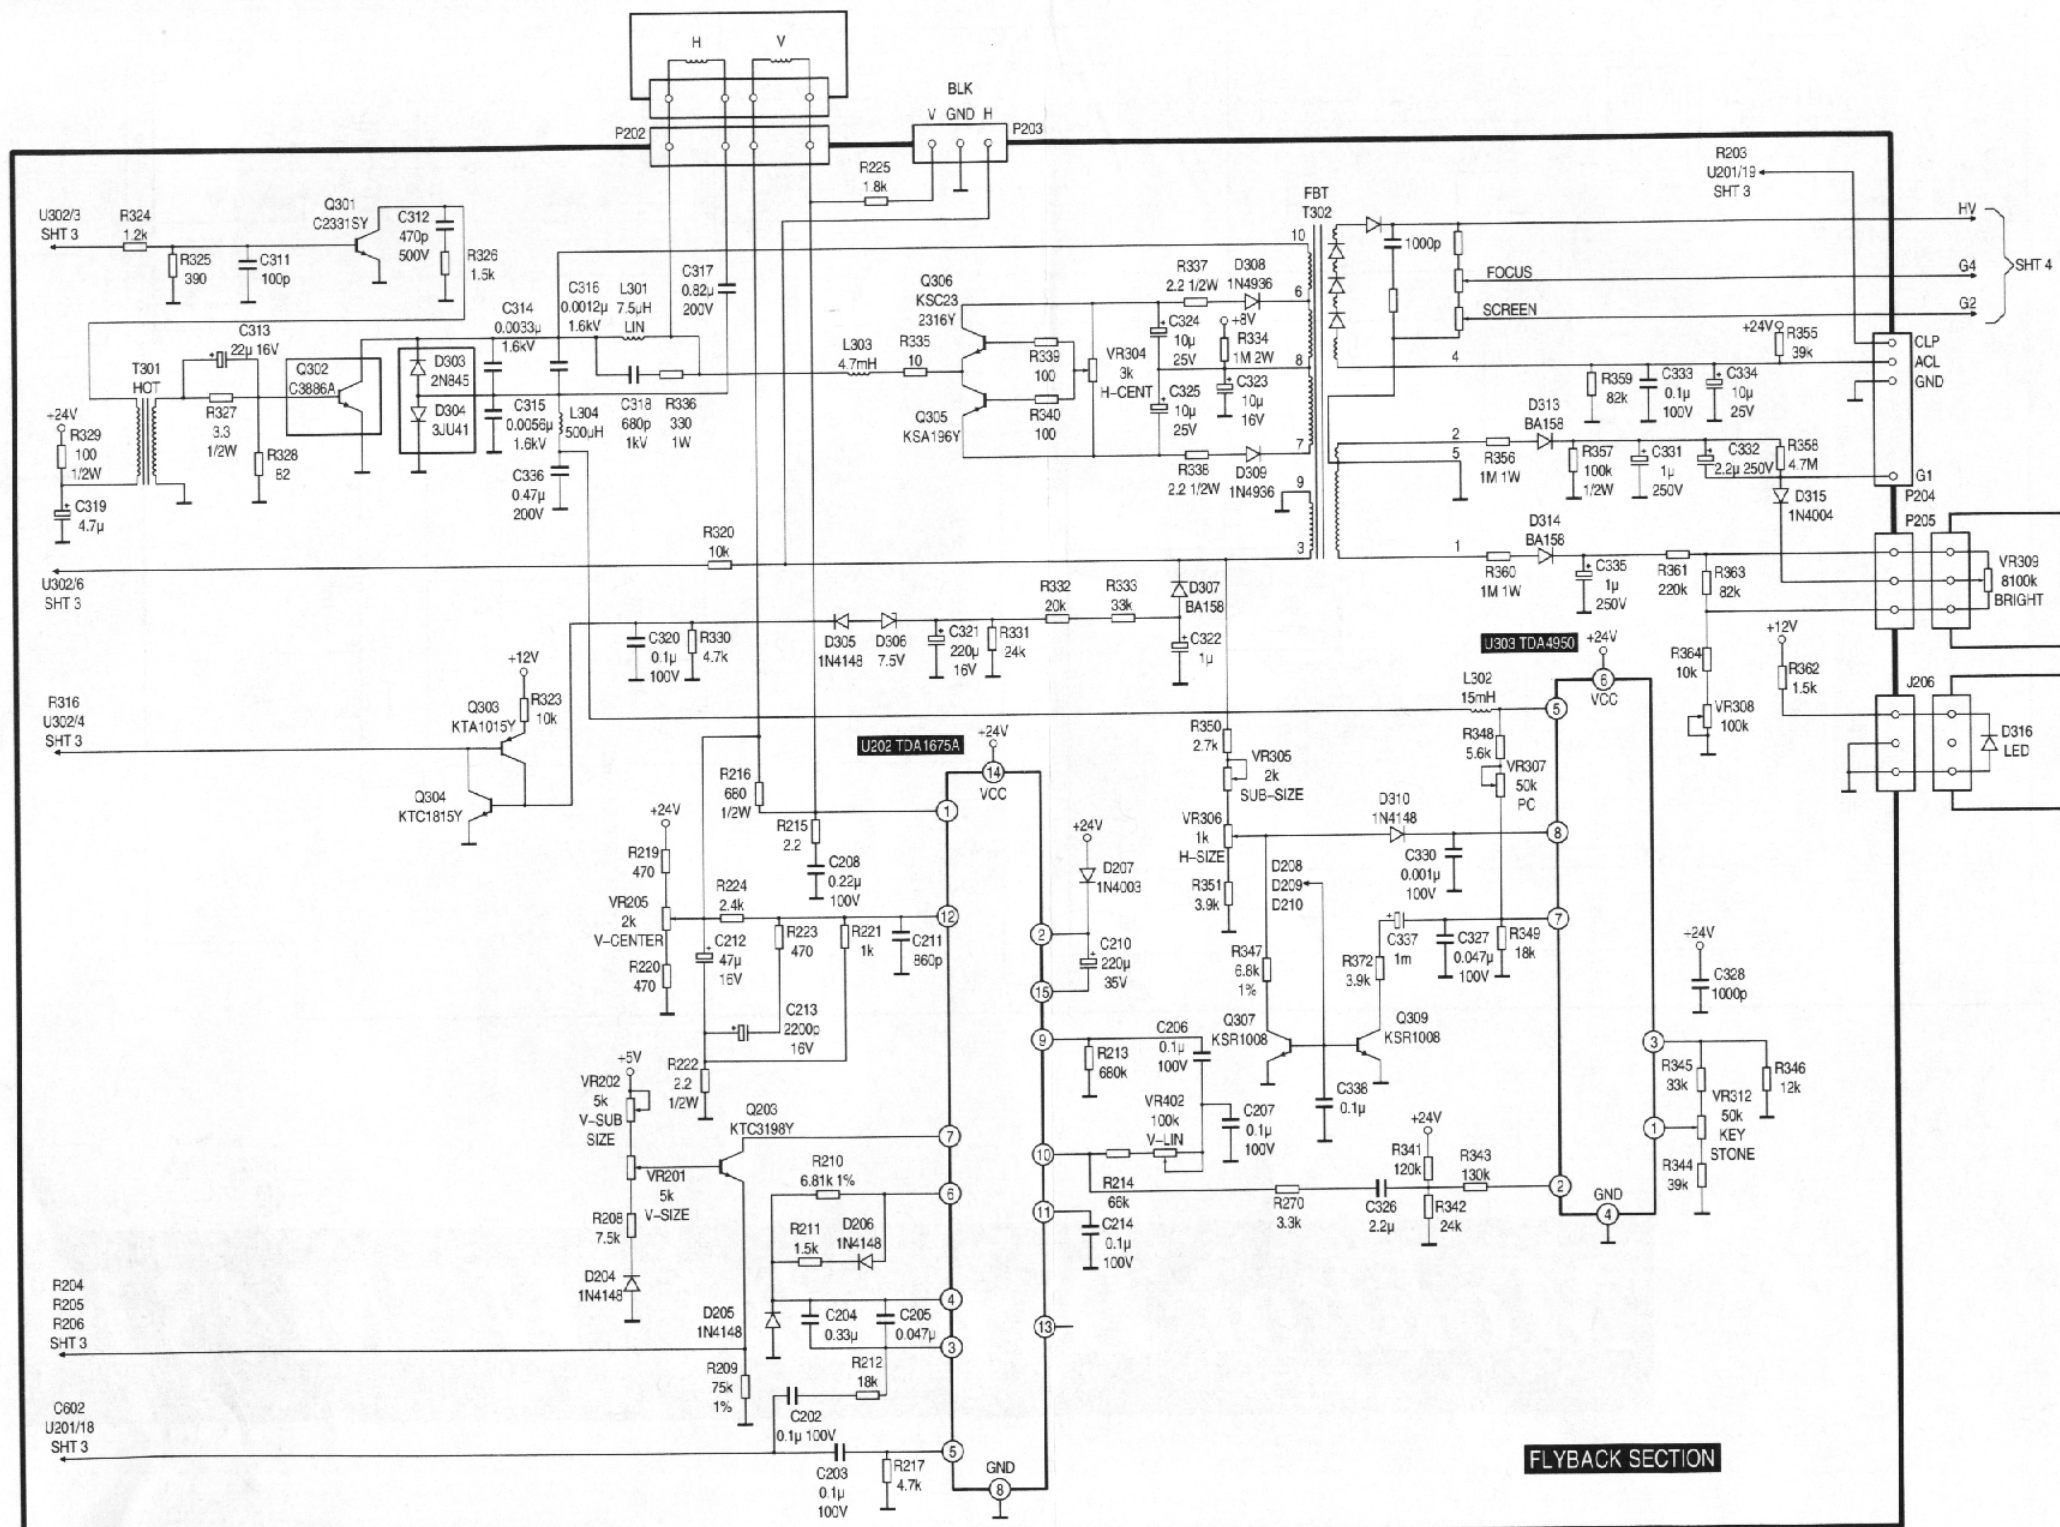


FLYBACK SECTION

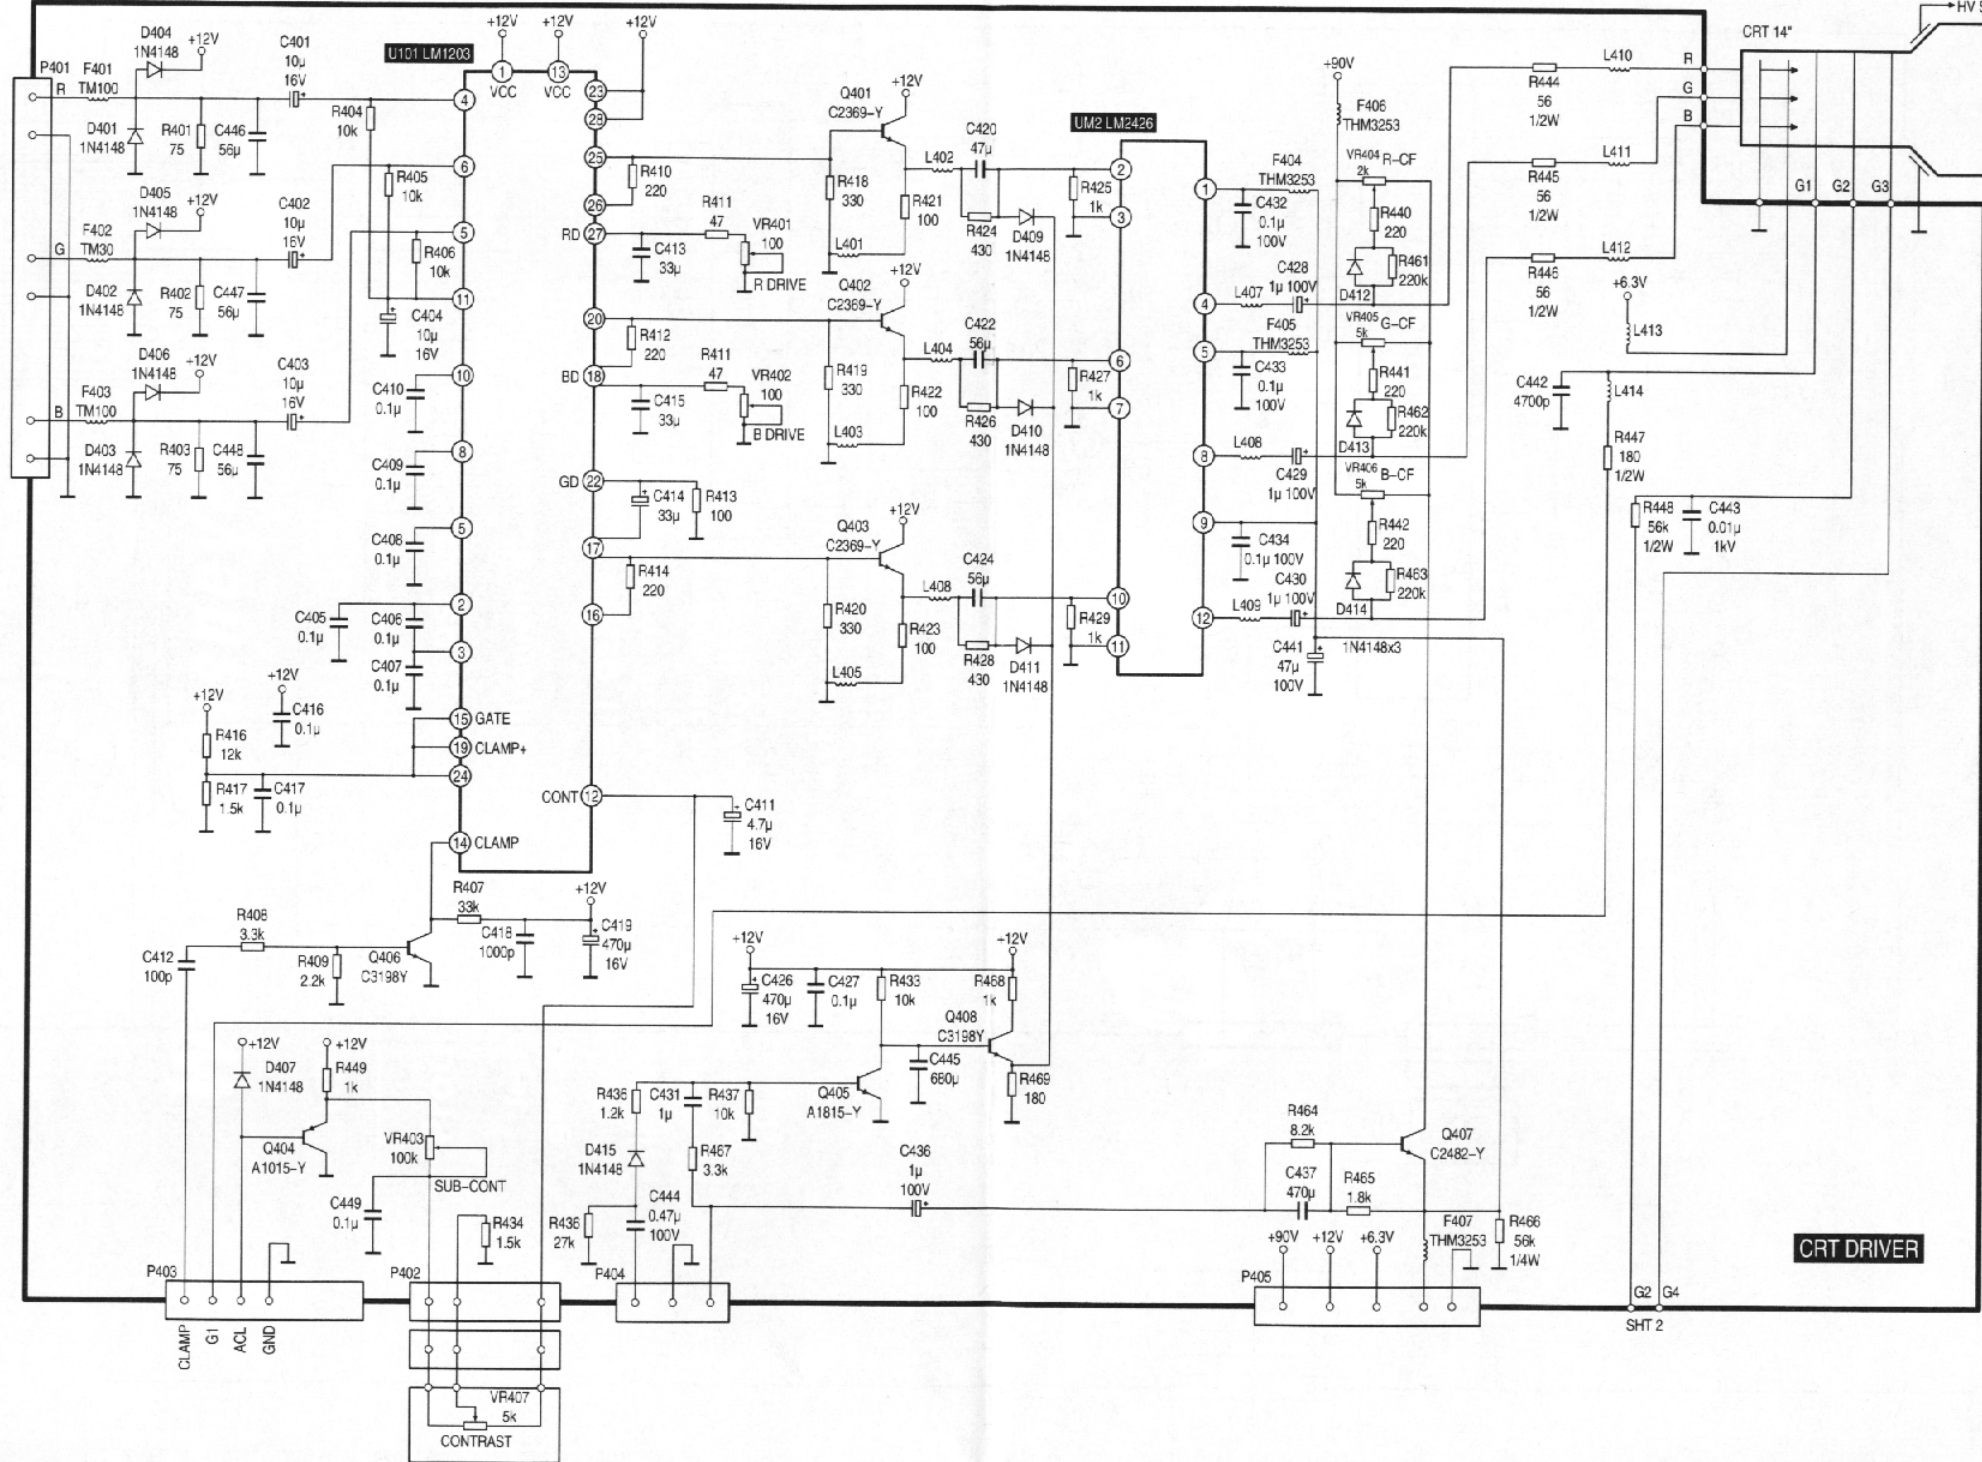

HORIZONTAL AND VERTICAL SECTION

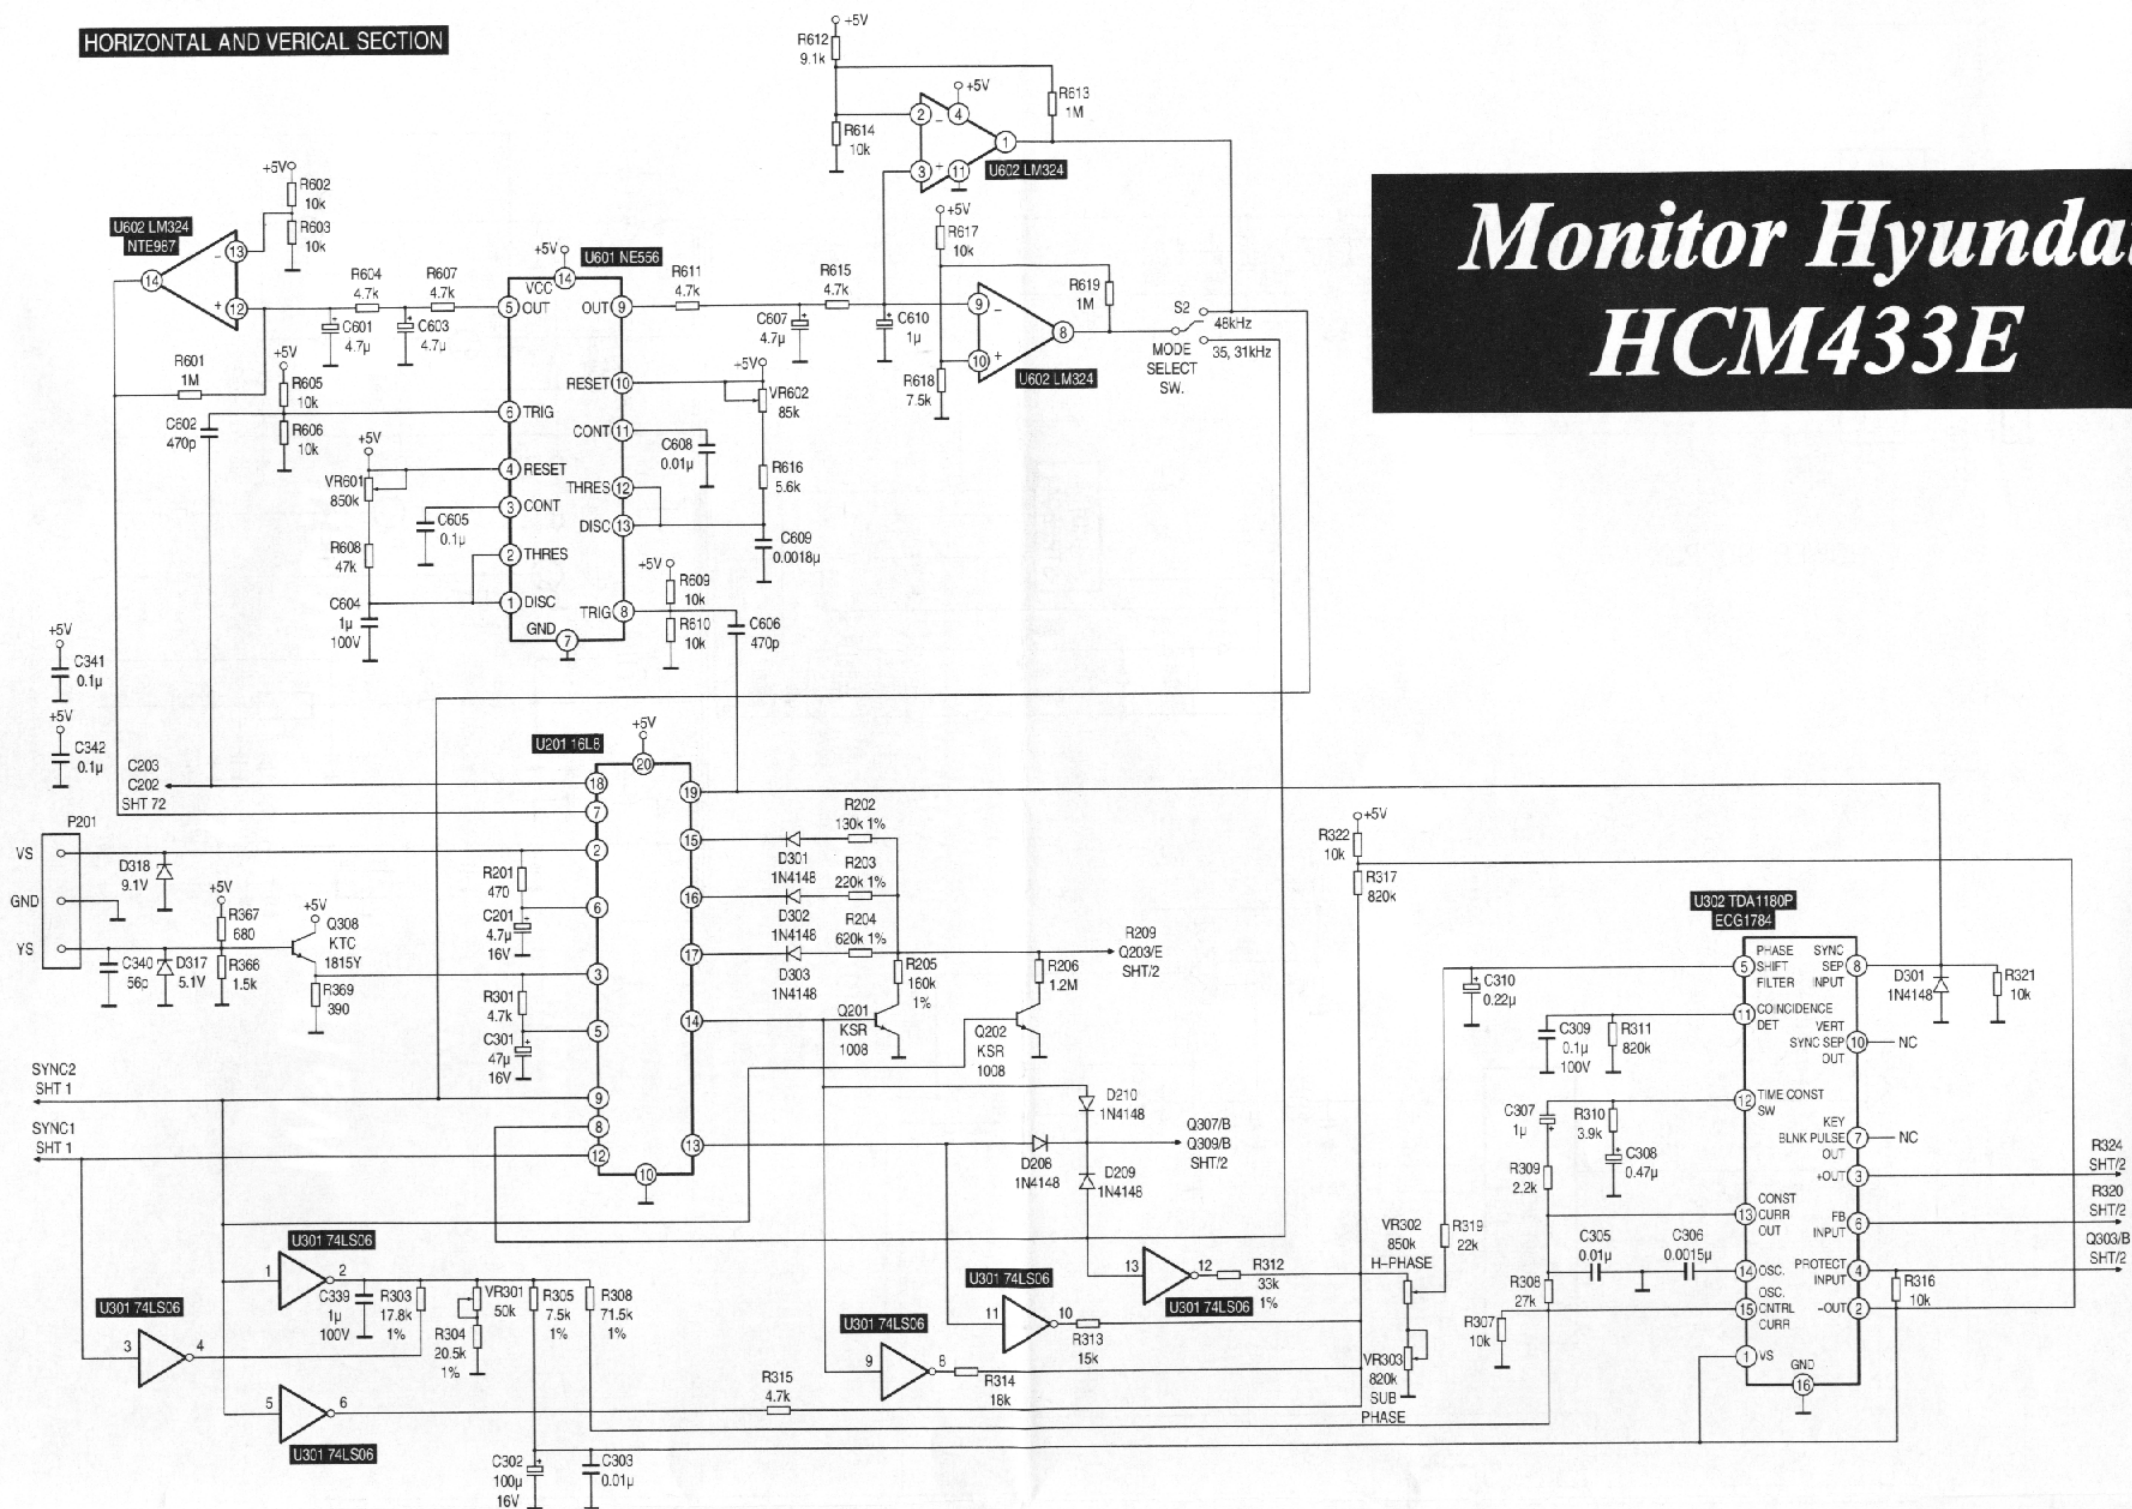

Monitor Hyundai HCM433E

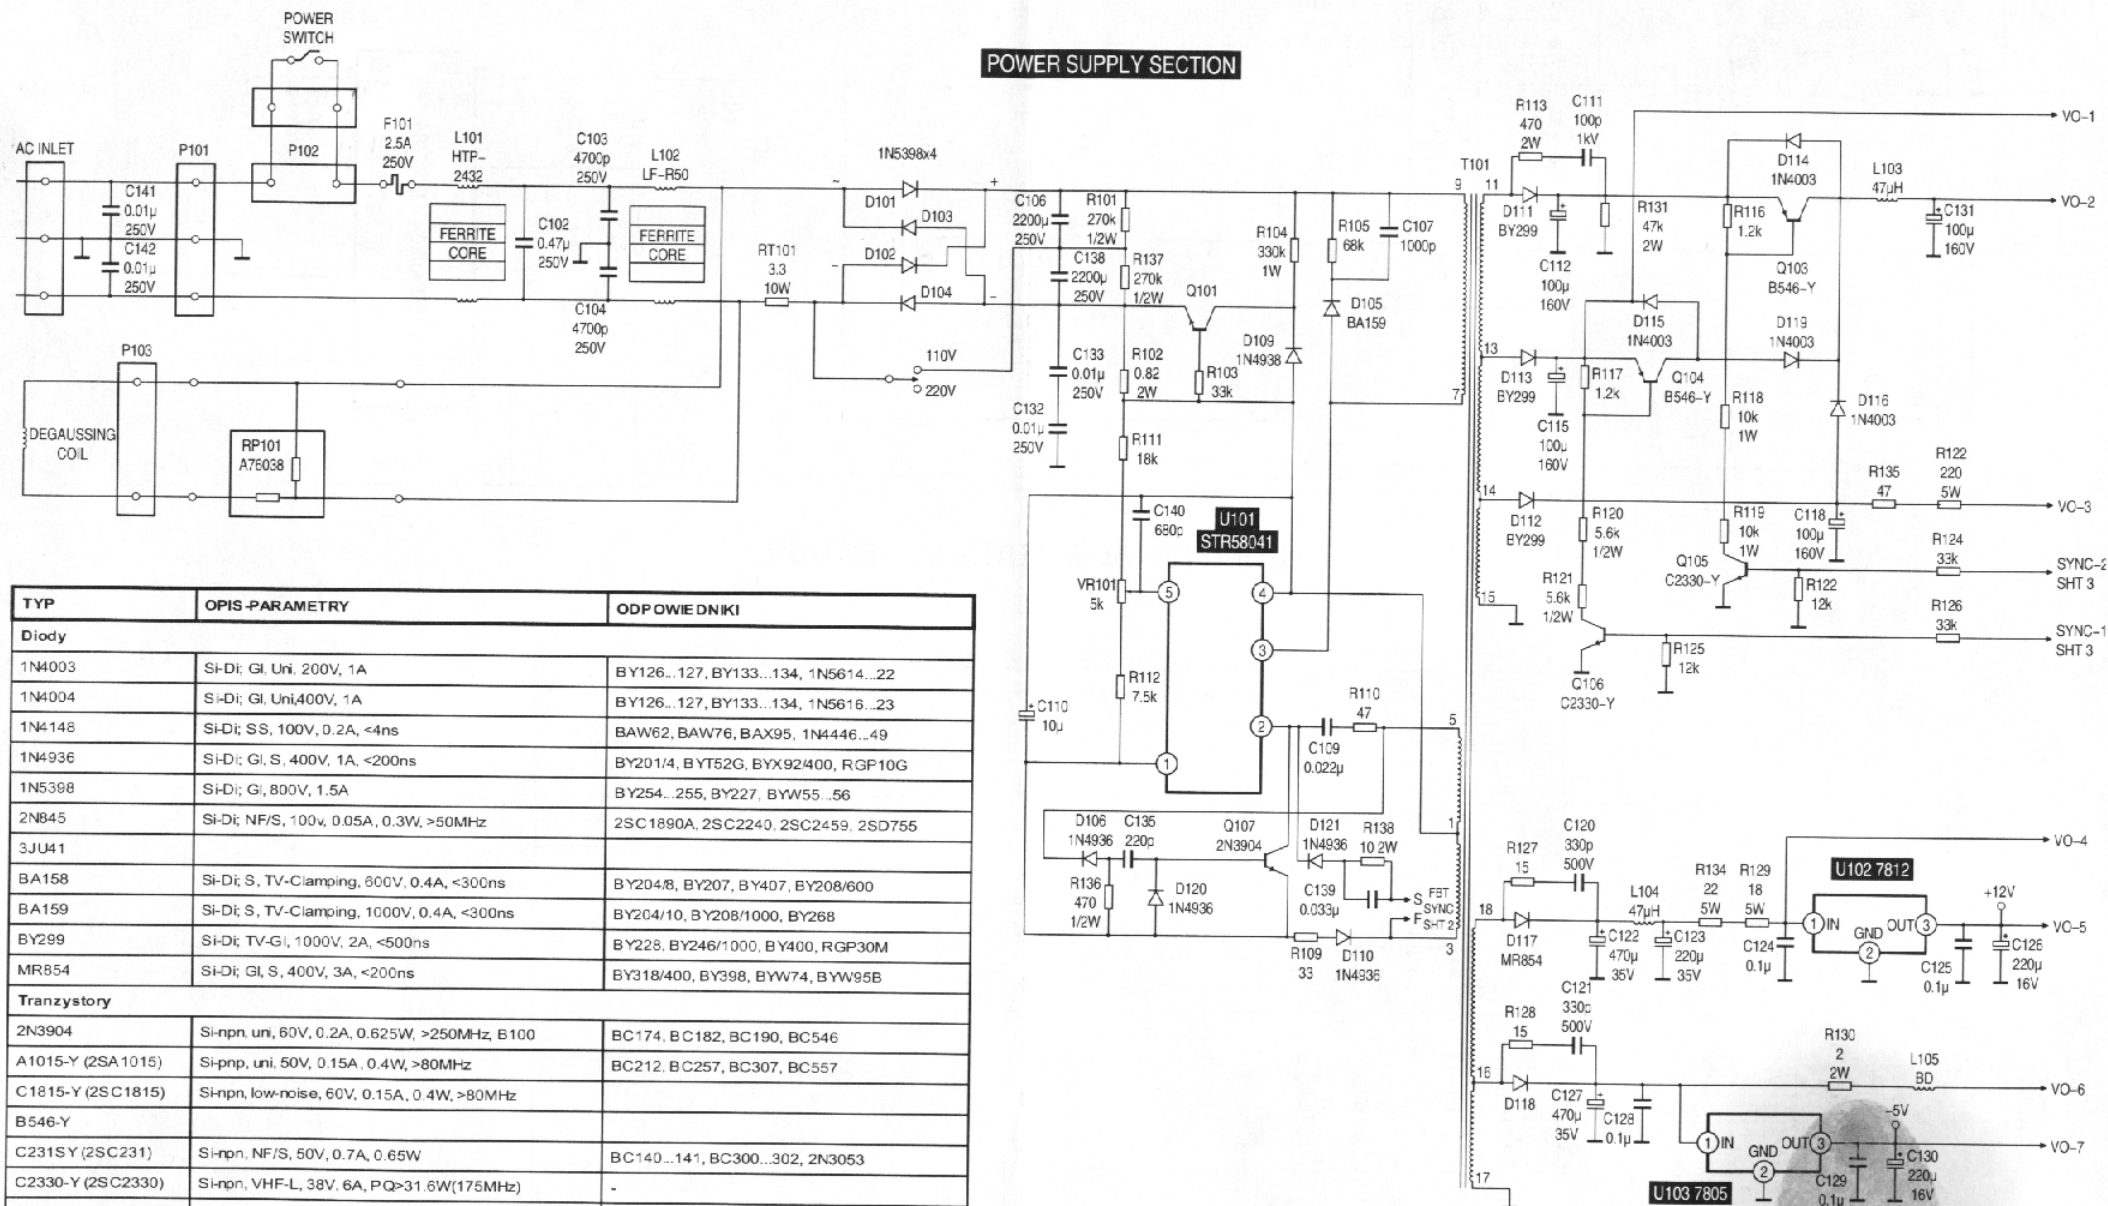

TYP	OPIS PARAMETRY	ODPOWIEDNIKI
Diody		
1N4003	Si-Di; Gl. Uni, 200V, 1A	BY126...127, BY133...134, 1N5614...22
1N4004	Si-Di; Gl. Uni, 400V, 1A	BY126...127, BY133...134, 1N5616...23
1N4148	Si-Di; SS, 100V, 0.2A, <4ns	BAW62, BAW76, BAX95, 1N4446...49
1N4936	Si-Di; Gl. S, 400V, 1A, <200ns	BY201/4, BYT52G, BYX92400, RGP10G
1N5398	Si-Di; Gl. S, 800V, 1.5A	BY254...255, BY227, BYW55...56
2N845	Si-Di; NF/S, 100V, 0.05A, 0.3W, >50MHz	2SC1890A, 2SC2240, 2SC2459, 2SD755
3JU41		
BA158	Si-Di; S, TV-Clamping, 600V, 0.4A, <300ns	BY204/8, BY207, BY407, BY208/600
BA159	Si-Di; S, TV-Clamping, 1000V, 0.4A, <300ns	BY204/10, BY208/1000, BY268
BY299	Si-Di; TV-Gl, 1000V, 2A, <500ns	BY228, BY246/1000, BY400, RGP30M
MR854	Si-Di; Gl. S, 400V, 3A, <200ns	BY318/400, BY398, BYW74, BYW95B
Tranzystory		
2N3904	Si-npn, uni, 60V, 0.2A, 0.625W, >250MHz, B100	BC174, BC182, BC190, BC546
A1015-Y (2SA1015)	Si-npn, uni, 50V, 0.15A, 0.4W, >80MHz	BC212, BC257, BC307, BC557
C1815-Y (2SC1815)	Si-npn, low-noise, 60V, 0.15A, 0.4W, >80MHz	
B546-Y		
C231S-Y (2SC231)	Si-npn, NF/S, 50V, 0.7A, 0.65W	BC140...141, BC300...302, 2N3053
C2330-Y (2SC2330)	Si-npn, VHF-L, 38V, 6A, PQ>31.6W(175MHz)	-
C2369-Y (2SC2369)	Si-npn, UHF, 25V, 0.07A, 0.25W, 4.5GHz	BFP96, BFQ73, 2SC2844, 2SC3302
C2482-Y (2SC2482)	Si-npn, TV-FA-Tr, 300/300V, 0.1A, 0.9W	2SC3468, 2SC4166
C3198-Y (2SC3198)	Si-npn, uni, low-noise, 60V, 0.15A, 0.4W, 130MHz	2SC1775(A), 2SC2240, 2SC2390, 2SC2459
C3886A (2SC3886A)	Si-npn, SN, HA, hi-res, 1500/600V, 8A, 50W	2SC3894, (BU508AF)
KSA196Y		
KSC23	Si-N, NF-Tr/E, 120V, 0.8A, 0.9W, 120MHz	2SC2235, 2SC2383, 2SD667, 2SD1665
KSR1008	Si-N+R; S, Rb=47kW, Rbe=22kW, 50V, 0.1A, 0.3W	AA1L4L, DTC144WS, RN1009, UN421E
KTA1015Y	2SA1015	2SA1015
KTC1815Y	2SC1815	2SC1815