


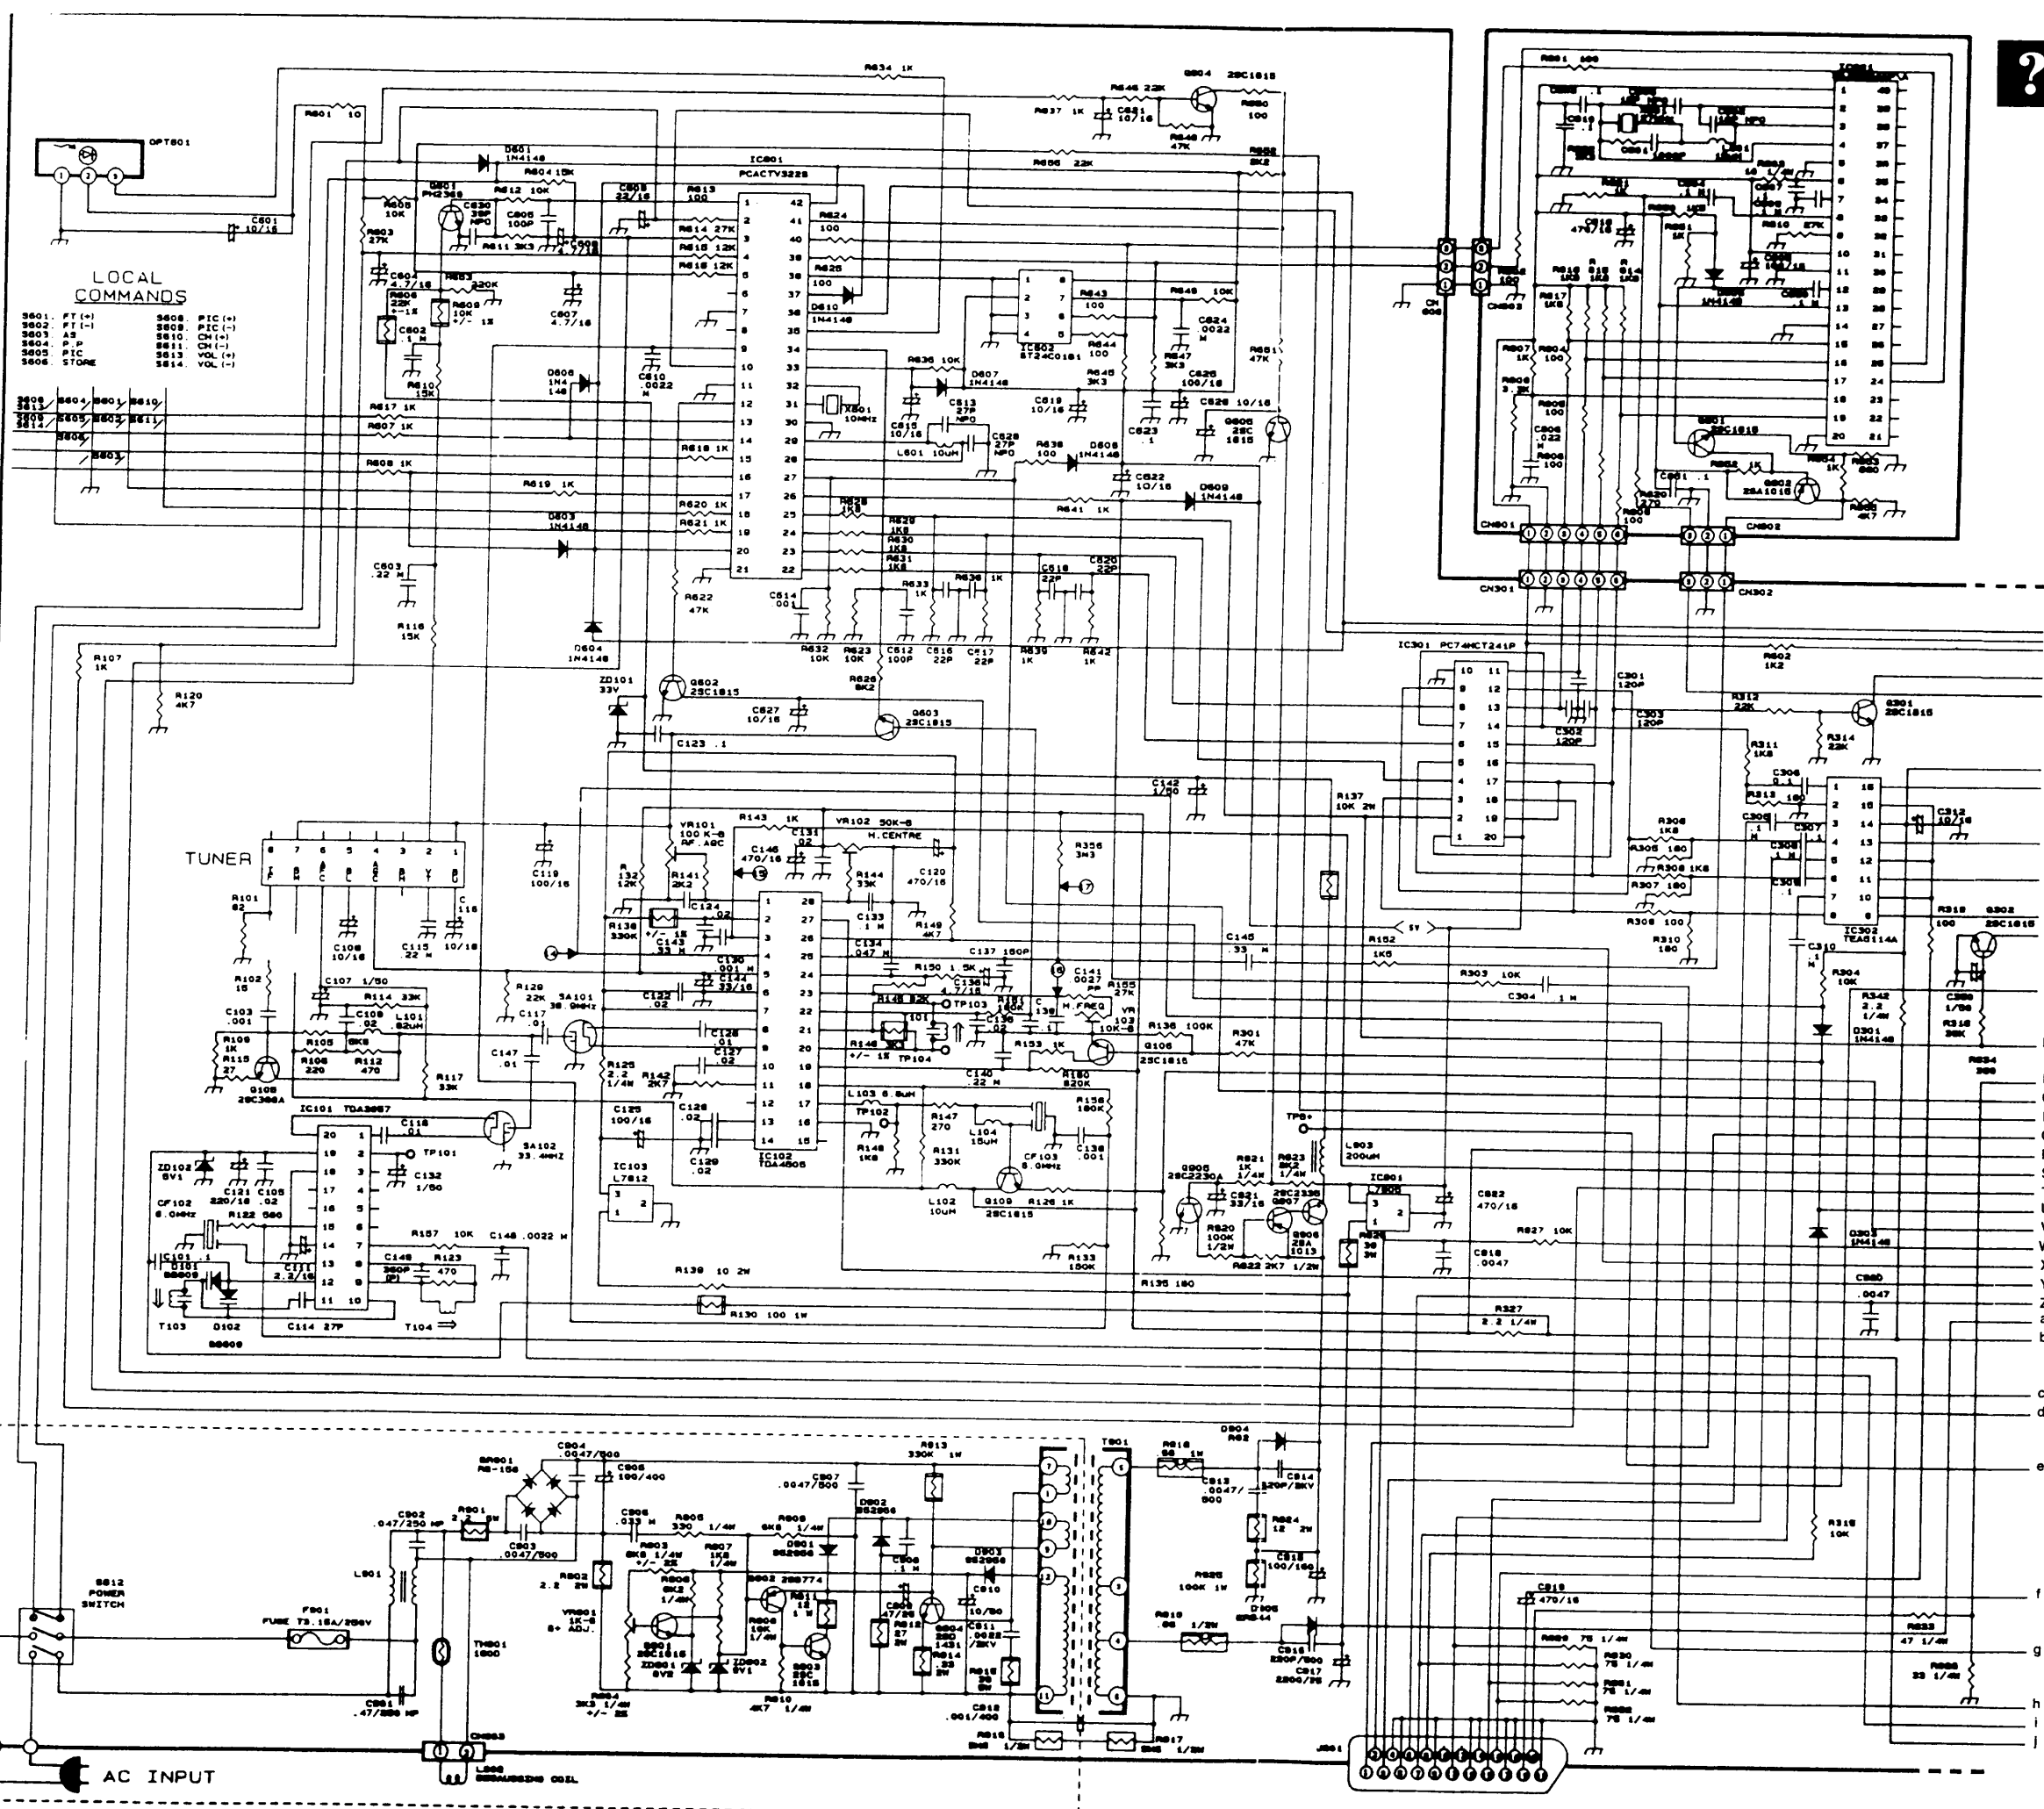

?

Transistors

TR No.	B DVC	C VDC	E VDC
Q105	1.13	8.5	0.4
Q110	4.1	9.6	0.7
Q111	0.01	4.8	0
Q201	16.3	15.7	15.6
Q301	0	2.9	0
Q302	2.13	11.4	1.5
Q305	0	1.9	0
Q401	0.4	56.2	-0.01
Q402	-0.08	108.9	0
Q601	0.6	2.01	0
Q602	0.7	0.06	0
Q603	9.2	12.2	8.7
Q604	0	0.24	0
Q605	0.3	1.1	0
Q901	9	19.7	8.4
Q902	7.9	0.07	2.3
Q903	0.07	2.0	0
Q904	-1.69	258	0.6
Q905	0.6	0.04	0
Q906	109.5	110	110.1
Q907	110	110.1	109.4
Q501	3.13	134.2	2.6
Q502	3.6	128.4	2.6
Q503	3.1	127.4	2.6
Q701	0	3.0	0
Q801	1.8	4.3	1.2
Q802	4.3	2.3	4.9

Continued at 1

Ref.	20" Value
CRT	20" CRT
L501	180 uH
C419	200P/2KV

40p	90p
IC602	ST24CC01B1
IC602	'1' connect GND
IC602	'2' connect +5V
HYPER TUNER	
R606	15K
R610	10K
R116	10K
NORMAL TUNER	
R606	22K
R610	15K
R116	15K

1



LOCAL COMMANDS FOR IC701						
1.	0	9	8	17	VOL PIC (-)	25 CH (-)
2.	1	10	9	18	VOL PIC (+)	26 CH (+) LIST FASTEXT
3	2	11	-- PAGE (-)	19	PAGE HOLD	27 TIMER
4	3	12	PAGE (+)	20	SUBCODE	28 AV
5	4	13	STAND BY	21	LARGE	29 PIC
6	5	14	MUTE	22	REVEAL	30 TX
7	6	15	P P	23	CANCEL	31 TV ON
8	7	16	RECALL	24	MIX	32 ST MC LII